

JUST-IN-TIME INVENTORY SAVES YOU MONEY

BRANDS YOU Know and trust



MIXED AND FULL TRUCKLOAD DELIVERY

OVER 70,000 Skus available In Job Lot Quantities

GREEN CERTIFIED PRODUCTS



MEET BLUELINX

The Country's Largest Distributor of Building Products

BlueLinx provides distribution services and flexible delivery options to thousands of customers nationwide. With more than 55 years of experience in the building products distribution business, you can rely on BlueLinx as a trusted partner who is committed to the success of your business.

As the nation's largest distributor, our product offering includes more than 10,000 items and 70,000 SKUs, featuring an array of the industry's most well-respected brands. With a unique combination of market position and coverage, the strength of a national sales team with local knowledge, the buying power of centralized procurement, a sophisticated logistics network, and industry-leading technology, BlueLinx tailors a wide range of value-added services to customers. To learn more, contact us at **1-888-502-BLUE**.

Becoming a BlueLinx customer

BlueLinx sells to dealers, industrial manufacturers, manufactured/modular home builders, and home improvement centers through a network of 70+ warehouses and 50+ reloads. With access to our large offering of acclaimed brands, in addition to BlueLinx portfolio brands that are sourced and specified to meet strict quality guidelines, customers purchase products through a company-provided credit line that acts as a source of working capital. We also provide flexible transportation options (break bulk, mixed trucks, just-in-time deliveries) to ensure successful delivery.


Call Today 888-502-BLUE

Checklist for becoming a customer

- Be a dealer, industrial manufacturer, manufactured/modular home builder, or home improvement center.
- Own a forklift or have access to one on delivery day.
- Have accepted means of payment: check, ACH, or wire.
- Pass a credit background check to qualify for a line of credit.
- ✓ Call your local BlueLinx sales representative at 1-888-502-BLUE or ask to be directed to someone who covers your geographical area. Your sales representative will set up a meeting with you and a BlueLinx territory sales manager to assess your business needs.
 - Once you have met with your territory sales manager, download customer forms from the New Customers/Vendors section at www.BlueLinxCo.com under Contact Us. Fax your completed forms to (770) 221-8888, attention Credit Management Department, or e-mail your forms to BlueLinxNewCust@BlueLinxCo.com.

Window into BlueLinx

Headquartered in Atlanta. Employs 2,000. Owns 70+ locations, 50+ reloads and a fleet of more than 600 trucks and 1,000 trailers. Sells to more than 11,500 customers operating 25,000 locations across the United States, Mexico, Canada, and the Caribbean Islands.





METAL

INSULATION

ROOFING

Our warehouse pulls in on request.

Just-in-time inventory.

When you order inventory from BlueLinx, it's like having your very own warehouse. But without the messy overhead.

Order exactly what you need – whether it's a job lot quantity to optimize inventory levels or a full truckload to meet high-volume needs.



Sales: 888-502-BLUE • www.BlueLinxCo.com

CONTENTS

Roofing



Info Corner: Shingles

Is it any wonder why almost 80 percent of homes in North America use asphalt shingles as the roofing material of choice?

Owens Corning [®] Duration [®] 30 yr., Duration Designer 30 yr., Oakridge [®] 30 yr., Supreme [®] 25 yr., High Ridge Hip & Ridge, Perforated Hip & Ridge, Specialties	14-19
IKO Cambridge 30 yr. AR, Marathon 25 yr. AR 3-Tab, Hip & Ridge 12, Specialties	20-21
BlueLinx Tough-Guard [®] BlueLinx Tough-Guard Ice & Water, Window & Door Flashing	22-23
Roofing Accessories Kwik Ply Membrane Roofing, Rolled Roofing, Shingle Starter, Cedar Shakes & Shingles	24-25
Felt Atlas Felt, Generic Felt,	26-27

FelTex[™] High Performance Roofing Underlayment





Insulation

Info Corner: Earn LEED points Insulation choices impact site planning, energy consumption, water usage, indoor air quality, and building materials.	
Johns Manville Unfaced/Kraft-Faced Batts and Rolls, Climate Pro [®] /Attic Protector [®] Blow-in Fiberglass	35-37
CertainTeed Fiberglass Insulation Unfaced/Kraft-Faced Batts and Rolls	38-39
Dow STYROFOAM SIS [™] Brand Structural Insulated Sheathing; Polyisocyanurate Insulation: TUFF-R [™] , Super TUFF R [™] , TUFFMAX [™] White Finite, TUFF R [™] ,	40-52

Sheathing; Polyisocyanurate Insulation: TUFF-R[™], Super TUFF-R[™], THERMAX[™] White Finish, THERMAX[™] Sheathing, FROTH-PAK[™] Foam Insulation Kit, FROTH-PAK[™] Foam Sealant Kit; Extruded Polystyrene Foam Insulation: DURAMATE[™] Plus, Scoreboard, Residential Sheathing, Tongue & Groove, WALLMATE[™], BLUECOR[™]; Housewrap: WEATHERMATE[™] Housewrap, WEATHERMATE[™] Plus Housewrap, WEATHERMATE[™] Construction Tape, STYROFOAM[™] Sill Seal Foam Gasket

Siding & Trim

Info Corner: Vinyl Siding Vinyl siding has become one of the most popular choices for new siding because it's economical and fairly durable.



Nichiha NichiBoard [™] Pre-Finished Lap Siding, Sierra Premium [™] Shake Plus, NichiBoard [™] Primed Lap Siding, NichiSoffit [™] Primed Soffit, NichiPanel [™] Primed Panels	56-59
Plycem Fiber Cement Trim	60-61
Vinyl Siding Seasons [™] High Performance Insulated Siding, Cedar Lane [®] Select, Heritage Hill [™] , Forest Ridge [®] , Shadow Ridge [®] , Vision Pro [®] , Chatham Ridge [®] , Board & Batten Single Vertical, Castle Ridge [®] , Somerset [™] ; Cedar Spectrum [™] : Hand-Split and Shingle Round Cut Siding, Accessories; Parkside [®] : Siding, Vinyl Skirting, Accessories	62-73
Vinyl Soffit and Accessories	74-81
Richwood [®] Mounting Blocks & Vents, Shutters, Window Mantels, Designer Accents	82-97
Ply Gem Stone Cut Cobblestone, Fieldstone, Shadow Ledgestone, Ledgestone, Ridgestone, Tuscan Fieldstone, Cobblestone, Riverstone, Brick, Stone Accessories, Brick Accessories	98-106
Metal Products	
Info Corner: SteelLinx® SteelLinx is a comprehensive line of metal building products — free fasteners to fencing to roofing m	om
SteelLinx Rebar Reinforcing Bar, Rebar Pins	112-113
Remesh Mesh Rolls, Mesh Sheets	114-116

Concrete Accessories

Bar Supports – Metal & Plastic, Reinforcing Accessories & Forming Products, Stakes, Expansion Joints, Zip Strips, Chamfer Strips, Site Accessing Products

Metal Studs & Framing	130
Strapping Solutions	131
Metal Connectors Face & Top Mount Joist Hangers, Face Mount LVL Hangers, Skewed 45 Hangers, Other Framing Connectors	132-133
Metal Roofing KenLoc, MechLoc, StayLoc, FastPanels	134-136
Metal Accessories Flashings, Drip Edge, Gutter Apron	138
Additional Metal Items Corner Bead, Steel Plywood Clips	139
Siding Metal Accessories Starter Strip, Soffit, Trim Coil, Fascia	140
Nails Electro Galvanized Roofing Nails, Duplex Nails,	141-145
Plastic Cap Nails, Plasti-Top Fasteners, Coil Roofing, Cement Coated Sinker Nails	
Screws Decking, Sub-Floor, Drywall	146-148

118-129

З

CONTENTS

Specialty Lumber & Flooring




Info Corner: Essential flooring definitions What's the difference between plank flooring and strip flooring?

Pine Boards & Pattern Stock Ponderosa, White Wood	152
Premium Boards C & Better Pine, Arauco Twin Coat Primed	153
Hardwood Boards Poplar, Red Oak, Primed Poplar	154
Stepping	154
Flooring and Beaded Ceiling Doug Fir, Doug Fir Beaded, Underlayment Pads, Plywood Underlayments, Tack Strip and Seam Tapes, To	156-157
Furring Strips	158
Shims, Bridging, & Lath	159
Cedar Products Decking, Boards, Dimension, Timbers, Balusters, Siding, Shakes and Shingles (Page 25)	160

Woodtone RealTrim [™]	161-162
Boards, Dimension, Posts and Accessories	



Structural **Framing Products**

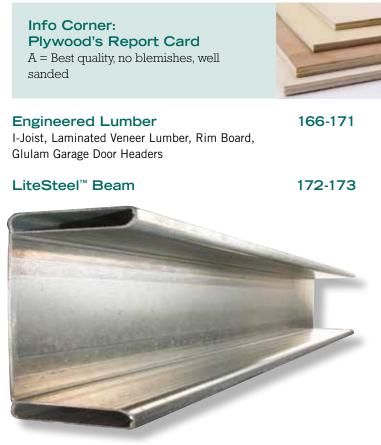

Plywood Siding Plybead[®], Rough Sawn, Shallow Groove, T1-11, Reverse Board & Batten

174-175

Sanded Plywood

AA Fir & Pine, AB Fir & Pine, AC Fir & Pine, AC Fir Superply, Arauco® AC Pine, BC Pine, BBOES, SYP Sheathing & Underlayment, Georgia Pacific SYP Premium Underlayment, Dricon[®] Fire-Treated Plywood

Specialty Plywood

180-181

176-179

Medium Density Overlay, High Density Overlay, Marine Grade



OSB & Sheathing Louisiana Pacific OSB, Weyerhauser® OSB, Fir Sheathing & Underlayment

187



Industrial & Decorative Panels

Green Memo: What is CARB certified? Make the right choice in hardwood plywood, particleboard, and MDF.



5

Hardwood Plywood Okoume, Lauan/Meranti, Domestic Hardwood Plywood, Import Hardwood Plywood, UltraPly® Premium Underlayment, Bending Lauan	192-199
Particleboard Particleboard Stair Treads, Particleboard Shelving	200-202
Melamine Melamine Shelving	203
CARB Certified Thermafused Melamine Sheetstock, MDF Sheetstock, P/B Sheetstock, Countertop	203-204
Hardboard Sheetstock, Additional Hardboard Items	207-208
Tileboards Lionite [®] , Jubilee [®]	209
Engineered Wood Substrates – MDF Backer Paneling Mount Vernon®	209
Real Wood Paneling	210

R Timber Ridge[®], McKenzie[®], Bedford Village[®]

CONTENTS



Outdoor Living



Info Corner: Composite or wood decking? Compare materials, style, cost, and maintenance.

GAF[®] Decking Systems

215-227

CorrectDeck CX[®], DuraLife[™], DuraLife[™] RailWays[®] Universal Railing, RailWays Post Sleeve, RailWays Railing Cap, RailWays Base Trim, RailWays Hardware Kit, CorrectPorch[®] Flooring, CorrectPorch Tread, CorrectPorch Trim, CorrectPorch Screws, CorrectDock[™] Dock Plank, CorrectDeck CX Care Kit, CorrectDeck CX Pen Kit, CorrectDeck CX Stain, CorrectDeck CX Screw Pack



Moulding & Millwork

Info Corner: What species is best? Cost and desired look must be determined. Moulding falls into one of four categories.



234-239

HB&G Columns

PermaCast[®] Columns: Plain Round, Fluted Round, Tuscan Cap & Base Set – Round, Plain Square, Recessed Square, Tuscan Cap & Base Set – Square, Craftsman Square; Wood Columns: Plain Round, Fluted Round, Standard Poly Cap & Base Set – Round Wood





Other Building Products

Info Corner:

Anatomy of a solar panel Once a frame and junction box are affixed, voilà! Time for inspection.



PureSky Solar™	282
SolarWorld Modules, Inverters, Sunmodules [®] , Solar Fans, Solar Accessories	283-285
Softboard Sheathing	287
Poly	287
Packaging Supplies Corrugated Boxes, Mailing Tubes, Additional Packaging Items	288
Red Rosin Paper	290
Edge Protectors	290



Posts & Accessories PermaPosts®, PermaPost Fastening Systems, Aluminum Plinth Blocks, Column Installation Kits

Moulding Profile Directory

242-278

240-241

VISIT BlueLinx .

LETTER FROM BLUELINX



Navigating the U.S. building material supply industry can be overwhelming. But what if Dear Valued Customer: you had access to over 10,000 products and flexible transportation options through one company? Enter the BlueLinx Advantage.

If you're already a customer, you've experienced the value of BlueLinx as a partner for your residential or commercial building project. If you're evaluating our product line and valueadded services for the first time, you picked the right time to become a customer!

In this 2011 BlueLinx Product Catalog highlighting items that total 70,000 SKUs now within your reach, you may also learn the advantages of composite decking over wood decking, how to choose the best shingles, or what materials can help you apply a green strategy to your next project. We've not only produced an *industry-first* print catalog that aggregates our wide inventory to speed up the process of finding the products you and your customers buy every day. We've also assembled expert tips and other helpful information

related to common tasks and trends built around your workday.

The 2011 BlueLinx Product Catalog is color-coded and category-tagged for immediate results to your seach. The catalog includes our latest selection in the following categories: Structural Framing Products, Industrial & Decorative Panels, Roofing, Insulation, Metal Products, Siding & Trim, Specialty Lumber & Flooring, Outdoor Living, Moulding & Millwork, and Other Building Products. If you're wondering whether we carry a particular item in your region, rest assured! Each catalog has been designed to match a specific

geographical area according to products carried in that local market.

BlueLinx has been a leader in the building products industry for more than 55 years.

We're proud to say that customers are often taken by surprise when they discover the full range of product and service options available to them through our company.


Thank you for trusting BlueLinx to be your partner. For questions or to place an order, please call us at 1-888-502-BLUE (2583). For your convenience, our local catalogs can also be accessed online at www.BlueLinxCo.com/ProductCatalog.



Sincerely,

BlueLinx Employees

LET BLUELINX BE YOUR WAREHOUSE

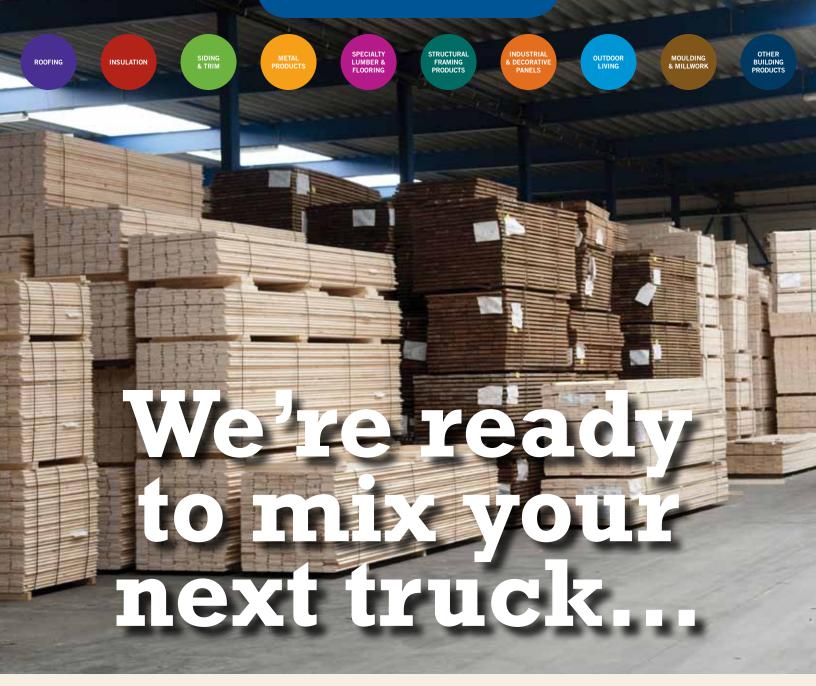

Over 70,000 different ways.

Call BlueLinx and gain access to the industry's leading selection of building products – more than 70,000 SKUs!

Lower your storage and transportation costs by ordering quantities that fit your needs. Receive express turnaround time on all orders. Get the customer service our seasoned professionals are known for.



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. @2010 BlueLinx Corporation. All rights reserved.

FSC CERTIFICATION



FSC: A program you can't afford to ignore

The Forest Stewardship Council (FSC) is an international organization of certifiers, forest products businesses, and environmental groups that brings people together to find solutions that promote responsible stewardship of the world's forests. FSC also operates a program that provides accreditation services to companies based on international standards. BlueLinx has indeed, earned FSC's certification!

What do forests have to do with BlueLinx, and how can our Chain-of-Custody Certification (CoC) help your business? This certification assists your business with market access in an increasingly environmentally aware sector. It demonstrates that you take the environmental concerns of your customers and staff seriously. CoC certification can be used to establish compliance with public or private procurement policies and specifications such as the U.S. Green Building Leadership in Energy and Environmental Design (LEED) rating system.

FSC CoC certification is for operations that manufacture, process, or trade in timber or non-timber forest products. CoC allows credible tracking of FSC material from the forest, through all successive stages of the production process, to committed retailers and consumers. Our customers request products that are associated with the FSC program in order to:

- Create new product sales opportunities. CoC certification requires operations to identify the origin of raw materials used in FSC certified products and to keep FSC certified products separate from other products throughout the production process.
- Assure customer satisfaction. The FSC CoC certification program provides the link between responsible production and consumption that enables the consumer to make socially and environmentally responsible purchasing decisions.
- Instill confidence in their products and sustainability track record.
- Support their customers' green programs.
- Earn LEED[®] points, along with other green program credits.
- Play a part in protecting our forests while furthering growth in our industry.

For more information about BlueLinx' CoC certification or to read the BlueLinx Forestry Policy, visit: http://bluelinxco.com/ OurProducts/Sustainability/ForestryPolicy.aspx.



Prime number

According to Rainforest Alliance, for commercial construction, LEED-NC and LEED-CI Materials & Resources credit 7 (MR 7) requires that at least 50% (measured by cost) of the wood building components permanently installed in a LEED-registered project be FSC certified in order to earn one point toward LEED certification.

FSC CERTIFICATION



How can BlueLinx help you benefit from this prestigious program?

BlueLinx deals in many FSC CoC certified product types including: lumber, plywood, particle board, and moulding and millwork. In 2009, plywood was the largest volume of FSC CoC certified materials moved through BlueLinx. Why? Perhaps because FSC certified softwood framing lumber and plywood are a good starting point for green building both because of the large percentage of wood building products used in these structures and the increasing availability of these materials nationwide.

All BlueLinx sales personnel have been trained on FSC CoC materials transactions and can assist you for sourcing FSC CoC materials. They can answer your questions on products that qualify. Call your sales manager today!

BlueLinx can help you receive LEED credit where credit is due, ensuring that your certified wood products are FSC certified wood products. There are other certification systems out there, but they are not recognized by USGBC for LEED credit. For customer records to verify that a vendor and the products purchased are FSC certified, your BlueLinx invoice will denote FSC CoC certified products on a line-item basis. Also, all invoices include the BlueLinx FSC CoC number (SW-CoC-002525) for validation.

Building with Building with BlueLinx EcoProducts Portfolio Brand

BlueLinx is dedicated to helping you build residential houses and commercial properties that are easy on our earth's treasured natural resources. Our ever-expanding portfolio of products features many or all of the green attributes that sectors related to our business are expected to employ and advance. Hundreds of these products are within your reach from the following categories:

- Thin Board
- Plywood Panels
- Engineered Lumber
- Specialty Lumber
- Gypsum
- Commodity Wood Products
- Commodity Lumber
- Particleboard

- MDF
- Siding & Trim
- Moulding & Millwork
- Hardwood
 - Insulation
- Roofing
- Decking
- Concrete Products
- Metals

πппт	יז דייד כ	ΤΤΠΤ	$\cap \mathbf{NTC}$
АББГ	τ F. V	IAII	ONS

ABBREVIA	TIONDEFINITION
AA A	
AB A	
AC A	
ΑΚ	ARCHITECTURAL KNOTTY
AR	ALGAE RESISTANT
ASTM	AMERICAN SOCIETY OF TESTING MATERIAL-RATED
BB/CC	B FACE B BACK C CROSSBANDS
BC B	
BK	BACK
BNEF	BULL NOSED EDGE FILLED
BTR	BETTER
	STEEL C TRACK
	CASING
	CARTON
	DOUBLE RABBET
	EASED 2 EDGES
	ELECTRO GALVANIZED
	ENGLEMANN SPRUCE LODGEPOLE PINE
	EXTERIOR
	GRADE
	GRADE
	STEEL H STUD
	HIGH DENISTY OVERLAY
	HEAT TREATED
	HI TENSILE (STEEL STRAPPING)
J-PLAT	
KD	KILN DRY
LAU	LAUAN
LB	
LD	DEAD LOAD
LL	LIVE LOAD
	LAMINATED VENEER LUMBER
	LIKE WOOD MOULDING
	MEDIUM DENSITY FIBERBOARD
	MEDIUM DENSITY OVERLAY
	MOISTURE RESISTANT
	OPENING
	ORIENTED STRAND BOARD
	OUTSIDE CORNER

PB	
PET	
PF	
PK	
PLK/MCH	PLANK MATCHED
PRMD	
PS	
PTS	
PVC	
R/F	
R/L	
R/W	
RBT	
RC	
RD	
RE	
RS	
RTD	
\$1\$	
\$1\$	
S1S2E	
\$2\$	
\$25 \$45	
S4S	
SD	
SDG	
SE	
SHTG	
SISSTRUCT	
SM	
SPF	
SS	
SS	
STD	STANDARD
STK	
SW	SHRINK WRAPPED
SYP	SOUTHERN YELLOW PINE
T/L	TRUCK LOAD
T&G	
TRD	TRADITIONAL
U/L	UNDERLAYMENT
UPC	. UNIVERSAL PRODUCT CODE
UTL	
V/C	VENEER CORE
VG	VERTICAL GRAIN
WM	WOOD MOULDING
WPF	WHOLE PIECE FACE
WRC	WESTERN RED CEDAR

Roofing

Owens Corning
IKO
BlueLinx Tough-Guard
Kwik Ply
Roof Flashing
Roofing Accessories
Atlas Felt
Generic Felt
Feltex

Roofs have personality too.

Raise the roof confidently

Materials selection is the cornerstone of roofing. Beneath the shingles or single-ply are accessories that, if compromised, can cost the homeowner thousands of dollars, or worse, physical harm. The following accessories must be of adequate quality and as dependable as the primary roofing material:

- 1. Roof gutter systems. Prevent costly damage to entryways, decking, walkways, landscaping, foundations, and siding.
- 2. Attic venting systems. Preserve the structural integrity of the roof by decreasing heat and moisture.
- 3. Sun tunnels and skylights. Provide natural light and fresh air without allowing for leaks.
- 4. Decking. Make sure it's waterproof and made with exceptionally durable material.

Owens Corning

Bring fashion to your roof.

Made with brilliantly colored granules that add richness and dimension in a wide array of colors, Owen Corning's stunning shingles are designed for long-lasting performance. Since 1977, Owens Corning has been a leading manufacturer of shingles and accessories for the residential roofing market. Though best known for their PINK FIBERGLAS® insulation, Owens Corning is also a leader in the roofing market. In fact, according to a Hanley-Wood Publishing survey of 3,400 U.S. builders, Owens Corning Roofing products were voted "the most recognizable brand in the market." Since Owens Corning invented glass fiber during the 1970s, it has become the material standard for shingles, and is used by most shingle manufacturers. The fiberglass composition of roof shingles plays an important role in protecting homes from moisture and other weather-related elements.



Every Owens Corning shingle line features:

- FIBERGLAS[®] mat that adds weather protection, greater fire resistance, and longer life.
- Weathering-grade asphalt that holds the granules on the shingle and protects the roof from water.
- Colorful mineral granules that help reflect the sun's rays while adding beauty and style to the roof.
- Heat-activated adhesive strips that bond shingles into a single, watertight unit.
- Class A Fire Rating, the highest available for residential applications.
- Wind Resistance Rating for winds and gusts up to 110 mph depending on the shingle style selected.
- Limited product warranties ranging from 20 to 50 years, depending on shingle style.

Owens Corning Duration 30 yr.

Duration shingles feature gentle shadow lines and high-performance construction for a shingle that upgrades any home. The distinct and vivid color combinations of Duration shingles give the look of deep dimension and are sure to dial up your home's curb appeal.

MINNEAPOLIS STOCK IN CHICAGO AND MEDINA STOCK IN DETROIT & GRAND RAPIDS			
ITEM #	COLOR		
733909	AMBER		
733910	BROWNWOOD		
643157	CHATEAU GREEN		
733917	COLONIAL SLATE		
733908	DESERT TAN		
733912	DRIFTWOOD		
733914	ESTATE GRAY		
691346	HARBOR BLUE		
728986	ONYX BLACK		
691345	QUARRY GRAY		
733916	SIERRA GRAY		
733911	TEAK		

SUMMIT STOCK CHICAGO & ST. LOUIS ITEM # COLOR 121669 AMBER 121684 BROWNWOOD 121748 CHATEAU GREEN 121804 COLONIAL SLATE 121868 DESERT TAN 122223 DRIFTWOOD 122244 ESTATE GRAY 122269 HARBOR BLUE 122352 ONYX BLACK 122372 QUARRY GRAY 122390 SIERRA GRAY 122605 TEAK

DURATION COLORS



AMBER

DESERT TAN



CHATEAU GREEN

COLONIAL SLATE



DRIFTWOOD



ESTATE GRAY HARBOR BLUE



ONYX BLACK

QUARRY GRAY





SIERRA GRAY

TEAK

* Colors shown may vary from actual material. Request color samples for true representation.

ITEM # COLOR 112479 MERLOT 112233 SAND DUNE 112459 SEDONA CANYON 112332 STORM CLOUD 112273 SUMMER HARVEST

DURATION DESIGNER COLORS

provide curb appeal and performance that endures.





Owens Corning Duration Designer 30 yr.

The distinct and vivid color combinations of Duration shingles Designer Colors Collection

MERLOT





SEDONA CANYON

STORM CLOUD



SUMMER HARVEST



GO TO PAGE 141 **DR ROOFING NAILS**

Owens Corning Oakridge 30 yr.

Oakridge shingles have a warm, inviting look in popular colors for a step up from traditional three-tab shingles. Adding to their appeal, these shingles are engineered to resist roof discoloration from algae growth.

.

MINNEAPOLIS STOCK IN CHICAGO AND MEDINA STOCK IN DETROIT & GRAND RAPIDS			
ITEM #	COLOR		
733814	BROWNWOOD		
733820	CHATEAU GREEN		
733813	DESERT TAN		
733815	DRIFTWOOD		
733817	ESTATE GRAY		
733816	ONYX BLACK		
732969	SIERRA GRAY		
733821	TEAK		

SUMMIT STOCK FOR			
CHICAGO 8	ST. LOUIS		
ITEM #	COLOR		
123084	BROWNWOOD		
123050	CHATEAU GREEN		
123040	DESERT TAN		
123024	DRIFTWOOD		
123001	ESTATE GRAY		
122981	ONYX BLACK		
122970	SIERRA GRAY		
122957	TEAK		

Owens Corning Supreme 25 yr.

Supreme shingles offer more performance in a value-priced shingle.

MINNEAPOLIS STOCK IN CHICAGO AND MEDINA STOCK IN DETROIT & GRAND RAPIDS			
ITEM #	COLOR		
703678	ASPEN GRAY		
700255	AUTUMN BROWN		
629335	BROWNWOOD		
735831	CHAPEL GRAY		
735833	CHATEAU GREEN		
521674	DESERT TAN		
521675	DRIFTWOOD		
521676	ESTATE GRAY		
508516	ONYX BLACK		

SUMMIT STOCK FOR CHICAGO & ST. LOUIS			
ITEM #	COLOR		
122721	ASPEN GRAY		
122760	BROWNWOOD		
122783	CHAPEL GRAY		
122797	CHATEAU GREEN		
122813	COLONIAL SLATE		
122848	DESERT TAN		
122873	DRIFTWOOD		
122903	ESTATE GRAY		
122925	ONYX BLACK		
122937	SHASTA WHITE		
122948	TEAK		

OAKRIDGE COLORS



BROWNWOOD



DESERT TAN

DRIFTWOOD



ESTATE GRAY

BLACK ONYX



SIERRA GRAY

TEAK

SUPREME COLORS





BROWNWOOD



COLONIAL SLATE

CHATEAU GREEN



DESERT TAN



SHASTA WHITE

DRIFTWOOD

ONYX BLACK




TEAK

* Colors shown may vary from actual material. Request color samples for true representation.

Owens Corning Warranty

Warranty Information					
Shingle Type	Warranty Length	Tru PROtection Nonprorated Period	Wind	Wind Warranty Length	Algae
Duration	30 YRS	5 YRS	110 MPH	5 YRS	10 YRS
Oakridge	30 YRS	5 YRS	70 MPH	5 YRS	10 YRS
Supreme	25 YRS	5 YRS	60 MPH	5 YRS	10 YRS

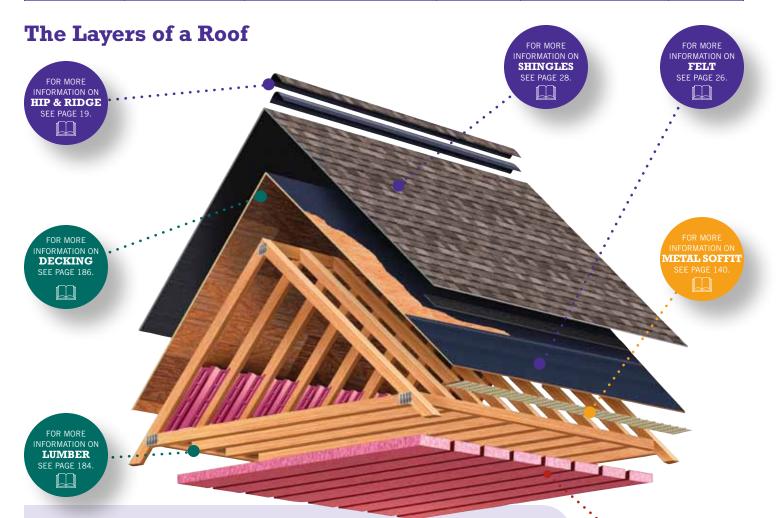

Every Owens Corning shingle line features:

- ▶ FIBERGLAS[®] mat that adds weather protection, greater fire resistance, and longer life.
- Weathering-grade asphalt that holds the granules on the shingle and protects the roof from water.
- Colorful mineral granules that help reflect the sun's rays while adding beauty and style to the roof.
- Heat-activated adhesive strips that bond shingles into a single, watertight unit.
- Class A Fire Rating, the highest available for residential applications.
- Wind Resistance Rating for winds and gusts up to 110 mph depending on the shingle style selected.
- Limited product warranties ranging from 20 to 50 years, depending on shingle style.

FOR MORE

INFORMATION ON

INSULATION SEE PAGE 32.

Info Corner: Shingles

Is it any wonder why almost 80 percent of homes in North America use asphalt shingles as the roofing material of choice? The prevalence of asphalt shingles has created a vast assortment of fittings and fixtures designed to work with them. Asphalt shingles are reasonably priced, low-maintenance, versatile, weather, and sunlight resistant, easy to cut, provide excellent protection on steep sloped roofs, and can be nailed by hand or with powered nailers.

There are two different types of asphalt shingle base material construction — composition and fiberglass. Composition shingles use a base material termed organic felt, which is a blend of paper and wood fibers. Fiberglass, on the other hand, uses a base that is comprised of a fiberglass mat. In both cases, once the base material is produced it is soaked in an asphalt compound. In numbers sold, fiberglass leads the market. These shingles are less expensive, weigh less because they are thinner, have a longer wear life and have a better fire rating than the composition base shingles. *Source: Renovation Headquarters*

> FOR MORE INFORMATION On Ply gem stone Veneer see page 98.

Owens Corning High Ridge Hip & Ridge

Owens Corning High Ridge Hip & Ridge with sealant accentuates the architectural appearance of even the most sophisticated roofs. Its unique layered construction adds dimension, style, and protection to your roof's peak, and the easy-to-fold construction allows for efficient application and a consistent look.

ITEM #	COLOR
640391	AMBER
628738	BROWNWOOD
733923	CHATEAU GREEN
733924	COLONIAL SLATE
621713	DESERT TAN
637441	DRIFTWOOD
621712	ESTATE GRAY
643692	HARBOR BLUE
650513	ONYX BLACK
634838	QUARRY GRAY
733898	SIERRA GRAY
733899	TEAK



Owens Corning Perforated Hip & Ridge

Owens Corning Perforated Hip & Ridge Shingles with sealant add excellent protection and long-lasting beauty to your roof. Designed to help ensure a weather-tight seal in the most vulnerable points on the home — the peaks — it's the perfect finishing touch for any roof.

ITEM #	COLOR
736753	AMBER
736752	BROWNWOOD
736763	CHATEAU GREEN
736758	COLONIAL SLATE
736760	DESERT TAN
736761	DRIFTWOOD
736759	ESTATE GRAY
736757	HARBOR BLUE
736756	ONYX BLACK
736755	QUARRY GRAY
736754	SIERRA GRAY
736762	TEAK



Owens Corning Specialties

ITEM #	SIZE	DESCRIPTION
732753	7.2" X 33.4'	STARTER ROLL
733907	11.25" X 4'	RIDGE VENT
733897	11.25" X 20'	ROLL VENT
737156	7" X 39"	STARTER STRIPS
654993	2 SQ	WEATHERLOCK [®] GRANULAR ICE & WATER



IKO

Precision and natural slate look

IKO's natural slate-like look with precision-engineered roofing materials creates an exceptional and long-lasting roof. Among the first to produce some of the world's finest laminated and architectural-style shingles, IKO's contemporary selection allows customers to select the shingle that suits their individual need and style. Their products are found on distinctive residential, commercial, and engineering structures in more than 50 countries, and they operate over 20 manufacturing plants globally.

IKO Cambridge 30 yr. AR

IKO's time-tested favorite, Cambridge 30 & 30 AR, combines beauty with contemporary strength. Manufactured in a larger size to offer more exposure and create a high-definition shake look, these popular shingles are versatile and easy to maintain.

ITEM #	COLOR
696527	AGED REDWOOD
696528	CHARCOAL GREY
696530	DRIFTWOOD
696531	DUAL BLACK
696532	DUAL BROWN
696529	DUAL GREY
696533	EARTHTONE CEDAR
573114	FOREST GREEN
696535	HARVARD SLATE
696537	NATIONAL BLUE
716437	RIVIERA RED

CAMBRIDGE COLORS

AGED REDWOOD

DUAL BLACK



CHARCOAL GREY

DUAL BROWN



EARTHTONE CEDAR

FOREST GREEN

RIVIERA RED

NATIONAL BLUE

* Colors shown may vary from actual material. Request color samples for true representation.


IKO Marathon 25 yr. AR 3-Tab

Marathon 25 AR shingles are time-tested, traditional three-tab shingles. Offering excellent reliability and supported by a proven track record, these shingles are at the top of their class in terms of performance and value.

ITEM #	COLOR
652914	CHARCOAL GRAY
642145	DRIFTWOOD
642142	DUAL BLACK
642143	DUAL BROWN
293780	DUAL GRAY
642147	EARTHTONE CEDAR
293804	HARVARD SLATE
696543	WEATHEREDWOOD

MARATHON COLORS











DUAL GREY





EARTHTONE CEDAR

HARVARD SLATE

* Colors shown may vary from actual material. Request color samples for true representation.

WEATHEREDWOOD





DRIFTWOOD

HARVARD SLATE

WEATHEREDWOOD

IKO Warranty

Limited Warranty Information Table			
Name of Shingle	Cambridge 30 AR**	Marathon 25 AR**	
Warranty Period (months)	360	300	
IKO "Iron Clad Protection Period" (months)	60	60	
Reduction Figure (first 180 months) *n	n/225	n/225	
Reduction Figure (after 180 months) *m	m/900	m/600	
Maximum Liability/Dollar Limit per Square	40	30	
Standard Application/High Wind Application Warranty (mph) [km/h]	70/110 [112/177]	60 [97]	
Algae Resistance Warranty (months)	120	60	
lisclaimer			

**Hip & Ridge Shingles used for installation of these Shingles must be Marathon Ultra AR, IKO Ultra HP, IKO Hip & Ridge 12 or an IKO Approved equivalent product.

 n^{*} — refers to the number of months that have passed since the Shingles were installed on the building

 m^* — refers to the number of months greater than 180 that have passed since the Shingles were installed on the building

ĥ

IKO Hip & Ridge 12

Lightweight and perforated to give you three pieces, IKO Hip & Ridge shingles are each 12" (300 mm) wide. By spending less time cutting, you'll save on labor costs. Now you can improve the roofline and your bottom line!

ITEM #	COLOR
256882	AGED REDWOOD
256948	CHARCOAL GRAY
256978	DRIFTWOOD
256991	DUAL BLACK
256890	DUAL BROWN
256968	DUAL GRAY
256918	EARTHTONE CEDAR
256907	FOREST GREEN
256984	HARVARD SLATE
256898	HEATHERWOOD
256956	NATIONAL BLUE
256911	RIVIERA RED
256901	WEATHERWOOD

IKO Specialties

ITEM #DESCRIPTION632245IKO LEADING EDGE PLUS STARTER722897STORMSHIELD ICE & WATER

21 h

al h

BlueLinx Tough-Guard

Strong and lightweight

Tough-Guard Synthetic Roofing Underlayment is a strong, lightweight synthetic roofing underlayment that prevents moisture and vapor from entering occupied space. For use in steep sloped residential and light commercial roofing applications, Tough-Guard provides a better solution to traditional roofing felts that add excessive weight, require more handling, and may rot or crack over time. Designed for new construction and re-roofs, Tough-Guard works with traditional roof shingles, tile, slate, metal, and other composite roof materials.

BlueLinx Tough-Guard Ice & Water

All Tough-Guard products are composed of flexible rubberized asphalt reinforced by a fiberglass scrim, forming a composite sheet membrane of at least 40 mm thickness.

Tough-Guard is available in two different variations: Tough-Guard Granular and Tough-Guard Embossed.

- Tough-Guard Granular is a fiberglass reinforced membrane with a granular surface providing maximum skid resistance during installation. Granular is recommended for use under asphalt shingles.
- Tough-Guard Embossed is a rubberized asphalt membrane laminated to a skid-resistant polypropylene film, providing dual-barrier moisture protection. Embossed is recommended for use under asphalt shingles.

ITEM #	SIZE	DESCRIPTION
112218	2 SQ	GRANULAR
112197	1 SQ	GRANULAR
112223	2 SQ	EMBOSSED

Technical Data

Technical Data						
Granular	Embossed					
Black Granular	Black Film					
55 mm	40 mm					
40	40					
0.1	0.1					
no cracking or delamination	no cracking or delamination					
12.0 min.	12.0 min.					
10.0 min.	10.0 min.					
	Black Granular 55 mm 40 0.1 no cracking or delamination 12.0 min.					





Packaging

May vary according to location								
Product	Roll Dimensions	Roll Area	Weight	Rolls Per Package				
Granular	3' x 33.3' (0.91 x 10.2m)	100 ft ³ (9.3 m ²)	35 lbs.	one roll per box				
	3' x 66.7' (0.91 x 20.4m)	200 ft ³ (18.6 m ²)	65 lbs.	one roll per box				
Embossed	3' x 66.7' (0.91 x 20.4m)	200 ft ³ (18.6 m ²)	65 lbs.	one roll per box				

Window & Door Flashing

ITEM #SIZE6946984" x 100'6946996" x 100'

Kwik Ply Membrane Roofing

Versatile and durable

Kwik Ply is a self-adhered roofing membrane designed for use on residential and light commercial buildings provided the area installed does not exceed 5,000 square feet. Kwik Ply combines Elvaloy[®], coal tar pitch, and dispersed polyester fibers in a process that results in a versatile and durable roofing membrane. Kwik Ply products may be installed over various substrates. Before installation can begin, the substrate, its condition, and the assembly components must be identified so that proper materials can be ordered to complete a successful application. Assembly parts are interdependent and selection of the proper materials is an important procedure in a successful application. Kwik Ply can be used in new, re-roof, and retrofit constructions. Resistant to UV, this smooth-surface membrane eliminates the need for torches, kettles, and messy mops.

Kwik Ply Membrane Roofing

ITEM #DESCRIPTION612621BLACK473054PRIMER - 1 GALLON

Roof Flashing

Flashing provides extra protection against leaks and water damage.

Although roof flashing is occasionally fabricated from plastic, roofing felt, or rubber, it is usually made of rust-resistant metal: galvanized steel, aluminum, or copper. Galvanized sheet metal is most common, but aluminum and copper find occasional use in specialty situations. Aluminum flashing is very popular for do-it-yourself installation because it's easy to bend. Copper flashing is usually custom fabricated for use with copper roofs. Flashing is formed and, in some cases, soldered into various shapes, depending upon the job it must do. The most common locations for roof flashing are at valleys, chimneys, roof penetrations, eaves, lakes, skylights, ridges, and at the intersections between the roof and wall.



Other Roofing Products

Rolled Roofing

 ITEM #
 DESCRIPTION

 652160
 90# MSR BLACK

 698043
 90# MSR BROWN

 697971
 90# MSR CEDAR

 697970
 90# MSR WEATHEREDWOOD

 652161
 90# MSR WHITE

 652444
 55# SMOOTH

 653111
 43# ORGANIC BASE

Shingle Starter

ITEM #	SIZE	DESCRIPTION		
214141	9"	STARTER ROLL		

Cedar Shakes & Shingles

TEM # SIZE	DESCRIPTION
219912 16"	FIVEX WRC SHINGLES
198860 1/2" X 24"	WRC #1 MEDIUM H/S SHAKES
198467 3/4" X 24"	WRC #1 HEAVY H/S SHAKES
200487 5/8" X 24"	WRC #1 TAPERSAWN SHAKE HIP & RIDGE

Info Corner:

Cedar Shim Shingles and Shakes

Shim is a type of shingle that's essential to any building project that requires material to be leveled or square. Often made of red western cedar, shims are durable and resistant to bug infestation. When should you go "shim shingle" over "shake?" Cedar shim shingles are easy to break and they support temperature and humidity variations. Natural oils protect against decay and insects. Ready to shake? You must be working on the exterior wall of a home and desire a distinct rustic look.



田田

10.00

日日 日日

10 10 10 10 10

Atlas Felt

Innovative and diverse

Atlas Roofing Corporation is an innovative, customer-oriented manufacturer of residential and commercial building materials. Offering a diverse line of products designed to meet every budget and architectural requirement, Atlas also guarantees solutions to common problems such as high wind damage, algae streaks, and hail damage. For the most extreme weather conditions, customers choose the Signature Platinum Shingle Series with StormMaster[®] LM, which resists cracking, splitting, warping, or shrinking in both hot and cold weather climates. A unique blend of SBS (styrene butiadiene styrene) in the asphalt shingle formula provides a weather-retardant formula while also enhancing flexibility, strength, and durability.

Atlas Felt

 ITEM #
 DESCRIPTION

 665323
 #15 PLAIN

 232010
 #15 ASTM D226

 665322
 #30 PLAIN

Generic Felt

Moisture protection

Roofing underlayment is an extremely important aspect of a roofing system, as it acts to prevent the ingress of moisture into the sheathing and roof structure. Roofing felt is the most commonly used form of roofing underlayment. Purchased in roll form, roofing felt is available in a selection of materials that adhere to a specific roofing shape. The advances made in technology and materials have given way to many new features displayed by roofing felt, apart from water proofing and moisture protection. For example, roofing felt can be purchased with a "breathable" feature, which combines the passing of moisture with ventilation in order to minimize condensation levels in roof spaces. Roofing felt is made of a fiberglass or polyester fleece that is saturated with bituminous impregnating agents, such as asphalt, tar, and bitumen. Sometimes additional minerals such as sand are added to provide protection against atmospheric conditions.

Generic Felt

 ITEM #
 DESCRIPTION

 112034
 #15 PLAIN FELT

 112045
 #30 PLAIN FELT

 104267
 18" SPLIT FELT

FelTex

High Performance Roofing Underlayment

Designed by System Components Corporation, Feltex is ideal for sloped roof applications including slate, asphalt, metal, and tile. Stronger and lighter than type 30 felt with five times more coverage, FelTex is produced with engineered fabric that improves surface grip. This underlayment boasts long UV resistance and will not warp, wrinkle, or crack. Take advatange of a 25-year limited warranty.

FelTex Data


Product Information						
Technical Specifications						
TENSILE STRENGTH ASTM D 146-04	MD 113 lbs/in. CD 100 lbs/in.					
TEAR RESISTANCE ASTM D 1922-00	MD > 3200 g CD > 3200 g					
RUPTURE RESISTANCE ASTM D 3462-02 (No. 12 Gauge Roofing Nails)	87 lbf.					
BEACH PUNCTURE ICC AC-08	PASS					
LONG TERM SAG ICC AC-08	PASS					
LIQUID WATER TRANSMISSION ASTM D 4869-02	PASS					
ULTRA VIOLET AGING ICC AC 207	PASS					
ACCELERATED AGING ICC AC 207	PASS					

Test data is based on average results and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications.

FelTex Specifications

Product Information					
Category	Size				
Roll Sizes	48" x 250' (1.22m X 76.20m)				
Weight	48" x 100' (1.22m X 30.48m)				
Pallet Sizes	36 rolls (48" x 250') & 72 rolls (48" x 100')				

Info Corner: Synthetic Felt

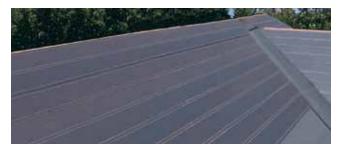

Synthetic underlayments are typically made from polypropylene, polyester, or fiberglass fabric, which weighs less than felt building paper, can be manufactured with an anti-slip surface and can withstand exposure to the elements for six months. Moisture resistance and strength make synthetic felt a natural choice for a secondary weather-resistant barrier to roof cladding. Installation is very similar to traditional felt, and proprietary fasteners may be required. Cost starts at approximately 30 percent more than traditional felt, but the amount of labor needed will usually remain the same or decrease.

Info Corner: Roofing Numerology

Numbers are essential to the most important structural component of your home – your roof. Three types of materials must be measured before embarking on any roofing project. Once you know these magic numbers, you'll also be able to project your cost and set your sights on the perfect outcome.

1) Shingles.

To estimate how many shingles you'll need:

- Estimate the total square footage of your roof's surface by first measuring the length and width of each plane on the roof, including dormers.
- Multiply the length by the width for each plane to get that plane's square footage.
- Calculate the roof's total square footage by adding the square footage of each of the planes together.
- Roof surfaces are measured in "squares," with each square referring to 100 square feet. To estimate the number of squares on a roof, divide the total square footage by 100. This number will give you the number of squares of shingles you will need to cover the roof.
- The most common type of shingle a three-tab or strip shingle – is generally packaged three bundles per square. Remember that for a new roof, you will also need the same amount of underlayment, which comes in rolls of four squares each. So, divide the number of squares on your roof by four to determine how many rolls of underlayment you will need.
- Always remember to add 10 percent to all of your material totals to allow for trim.



2) Slope.

Length and width can get disguised in the slope of your deck, but you must have this information to get an accurate estimate.


- Measure the vertical rise of your deck in inches over a 12" horizontal distance. If this rise is 4", then your roof slope is 4 in 12.
- Roof slopes are always expressed with the vertical rise mentioned first and the horizontal run (12") mentioned second.

3) Nails.

Small but mighty, nails are purchased by the pound so you'll need to ask your dealer for the correct amount of nails for your size of roof in the length you specify. In order to come up with this number:

- Count on using four nails per shingle. For regular three-tab shingles, this would require 320 nails per square. For highwind areas or when shingles are being applied to a mansard, six nails per shingles are required, or 480 nails per square.
- Note that other styles of shingles may require more or fewer nails per shingle; refer to the application instructions on your shingle wrappers for the correct nailing pattern.

LET BLUELINX BE YOUR WAREHOUSE

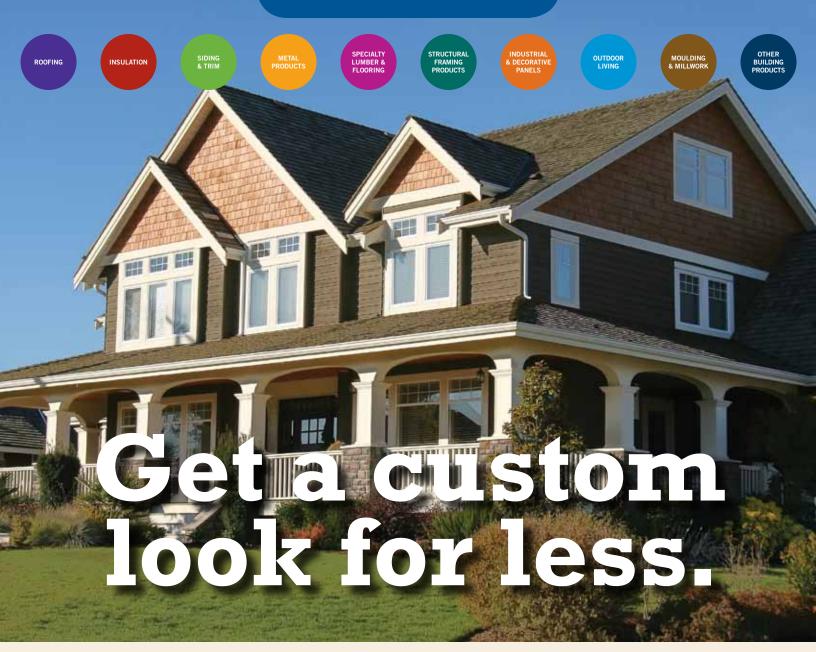

Get ahead of the Joneses.

Differentiate your homes without spending a fortune.

Set yourself apart from your competition with custom items.

Custom moulding, premium siding and trim, architectural columns, exclusive roofing accessories, striking decks and railings...and much more!



Sales: 888-502-BLUE • www.BlueLinxCo.com





<complex-block><complex-block>

Ordering from BlueLinx is that simple.

We've eliminated the confusing search for you by dividing our products into 10 categories. Get everything you need on one truck.

Call BlueLinx and get back to business!



Sales: 888-502-BLUE • www.BlueLinxCo.com

Insulation

Johns Manville Fiberglass Insulation CertainTeed Fiberglass Insultation Expanded Polystyrene Dow Insulation Dow Housewrap Thermo-ply®

INSULATION

A home's defense

Warmth and energy efficiency - the four types of insulation

Insulation can be made from a variety of materials, and is categorized in four types.



Rolls and batts or blankets: flexible products made from mineral fibers, such as fiberglass and rock wool. They are available in widths suited to standard spacings of wall studs and attic or floor joists: 2 x 4 walls can hold R-13 or R-15 batts; 2 x 6 walls can have R-19 or R-21 products.



Loose-fill insulation: made of fiber glass, rock wool, or cellulose in the form of loose fibers or fiber pellets; it should be blown into spaces using special pneumatic equipment. The blown-in material conforms readily to building cavities and attics. Therefore, loose-fill insulation is well suited for places where it is difficult to install other types of insulation.



Rigid foam insulation: typically more expensive than fiber insulation, but it's very effective in buildings with space limitations and where higher R-values are needed. Foam insulation R-values range from R-4 to R-6.5 per inch of thickness, which is up to two times greater than most other insulating materials of the same thickness.



Foam-in-place insulation: can be blown into walls and reduces air leakage if blown into cracks, such as around window and door frames.



The earth's choice for insulation

A well-insulated home or office helps limit energy consumption, which in turn reduces carbon dioxide pollution that is produced during the burning of coal, oil, and gas used to heat and cool homes. Reducing carbon dioxide emissions also helps control the Greenhouse Effect. For every Btu consumed in the manufacturing of fiberglass insulation, the building owner will save 12 Btu's annually

forever. In addition, fiberglass insulation often uses both pre-consumer and post-consumer recycled glass. Preconsumer is scrap left after the primary production process. Post-consumer recycled glass is primarily collected from curbside recycling programs. It is ground-up, cleaned, and re-melted. At this point, it is then combined with sand and other ingredients. By using recycled glass, manufacturers like CertainTeed use less energy and reduce manufacturing waste during the production process.

Info Corner: Earn LEED points with insulation

According to the Association of Homebuilders, the average home contains between 6,000 and 9,000 gallons of water during construction. Since mold can grow within 48 hours from the time of a water event, it's imperative that builders use superlative insulation materials and facings. Insulation is also a great opportunity to apply green elements to the home you're building.

Leadership in Energy & Environmental Design (LEED) is a U.S. Green Building Council program rating a building's environmental performance. LEED is a voluntary, consensusbased national standard for developing high-performance, sustainable buildings. Primarily concentrated on new construction and commercial buildings, LEED certification focuses on five categories: site planning, energy consumption, water usage, indoor environmental quality, and building materials.

Insulation touches all of these categories with the following point system:


- 1. Use of recycled-content building materials, 3 pts.
- 2. Use of materials manufactured from renewable sources, 2 pts.
- 3. Building envelope, 4 pts.
- 4. Proper installation of insulation including no gaps, voids or compression, 8 pts.

Visit www.nahbgreen.com to learn more.



U.S. D	U.S. Department of Energy R-Value Recommendations									
							Wall			
Zone	Gas	Heat	Fuel	Electric	Attic	Cathedral	Cavity	Insulation	Floor	
		Pump	Oil	Furnace		Ceiling		Sheathing		
1	1	1	1	1	R30 to R49	R22 to R38	R13 to R15	None	R13	
2	1	1	1		R30 to R60	R22 to R38	R13 to R15	None	R13	
2				1	R30 to R60	R22 to R38	R13 to R15	None	R19 - R25	
3	1	1	1		R30 to R60	R22 to R38	R13 to R15	None	R25	
3				1	R38 to R60	R22 to R38	R13 to R15	R2.5 to R5	R25	
4	1	1	1		R38 to R60	R30 to R38	R13 to R15	R2.5 to R6	R25 - R30	
4				1	R38 to R60	R30 to R38	R13 to R15	R5 to R6	R25 - R30	
5	1	1	1		R38 to R60	R30 to R38	R13 to R15	R2.5 to R6	R25 - R30	
5				1	R38 to R60	R30 to R60	R13 to R21	R5 to R6	R25 - R30	
6	1	1	1	1	R49 to R60	R30 to R60	R13 to R21	R5 to R6	R25 - R30	
7	1	1	1	1	R49 to R60	R30 to R60	R13 to R21	R5 to R6	R25 - R30	
8	1	1	1	1	R49 to R60	R30 to R60	R13 to R21	R5 to R6	R25 - R30	

* These recommendations are cost-effective levels of insulation based on the best available information on local fuel and materials costs and weather conditions. Consequently, the levels may differ from current local building codes.

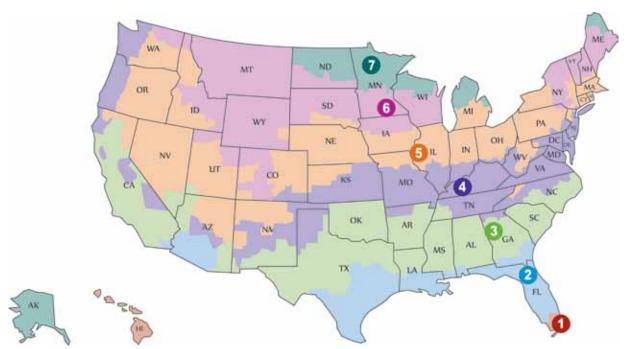

All of Alaska in Zone 7 except for the following boroughs in Zone 8:

Fairbanks N. Star

- Bethel
- Northwest Arctic

Southeast Fairbanks

- Dellingham
- Wade HamptonNome
- Yukon-Koyukuk

North Slope

North Slope


Zone 1 includes Hawaii

- Guam
- Puerto Rico
- Virgin Islands
- Information obtained from the U.S. Department of Energy. For more information, visit the DOE website at: www.energycodes.gov/states.

Johns Manville

Healthy, safer buildings

Johns Manville, a Berkshire Hathaway company, is a leading manufacturer and marketer of premium-quality building insulation, commercial roofing, roof insulation, and specialty products for commercial, industrial, and residential applications. JM's product offerings include: Formaldehyde-free[™] fiberglass building insulation, commercial roofing membranes and roof insulations, filtration media, and mats and reinforcements. Only Johns Manville offers a complete line of Formaldehyde-free[™] fiberglass building insulation, providing better indoor air quality, outstanding thermal and acoustical performance, and most important, healthy, safer buildings. It contains more certified post-consumer recycled glass than other fiberglass insulation and helps maximize LEED credits.

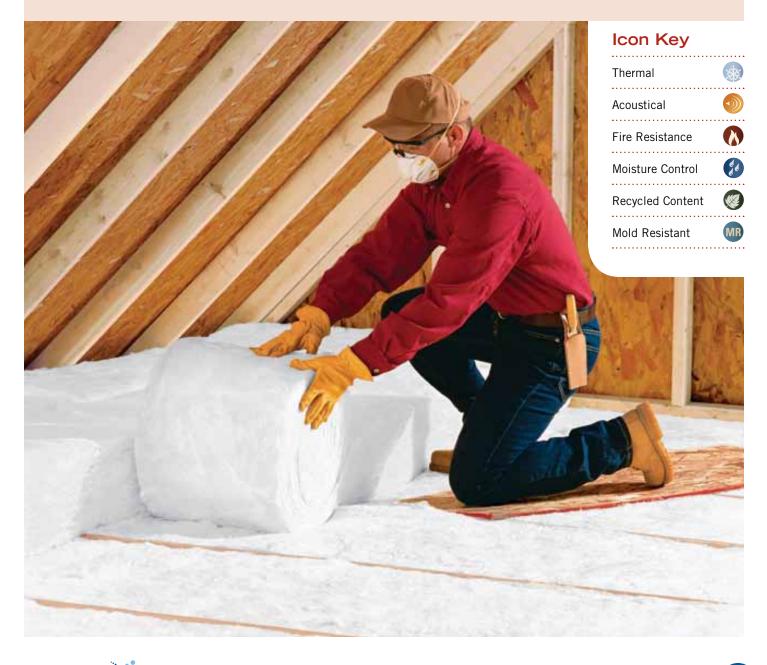

Fiberglass Building Insulation Products

IM FORMALDEHYDE-FREE™

Unfaced

Thermal & Sound Control Batts and Rolls





Light-density unfaced batts and rolls for installation within wall cavities, floors and attics. Available for standard

wood or metal framing. May be used with a separate vapor retarder when vapor control is required. Comes in R-values ranging from R-11 to R-38.

Recycled Content: 20% post consumer, 5% pre consumer



Technical Data R-VALUE THICKNESS WIDTH WOOD FRAMING 15" x 93," 23" x 93," R-11 3.50 15" x 105 15" x 93," 15" x 105" 3 50 R-13 15" x 93," 23" x 93," R-15 3.50 15" x 105" R-19 6.50" 15" x 93," 23" x 93," 15" x 105" 15" x 93," 23" x 93" 16" x 48," 24" x 48" 5.50" R-21 R-30 10.25 15.5" x 48," 23.625" x 48" 8.25' R-30c 13.00 16" x 48" R-38 15.5" x 48," 23.75" x 48" R-380 10.25 METAL FRAMING 16," 24" 16," 24" 16," 24" 16," 19," 24" R-11 3.625 R-13 3 50" R-19 6.50 10 25 R-30

Please check with your local sales representative for additional R-values and sizes.

ASTM Standard C665, Type I

- Surface Burning Characteristics (ASTM E84)
- Flame Spread 25 or less

36

- Smoke Developed Index 50 or less
- Critical Radiant Flux (ASTM E970) greater than 0.12 W/cm² (0.11 Btu/ft²·s)
- Water Vapor Sorption (ASTM C1104) less than 5% by weight

.

- Odor Emission (ASTM C1304): pass
- Corrosiveness (ASTM C665, 13.8): pass
- Fungi Resistance (ASTM C1338): pass

IM FORMALDEHYDE-FREE™

Kraft-Faced

Thermal & Sound Control Batts and Rolls





Light-density batts and rolls with kraft-facing vapor retarder for use in wall cavities. floors and attics. Available for

standard wood or steel framing. Comes in R-values ranging from R-11 to R-38.

Recycled

Content: 20% post consumer. 5% pre consumer

Technical Data				
R-VALUE THICKNESS WIDTH				
R-11 3.50" 11" x 93," 15" x 93," 23" x 93," 15" x 105"				
R-13* 3.50" 11" x 93," 11" x 105," 15" x 93,"				
23" x 93," 15" x 105"				
R-15 3.50" 15" x 93", 23" x 93," 15" x105"				
R-19* 6.50" 11" x 93," x 15" x 93," 19.25" x 48,"				
23" x 93," 15" x 105"				
R-21 5.50" 15" x 93," 23" x 93"				
R-30 10.25" 12" x 48," 16" x 48," 24" x 48"				
R-30c 8.25" 15.5" x 48," 23.625" x 48"				
R-38 13.00" 16" x 48," 24" x 48"				
R-38c 10.25" 15.5" x 48," 23.75" x 48"				
*Also available without stapling tabs.				
Please check with your local sales representative for				
additional R-values and sizes.				
 ASTM Standard C665 Kraft: Type II, Class C, Category 1 				
Kraft: unrated for Flame/Smoke				

- Water Vapor Permeance (ASTM E96)
- b Kraft: 1.0 Perms (57 ng/Pa·s·m²)
- Water Vapor Sorption (ASTM C1104) less than b 5% by weight
- Odor Emission (ASTM C1304): pass
- Corrosiveness (ASTM C665, 13.8): pass
- b Fungi Resistance (ASTM C1338): pass

IM FORMALDEHYDE-FREE™

Climate Pro[®]/ Attic Protector[®] Thermal & Sound Control

Blow-in Fiberglass





Blow-in Formaldehydefree[™] loose-fill fiberglass insulation is designed for attics. It is noncorrosive and noncombustible.

Climate Pro insulation is for professionals using large truck-mounted, high-volume production blowing wool machines and for the Blow-In-Blanket® System to fill walls, ceilings and irregular spaces. Attic Protector insulation is for the remodeling professional who uses a portable blowing machine.

Recycled Content: 20% post consumer, 5% pre consumer

Т	echnical Data					
R-	VALUE					
R-11 to R-60						
(se	ee package for sq. ft. coverage at each R-value)					
CI	imate Pro-Attics					
In	stallation in attics using a professional-grade blowing					
ma	achine					
CI	imate Pro-Enclosed Cavities					
BI	ow-In-Blanket System installation in walls, ceilings and					
flo	ors (see package for R-value and sq. ft. coverage at each					
са	vity thickness)					
	ASTM Standard C764, Type I, Category 1					
	Surface Burning Characteristics (ASTM E84)					
	Flame Spread 25 or less					
	Smoke Developed Index 50 or less					
	Loss On Ignition (ASTM C764, 12.3) 1% or less					
	Critical Radiant Flux (ASTM E970) 0.12 W/cm ²					
	(0.11 Btu/ft ² ·s) or greater					
	Combustion Characteristics (ASTM E136): pass					
	Water Vapor Sorption (ASTM C1104) less than					
	• • •					
	5% by weight					
)	5% by weight Odor Emission (ASTM C1304): pass					
	5% by weight					

Johns Manville Fiberglass Insulation

		<u> </u>	
ITEM #	R-VALUE	SIZE	DESCRIPTION
107395	R-11	15" X 70'6"	MANVILLE KRAFT ROLL B-232 88.12SF
102274	R-11	23" X 70'6"	MANVILLE KRAFT ROLL B-234 135.12SF
421960	R-11	15" X 93""	MANVILLE UNFACED BATTS U-1339 155.00SF
414578	R-13	15" X 93"	MANVILLE KRAFT BATTS K-1241 106.56SF
414579	R-13	15" X 93"	MANVILLE UNFACED BATTS U-1330 106.56SF
119588	R-19	15" X 39'2"	MANVILLE KRAFT ROLL B-240 48.96SF
157925	R-19	23" X 39'2"	MANVILLE KRAFT ROLLS B-242 75.07SF
103689	R-19	15" X 39'2"	MANVILLE UNFACE ROLLS B373 48.96SF
188911	R-19	23" X 39'2"	MANVILLE UNFACE ROLLS B374 75.07SF
604367	R-30	16" X 48"	MANVILLE KRAFT BATTS K-1242 58.66SF
414577	R-30	24" X 48"	MANVILLE KRAFT BATTS K-1243 88.00SF
525584	R-38	24" X 48"	MANVILLE KRAFT BATTS K-1245 64.00SF
717551	JOHNS MA	NVILLE CLIMA	TE PRO 25.5LB BAG BLOWING WOOL B780SW





CertainTeed

CertainTeed Fiberglass Insulation

Now GREENGUARD[®] Certified for superior indoor air quality performance, this insulation has been tested for emissions of formaldehyde, volatile organic compounds (VOCs), respirable particles, and other pollutants using stringent environmental chamber protocols. Testing takes place in dynamic environmental chambers designed to simulate product use in typical indoor environments. Environmental chamber operation and testing protocols follow scientific principles established by the U.S. Environmental Protection Agency (USEPA) and its Environmental Technology Verification Program (ETV), the American Society of Testing Materials (ASTM), the State of Washington (SOW), Germany's Federal Environmental Agency, and other applicable government or industry programs.

What's the difference?

Unfaced insulation is manufactured in increased widths to permit friction fit installation in wall cavities. This insulation is used with a separate vapor retarder, such as CertainTeed's MemBrain[™], The Smart Vapor Retarder, or where a vapor retarder is not required.

Kraft Faced insulation is manufactured with an integral vapor retarder. The kraft facing includes attachment flanges at the edges that are used for either face or inset stapling. The kraft facing, applied with asphalt to the fiber glass insulation, has a vapor transmission (permeance) rating of one perm or less.

Product Benefits

- Thermally efficient to help fight rising utility bills
- Lightweight and flexible for easy installation
- Good sound absorption; reduces noise level wherever applied
- Inorganic glass fiber is noncorrosive; it will not rot or mildew or otherwise deteriorate
- Does not absorb moisture
- Noncombustible per ASTM E 136 (unfaced only)
- GREENGUARD Certified

Compliances

CertainTeed building insulation complies with ASTM C 665 and other specifications. See manufacturer's literature for more details.

CertainTeed

CertainTeed Rolls & Batts

Unfaced Rolls

ITEM #	R-VALUE	SIZE	DESCRIPTION
717672	R11	15" X 84'6"	UNFACED ROLLS CT 900325
717454	R19	15" X 39'4"	UNFACED ROLLS CT 900665
717592	R19	23" X 39'3"	UNFACED ROLLS CT 900675

Kraft Rolls

ITEM #	R-VALUE	SIZE	DESCRIPTION
715835	R11	15" X 70'6"	KRAFT ROLLS PERF CT 900075
715834	R19	15" X 39'2"	KRAFT ROLLS PERF 94"CT 900105
715838	R19	23" X 39'3"	KRAFT ROLLS PERF 94"CT 900115

Unfaced Batts

ITEM # R-VALUE SIZE		SIZE	DESCRIPTION	
107603	R13	15-1/4" X 94"	UNFACED BATTS CT 911785	



Kraft Batts

ITEM #	R-VALUE	SIZE	DESCRIPTION
717452	R13	15" X 94"	KRAFT BATTS CT 901775



Dow

STYROFOAM SIS Brand Structural Insulated Sheathing

Dow has built its reputation on innovative building products that stem from the technical strength and superior insulting qualities of extruded foam used for residential, commercial, and industrial insulation. The innovative STYROFOAM SIS Brand Structural Insulated Sheathing from Dow combines three functions in one product: structural lateral bracing and transverse loads, significant insulation performance, and water-resistive barrier. A first-of-its-kind product, STYROFOAM SIS Brand Structural Insulated Sheathing is the result of research, development, and rigorous testing. The bottom line is that professional builders have used it with strong success.



STYROFOAM SIS

Product Description

For use as exterior sheathing. Combines wall bracing, transverse load resistance, insulation, and water-resistive barrier properties.


Building Compliance Code

Meets ASTM C1289 Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board. See ICC ES Code Evaluation Report ESR 2436.

ITEM #	SIZE	DESCRIPTION
722215	1/2" 4 X 8	STRUCTURAL INSULATION SHEATHING
722274	1/2" 4 X 9	STRUCTURAL INSULATION SHEATHING
734726	1/2" 4 x 10	STRUCTURAL INSULATION SHEATHING
733524	1" 4 X8	STRUCTURAL INSULATION SHEATHING
733565	1"4X9	STRUCTURAL INSULATION SHEATHING
733525	1" 4 X 10	STRUCTURAL INSULATION SHEATHING

Styrofoam Brand SIS				
Nominal Board Thickness	0.5	1		
R-value at 75° F	3.0	5.5		
Board Size (feet)	4 x 8, 4	4 x 9, 4 x 10		



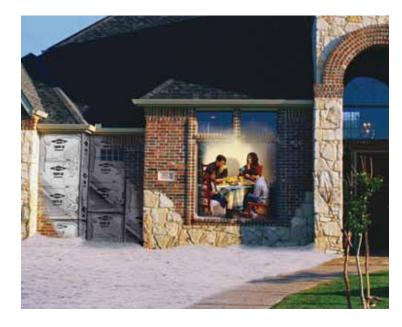

Brand Snapshot: STYROFOAM SIS

STYROFOAM SIS Brand Structural Insulated Sheathing has won an MVP Award for "Most Valuable Product 2009" from *Building Products* magazine. STYROFOAM SIS was selected as a winner of this coveted award by a panel of judges comprised of builders, remodelers, architects, and developers who evaluated product submissions based on their ability to reduce installation time, callbacks, or labor costs, and other factors that bring "value" to building professionals.

Dow Structural Insulated Sheathing (SIS) Benefits

- Eliminates thermal bridging through the studs, resulting in a more efficient and confortable home.
- Keeps temperature of wall cavity warmer, dramatically reducing the possibility of condensation and mold issues.
- Using SIS eliminates the OSB, which is a food source for mold.
- SIS decreases the building cycle time when used in place of OSB. Estimated half-day cycle reduction on the SIS test build. A half-day cycle time reduction can easily impact the bottom line by \$1,000 to \$2,000.
- Framers love installing SIS compared to OSB and HW. Less than half the weight of OSB.
- Builders can differentiate themselves from the competition when using SIS. Reduction in energy costs of \$200 to \$500 with a 2,200 square foot home. Reduction in total operating costs allow for more people being approved to purchase.
- Builders can increase their close percentage when using SIS. Dow will supply sales tools and sales training to support the differentiation efforts.
- SIS is a green product. It reduces energy costs and is made with 80% post-consumer recycled content.
- SIS is the right answer for the builder and the homeowner.

41

Polyisocyanurate Insulation



TUFF-R

Product Description

A high-performance polyisocyanurate foam core with radiant barrier-quality aluminum foil facers on both sides (one side reinforced).

Building Code Compliance

Complies with ASTM C1289 Type 1, Class 1. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES NER-616. Calif. Std. Reg. # CA T383. Florida Building Code FL 3839.

Product Specifications					
Nominal Board Thickness	0.5	0.75	1		
R-value at 75° F	3.3	5.0	6.5		
Board Size (feet)	4 x 8, 4 x 9, 4 x 10				

ITEM #	SIZE	DESCRIPTION
406069	3/4" X 48 X 96	DOW TUFF-R FOAM SHEATHING
159174	1/2" 48 X 96	DOW TUFF-R FOAM SHEATHING
108375	1" X 48 X 96	DOW TUFF-R FOAM SHEATHING



Super TUFF-R

Product Description


A high-performance polyisocyanurate foam core with three-ply poly/aluminum facers laminated to the core made via a patented process, resulting in durability. One facer is blue; the other facer is radiant barrier-quality reflective foil.

Building Code Compliance

Complies with ASTM C1289 Type 1, Class 1. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES NER-616. Calif. Std. Reg. # CA T383. Florida Building Code FL 3839.

Product Specifications					
Nominal Board Thickness	0.5	0.75	1.0		
R-value at 75° F	3.3	5.0	6.5		
Board Size (feet)	4 x 8, 4 x 9, 4 x 10				

ITEM #	SIZE	DESCRIPTION
628804	3/4" X 48 X 96	DOW SUPER TUFF-R FOAM SHEATHING
636164	1/2" X 48 X 96	DOW SUPER TUFF-R FOAM SHEATHING
414824	1/2" X 48 X 108	DOW SUPER TUFF-R FOAM SHEATHING
406071	1" X 48 X 96	DOW SUPER TUFF-R FOAM SHEATHING
417962	1" X 48 X 108	DOW SUPER TUFF-R FOAM SHEATHING



THERMAX White Finish

Product Description

A glass-fiber-reinforced polyisocyanurate foam core faced with nominal 1.25 mil embossed white acrylic-coated aluminum on one side and 0.9 mil smooth aluminum on the other. Can be installed exposed to the interior without a thermal barrier.

Building Code Compliance

Complies with ASTM C1289 Type I, Class 2. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES NER-681. FM 4880 - see Factory Mutual Approval Guide. Calif. Std. Reg. # CA T383. Florida Building Code FL 3839.

Product Specifications							
Nominal Board Thickness	0.5	0.75	1	1.25	1.55	2	
R-value at 75° F	3.3	5.0	6.5	8.1	10.1	13.0	
Board Size (feet)	4 x 8, 4	x 10					



THERMAX Sheathing

Product Description

A glass-fiber-reinforced polyisocyanurate foam core with solid aluminum foil facers on both sides. Can be installed exposed to the interior without a thermal barrier.

Building Code Compliance

Complies with ASTM C1289 Type I, Class 2. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES NER-681. FM 4880 - see Factory Mutual Approval Guide. NYC MEA # 335-06-M, Miami-Dade NOA 04-1021.02, 02-0703.02 and 02-0703.03. Calif. Std. Reg. # CA T383. Florida Building Code FL 3839.

Product Specifications						
Nominal Board Thickness	0.5	0.75	1	1.5	2	
R-value at 75° F	3.3	5.0	6.5	9.8	13.0	
Board Size (feet)	4 x 8, 4 x	9,4 x 10				







FROTH-PAK Foam Insulation Kit

Product Description

• Two-component, quick-cure spray polyurethane foams that fill studs, sill plates, and large cavities for insulation and air sealing. The full coverage spray foam insulation is available as a medium density foam.

Building Compliance Code

▶ FROTH-PAK Foam Insulation Kit meets code ASTM E84 requirements for foam plastic insulation at 2" thickness.

Cure Time

Actual cure time will depend on temperature. Tack-free < 1 min.

FROTH-PAK ^{™ (1)} Foam Insulation Kits					
Product ⁽²⁾	Theoretical Yield ⁽³⁾		Density, Ib/ft (3)	Aged	
	bd ft (m ³)	Reaction	(kg/m³)	R-Value (RSI) (4)	
FROTH-PAK™ Foam	200 (0.46)	Quick	1.75 (28)	5.35 (0.027)	
Insulation Kit 200					
FROTH-PAK™ Foam	620 (1.46)	Quick	1.75 (28)	5.35 (0.027)	
Insulation Kit 620			6		



FROTH-PAK Foam Sealant Kit

Product Description

• Two-component, quick-cure spray polyurethane foams that fill studs, sill plates, and large cavities for insulation and air sealing. The foam sealant kit is available in a selection of densities, properties, and performance ranges to meet different application requirements.

ECIA

Building Compliance Code

FROTH-PAK™ Foam Sealant Kit is classified as a sealant. Underwriters Laboratories Listed - foam sealant. See CCMC 13074-R.

Cure Time

Actual cure time will depend on temperature. Tack-free < 1 min.


FROTH-PAK ^{™ (1)} Foam Sealant Kits					
Product ⁽²⁾ Theoretical Yield ⁽³⁾			Density, Ib/ft (3)	Aged	
	bd ft (m ³)	Reaction	(kg/m ³)	R-Value (RSI) (4)	
FROTH-PAK™ 12	12 (0.03)	Quick	1.9 (30)	4.6 (0.81)	
FROTH-PAK™ 120	120 (0.28)	Quick	1.75 (28)	4.7 (0.83)	
FROTH-PAK™ 200	200 (0.46)	Quick	1.75 (28)	4.7 (0.83)	
FROTH-PAK™ 620	620 (1.46)	Quick	1.75 (28)	4.7 (0.83)	

(1) Underwriters Laboratories Listed - foam sealantnumber of foam spray passes, the specific nozzle used, etc.

(2) Larger sizes, including refillable systems, are also available.

(3) Actual yield will depend on various factors of the application and the environment, including temperature, foam thickness, number of foam spray passes, the specific nozzle used, etc.

(4) R means resistance to heat flow. The higher the R-value or RSI, the greater the insulating power. Aged R-value (RSI) measured at 90 days, 140°F (60°C), 50% R.H.

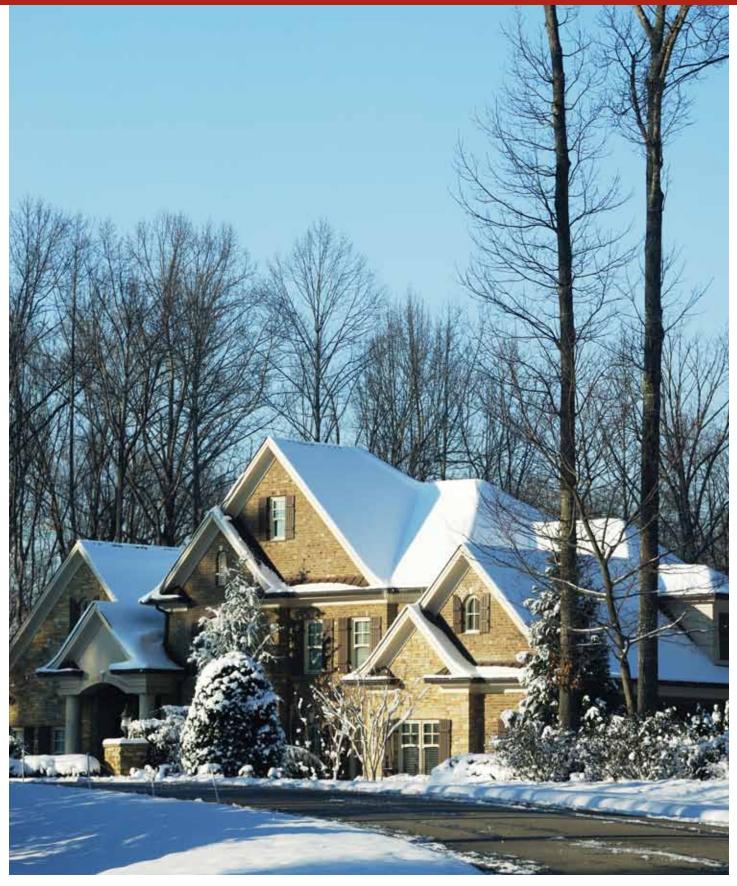



Dow Rigid Foam Insulation

46

Dow's portfolio of rigid foam insulation products includes STYROFOAM Brand extruded polystyrene foam and Dow polyisocyanurate insulation. Proprietary manufacturing processes produce boards with uniform, closed-cell structures and high, stable R-values. STYROFOAM Brand insulation products offer the highest moisture resistance of any foam plastic insulation available in the industry today. The reusable boards feature high compressive strength but are also lightweight and easy to cut to size. Dow polyisocyanurate insulation products feature insulation cores of thermoset foam plastic laminated to a variety of facers that enhance strength, moisture resistance, and rigidity.

Extruded Polystyrene Foam Insulation

STYROFOAM Brand DURAMATE Plus

Product Description

An extruded polystyrene foam board with proprietary extra-tough plastic film on both sides. Recommended for wall sheathing in residential applications. Very tough, durable performance reduces damage on the job site.

Building Code Compliance

Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified, see Classification Certificate D369. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

Product Specifications				
Nominal Board Thickness	.55			
R-value at 75° F	3.0			
Board Size (feet)	4 x 8, 4 x	9		

ITEM #	SIZE	DESCRIPTION
576081	.55" X 48 X 96	R3 DOW STYROFOAM DURAMATE "PLUS" FOAM SHTG SE
576082	.55" X 48 X 108	R3 DOW STYROFOAM DURAMATE "PLUS" FOAM SHTG SE



STYROFOAM Brand SCOREBOARD

Product Description

An extruded polystyrene foam insulation board with square edges on all four sides. Scored longitudinally on 16" and 24" centers, making it easy to snap into convenient widths.

.

Building Code Compliance

Complies with ASTM C578 Type IV. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified, see Classification Certificate D369. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

Product Specifications						
Nominal Board Thickness	0.75	1	1.5	2	2.5	3
R-value at 75° F	3.8	5.0	7.5	10.0	12.5	15.0
Board Size (feet)	4 x 8					

ITEM #	SIZE	DESCRIPTION
124061	1" X 48 X 96	DOW STYROFOAM SCOREBOARD FOAM SHEATHING
146601	1-1/2" X 48 X 96	DOW STYROFOAM SCOREBOARD FOAM SHEATHING
133909	2" X 48 X 96	DOW STYROFOAM SCOREBOARD FOAM SHEATHING
673348	1" X 48 X 96	DOW UTILITYFIT SCOREBOARD SHEATHING
673358	1" X 48 X 96	DOW UTILITYFIT FOAM SHEATHING T&G
673350	1-1/2" X 48 X 96	DOW UTILITYFIT SCOREBOARD SHEATHING
673349	2" X 48 X 96	DOW UTILITYFIT SCOREBOARD SHEATHING





STYROFOAM Brand Residential Sheathing

Product Description

An extruded polystyrene foam insulation board with plastic film on both sides. Recommended for wall sheathing in residential applications. Plastic film reduces job site damage.

Building Code Compliance

Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified see Classification Certificate D369. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

Product Specifications					
Nominal Board Thickness	0.55	0.75	1		
R-value at 75° F	3.0	4.0	5.0		
Board Size (feet)	4 x 8, 4 x	9,4 x 10			

ITEM #	SIZE	DESCRIPTION
201549	.55" X 48 X 96	R3 DOW STYROFOAM RS FOAM SHEATHING SE
202060	.55" X 48 X 108	R3 DOW STYROFOAM RS FOAM SHEATHING SE
126749	2" X 24 X 96	DOW STYROFOAM SM FOAM SHEATHING (NON-RS)



STYROFOAM Brand Tongue & Groove

Product Description

An extruded polystyrene foam insulation board with tongue and groove edges on all four sides of 2' x 8' boards, 1" thick or less and on the long edges on all boards.

Building Code Compliance

Complies with ASTM C578 Type IV. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified, see Classification Certificate D369. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

Product Specifications						
Nominal Board Thickness	0.75	1	1.5	2		
R-value at 75° F	3.8	5.0	7.5	10.0		
Board Size (feet)	2 x 8, 4 x	8, 4 x 9				

ITEM #	SIZE	DESCRIPTION
202059	.75" X 48 X 96	R4 DOW STYROFOAM RS FOAM SHEATHING T&G
202631	1" X 48 X 96	R5 DOW STYROFOAM RS FOAM SHEATHING T&G
165084	3/4" X 48 X 96	DOW STYROFOAM WIDE FOAM SHEATHING T&G
163428	1" X 48 X 96	DOW STYROFOAM WIDE FOAM SHEATHING T&G
169640	1" X 48 X 108	DOW STYROFOAM WIDE FOAM SHEATHING T&G
200713	1-1/2" X 48 X 96	DOW STYROFOAM WIDE FOAM SHEATHING T&G
201614	2" X 48 X 96	DOW STYROFOAM WIDE FOAM SHEATHING T&G



STYROFOAM Brand WALLMATE

Product Description


An extruded polystyrene foam board with rabbet edges on long edges. Designed as a quick, easy option for insulating and finishing the interior of basement walls. When boards are butted together, the rabbet edges form a slot between boards that accommodates a wood mailing strip. The wood nailing strip attaches the boards to the wall and provides a nail base for drywall.

Building Code Compliance

Complies with ASTM C578 Type X. Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified, see Classification Certificate D369. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

Product Specifications					
Nominal Board Thickness*	1.5"	2"			
R-value at 75° F	7.5	10.0			
Board Size (feet)	2 x 8				

ITEM # SIZE		DESCRIPTION		
414423	1-1/2" X 24 X 96	DOW STYROFOAM WALLMATE BOARD		



BLUECOR

Product Description

An extruded polystyrene foam insulation board with plastic film on both sides. In residing applications, recommended as underlayment layer to provide solid, level surface under the new siding. Fanfolded 50-foot lengths make it easy to install and work with on the job site. The high-grade polystyrene formulation coupled with the heat bonding of capsheets (no glue used) permits 90° "folding" around corners without breakage or the need for reinforcement tape.

Building Code Compliance

Meets IBC/IRC requirements for foam plastic insulation. See ICC-ES ESR-2142. UL Classified, see Classification Certificate U589. Calif. Std. Reg. # CA T064. Florida Building Code FL 3835.

roduct S	Specifications		- Ann	21h
Nominal E	Board Thickness*	0.25		Proban were
R-value at	: 75° F	1.0	- 14	
Board Size	e (feet)	4 x 50		
ГЕМ #	SIZE	DE	SCRIPTION	
69153	1/4" X 48 X 60	DC	W PROTECTION BOARD	FANFOLD
			- Name and Address of the Owner of the Own	



GO TO PAGE 62 FOR /Inyl siding product information

Dow Housewrap

Reduce costly air infiltration. Minimize moisture intrusion.

As part of an integrated approach to weatherization and improving a building's energy efficiency, housewraps from Dow provide a protective continuous membrane to cover cracks and gaps between exterior sheathing and seams of rigid foam insulation. Dow's WEATHERMATE Housewrap is a woven, perforated, polyolefin-based housewrap that is both tough and tear resistant. It offers an effective option for builders who prefer to use non-insulating sheathing along with housewrap. WEATHERMATE Housewrap is translucent to allow a clear view of the studs and the sheathing surface during installation and can be left uncovered for up to 60 days. For more exceptional tear resistance and durability, WEATHERMATE Plus Housewrap can be left uncovered for up to 120 days in the United States (60 days in Canada).



WEATHERMATE Housewrap

Product Description

Woven, perforated, polyolefin-based housewrap that is both tough and tear-resistant. Offers an effective option for builders who prefer to use housewrap as a secondary weather-resistive barrier. It is translucent to allow clear view of studs and sheathing surface. Can remain uncovered for up to 60 days.

Building Code Compliance

Meets IBC/IRC requirement for a water-resistive barrier. See ICC-ES NER-593 and ICBO-ES ER-5765.

Product Specifications								
Sold in Rolls 10' X 150' 9' X 100' 9' X 150' 9' X 195' 4'6" X 150' 3' X 100'							3' X 100'	
ITEM # SIZE DESCRIPTION								
652496 108" X 150' DOW STYROFOAM WEATHERMATE BUILDING WRAP								



WEATHERMATE Plus Housewrap

Product Description

A non-woven, non-perforated, polyolefin-based housewrap. Offers an effective option for builders who prefer to use housewrap as a secondary weather-resistive barrier. It is translucent to allow clear view of application surface. Superior tear resistance and outstanding durability compared to other leading non-woven, non-perforated wraps. Can remain uncovered for up to 120 days.

Building Code Compliance

Meets IBC/IRC requirements for a secondary water-resistive barrier. See ICC-ES NER-640 and ICBO-ES ER-5937.

Product Specifications							
Sold in Rolls 10' X 100' 10' X 150' 9' X 100' 9' X 150' 3' X 100' 3' X 10'							3' X 165'
ITEM #	SIZE	DE	SCRIPTION				
ITEM # 661563	SIZE 108" 2		SCRIPTION W STYROFOAM	WEATHERMA	ATE PLUS BU	ILDING WRAP)



STYROFOAM Sill Seal Foam Gasket

Product Description

A flexible polyethylene foam gasketing strip used to reduce air infiltration between concrete foundation and sill plate or around windows.

Building Code Compliance

Not applicable.

Product Specifications					
Sold in Rolls*	3-1/2" x 50'	5-1/2" x 50'	7 1/2" x 50'		

ITEM #	SIZE	DESCRIPTION
108942	1/4" X 3-1/2" X 50'	DOW SILL SEAL (8 ROLL/PACK)
108957	1/4" X 5-1/2" X 50'	DOW SILL SEAL (5 ROLLS/PACK)
111599	1/4" X 7-1/2" X 50'	DOW SILL SEAL (4 ROLLS/PACK)

GO TO PAGE 282 For more on Energy efficiency



WEATHERMATE Construction Tape

Product Description

Strong, pliable, highly adhesive tape seals, joints and seams of WEATHERMATE and WEATHERMATE Plus housewraps and STYROFOAM brand insulated sheathings. Oriented polypropylene backing formulated with UV-treated film helps resist degradation from exposure to sunlight.

Building Code Compliance

Complies with ASTM D3330 and ASTM D882.

Product	Specific	cations	
Sold in R	Rolls*	1-7/8" X 16	5' 2-7/8" X
EM #	SIZE		DESCRIF
78	2-7/8"	X 165'	DOW ALI



52

LET BLUELINX BE YOUR WAREHOUSE

OUTDOOF

UILDIN



Your truck is on the way.

Bluelinx

Avoid the inventory squeeze.

You don't want to run out of stock. But order too much, and you end up paying a fortune to store, handle and insure excess inventory.

Rely on just-in-time inventory from BlueLinx to save you money.



Sales: 888-502-BLUE • www.BlueLinxCo.com

LET BLUELINX BE YOUR WAREHOUSE



Get down to e-business!

Focus on your customers, not transactions.

Easy, effective and efficient. Conducting e-business improves business productivity by linking to customers or vendors and exchanging data.

How do you avoid wasting time? Simple. Call BlueLinx!

E-business, the buying and/or selling of goods via electronic means, is easy, effective and efficient. Conducting e-business improves business processes and productivity by linking to trading partners (customers or vendors) and exchanging data.

BlueLinx Corporation currently has applications to process the following electronic transactions for our customers and vendors:

- Purchase orders
 (inbound and outbound)
- Advanced Shipping Notice
- Payment (inbound)
- Invoices (inbound and outbound)
- Purchase order/confirmation

How is e-business a win-win for both BlueLinx Corporation and its trading partners? Improved productivity. Reduced paperwork. Improved inventory control and management. Improved ability to forecast customer demand. Improved manufacturing efficiency. Improved customer services. Increased competitiveness. Improved data accuracy and integrity. Reduced cost.

Net result, BlueLinx Corporation can exchange information with customers and vendors in minutes instead of days. It offers BlueLinx Corporation and its trading partners a new, more profitable way of doing business.

Ready to get down to e-business? Contact us at BlueLinx_EDI@BlueLinxco.com.

Sales: 888-502-BLUE • www.BlueLinxCo.com





Siding & Trim

Nichiha Pre-Finished Fiber Cement Siding Nichiha Primed Fiber Cement Siding Plycem Reversible Fiber Cement Trim GP Vinyl Siding GP Vinyl Soffit & Accessories Richwood Mounting Blocks & Vents Richwood Shutters Ply Gem Stone

Visual splendor in siding Nichiha

Better technology, better products

Nichiha has taken the mission of architects, designers, and specifiers—to work "faster, cheaper and better"— and provided beautiful, long-lasting fiber cement products that not only meet but exceed requirements. NichiProducts™ differ in several ways than other fiber cement products in the market today. Beginning with the raw materials, NichiProducts consist of over 50 percent post-industrial byproduct and recycled materials. NichiProducts contain over 50 percent fly ash, a post-industrial waste material generated at coal-burning, electric generating facilities; and by doing so, Nichiha annually diverts over 66,000 tons of fly ash from ending up in landfills. When you choose Nichiha, you choose the freedom of having options. For example, Premium Shake cement boards are available primed, in eight factory-stained colors, or pre-painted.


NichiBoard[™] | Sierra Premium[™] Shake Plus | NichiPanel[™] | NichiSoffit[™]

Nichiha Fiber Cement

Nichiha's superior technology produces fiber cement siding products that have better product characteristics. A lifetime warranty...more durable, stronger, easier to handle and install, and more authentic texture with cleaner, crisper edges. NichiProducts™ are simply better.

Just the facts:

- NichiProducts have a deeper, more authentic texture. During the manufacturing process Nichiha applies the cedar texture with heat and over 1 million pounds of pressure, unlike some competitive products where the texture is rolled on.¹
- NichiProducts have crisper, cleaner edges. NichiProducts are cured (dried) during two high-heat processes, assuring that the boards are hardened and strengthened to exacting standards. Many fiber cement products are cut wet, giving an edge that is soft and yielding.¹
- NichiProducts have a zero smoke and flame spread on surface burning. The boards are classified as noncombustible.¹
- NichiProducts are backed by a lifetime limited warranty*. The boards will not crack, rot or delaminate; are resistant to fungus and termite infestation and withstand extreme weather conditions.¹

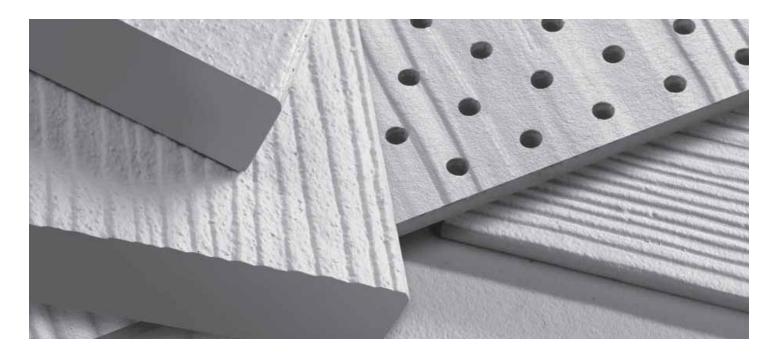



Better Technology for Green Building

Recycled Materials Impact

- NichiProducts differ in several ways than other fiber cement products in the market today. Beginning with the raw materials, NichiProducts consist of over 50% recycled materials.1
- NichiProducts contain fly ash, a recycled content generated at coalburning, electric generating facilities; and by doing so, Nichiha annually diverts thousands of tons of fly ash from ending up in landfills.
- Using fly ash also improves a product's performance characteristics; allowing for a stronger more durable exterior cladding that is easier to handle and install.1
- Pulp is also a material used in the composition of NichiProducts. Nichiha uses 3,000 tons annually of postconsumer newspaper waste that would normally end up in landfills.¹
- The Nichiha manufacturing facility in Macon, GA, includes an on-site water treatment plant. This facility not only recycles 95% of the water used in the manufacturing process, it treats the 5% water discharged back into the system.
- Using local material resources (90% of our materials are less than 200 miles from our facility), reduces the environmental impact and carbon emissions of long-haul transportation.1

¹ Exceptions – NichiTrim[™] Sierra Premium

Pre-Finished Siding – In Stock

2 coat/25 year Pre-Finished Warranty

NichiBoard Pre-Finished Cedar Lap Siding

Available sizes: 5/16" X 7-1/4" X 12' and 5/16" X 8-1/4" X 12' COLOR ITEM # (7-1/4") ITEM # (8-1/4") HARVEST BROWN 108909 121418 RIVERSTONE 108929 121493 121531 108936 WHEATGRASS DESERT CAMEL 108951 122274 GRANITE 109029 121873 FAIRWAY 109044 122249 122394 SNOW CAP 109058 SANDY BEACH 121688 109065 PFARI 109070 121621 STANDARD COLORS DESERT CAMEL FAIRWAY GREEN GRANITE HARVEST BROWN PEARL RIVERSTONE WHEATGRASS SANDY BEACH SNOW CAP WHITE *Colors shown may vary from actual material. Request color samples for true representation.



NichiBoard

The traditional beauty and character of smooth and cedar textured lap siding is as popular today as it was in earlier times. The choice of smooth or subtle cedar wood grain texture and the variety of lap widths makes NichiBoard the ideal choice for low-maintenance, high-profile curb appeal. Available in six widths and twelve foot length boards, NichiBoard is easy to handle and install. **All products listed below are available pre-finished (2- to 3-week lead time).**

NichiBoard Primed Lap Siding

ITEM #	DESCRIPTION	ITEM #	DESCRIPTION
102068	5-1/4" CEDAR	102263	5-1/4" SMOOTH
102134	6-1/4" CEDAR	102302	6-1/4" SMOOTH
102160	7-1/4" CEDAR	102331	7-1/4" SMOOTH
102178	8-1/4" CEDAR	102346	8-1/4" SMOOTH
102203	9-1/4" CEDAR	102375	9-1/4" SMOOTH





CEDAR

NichiBoard Product Specifications					
Profile	5-1/4"	6-1/4"	7-1/4"	8-1/4"	9-1/4"
Width (in.)	5-1/4	6-1/4	7-1/4	8-1/4	9-1/4
Length (ft.)	12	12	12	12	12
Thickness (nom in.)	5/16	5/16	5/16	5/16	5/16
Weight (Ibs. per panel)	12.1	14.5	16.8	19	21.4
Weight (Ibs. per sq. ft)	2.2	2.2	2.2	2.2	2.2
Coverage (sq. ft. per panel)	5-1/4	6-1/4	7-1/4	8-1/4	9-1/4
Exposed Coverage (sq. ft. per panel)	4	5	6	7	8
Packaging (pieces per pallet)	360	308	252	230	210

58

NichiSoffit

Great appearance and low maintenance - fulfilling the needs that today's home owners want and builders demand, NichiSoffit panels fit the requirements perfectly. Available smooth or in cedar texture and in vented and non-vented styles, NichiSoffit panels are factory primed and sealed, assuring a long-lasting, attractive appearance.

NichiSoffit Primed Soffit

ITEM #	DESCRIPTION	SIZE
102588	CEDAR NON-VENTED	1/4" X 12" X 12'
102654	CEDAR NON-VENTED	1/4" X 48" X 8'
102691	CEDAR VENTED	1/4" X 12" X 12'
102822	SMOOTH NON-VENTED	1/4" X 12" X 12'
102860	SMOOTH NON-VENTED	1/4" X 48" X 8'
102883	SMOOTH VENTED	1/4" X 12" X 12'

NichiSoffit Product Specifications				
Profile	Non-\	lented	Vented	
Width (in.)	12	48	12	
Lengths (ft.)	12	8	12	
Thickness (in.)	1/4	1/4	1/4	
Weight (Ibs. per panel)	22.2	59.2	22.2	
Weight (Ibs. per sq. ft.)	1.8	1.8	1.8	
Packaging (panels per pallet)	180	60	180	





NON-VENTED CEDAR

	• • •	
	VENTED CEDAR	
1		

NON-VENTED SMOOTH

VENTED SMOOTH

.

NichiPanel

NichiPanel siding is designed for vertical wall applications; full wall exteriors and the popular board and batten style can be achieved with NichiPanel. The 5/16" panels offer builders and home owners greater design flexibility while still getting the value of long-lasting and low-maintenance fiber cement siding.



SMOOTH STUCCO

> 4 10 5/16 2.2 92.5 40 40

GROOVED 8" OC.C CEDAR

S	NichiPanel Product Specifications		
	Height (ft.)	4	
	Length (ft.)	8	
	Thickness (nominal in.)	5/16	
	Weight (Ibs. per sq. ft.)	2.2	
	Weight (Ibs. per panel)	74	
	Coverage (sq. ft. per panel)	32	
	Packaging (panels per pallet)	50	

NichiPanel Primed Panels

ITEM #	DESCRIPTION	SIZE
102490	CEDAR	8'
102562	SMOOTH	8'
101739	STUCCO	8'
101914	8" OC GROOVED	8'
102456	CEDAR	10'
102513	SMOOTH	10'
101782	STUCCO	10'

59

Plycem Fiber Cement Trim

Reversible and smooth surface

Plycem Exterior Trim complements any siding product used today. Machined square edges ensure the clean look and smooth finish of high-end construction. Plycem Exterior Trim is ideally suited for a variety of applications, including exterior corners, windows, columns and doors, adding grace and elegance to any style architecture. Plycem Exterior Trim withstands damage from impact and is termite resistant. Temperature-controlled curing and drying adheres the refined fibers and cement into tight layers that will endure years of weather exposure. Made from an amalgamation of non-aggressive materials that safeguard human health and the environment, Plycem's manufacturing process employs principles of conservation that meet international environmental standards such as ISO 14001.

ITEM #	SIZE	DESCRIPTION
717060	4/4 - 4"X12'	REVERSIBLE PLYCEM TRIM 4 PCS BD
717060	5/4 - 4"X12'	REVERSIBLE PLYCEM TRIM 4 PCS PER BDL
717060	4/4 - 6"X12'	REVERSIBLE PLYCEM TRIM 4 PCS BD
717060	5/4 - 6"X12'	REVERSIBLE PLYCEM TRIM 4 PCS PER BDL
717060	4/4 - 8"X12'	REVERSIBLE PLYCEM TRIM 4 PCS PER BDL
717060	5/4 - 8"X12'	REVERSIBLE PLYCEM TRIM
717060	5/4 - 12"X12'	REVERSIBLE PLYCEM TRIM
717060	4/4 - 12"X12'	REVERSIBLE PLYCEM TRIM


Plycem Trim Specifications

	2" (1-3/4")	3" (2-1/2")	4" (3-1/2")	6" (5-1/2")	8" (7-1/4")	10" (9-1/4")	12" (11-1/4")"
Size (Thickness) 4/4 (3/4")	\checkmark						
Size (Thickness) 5/4 (1")	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark

* Pre-finished available

Only available in 12 ft. lengths



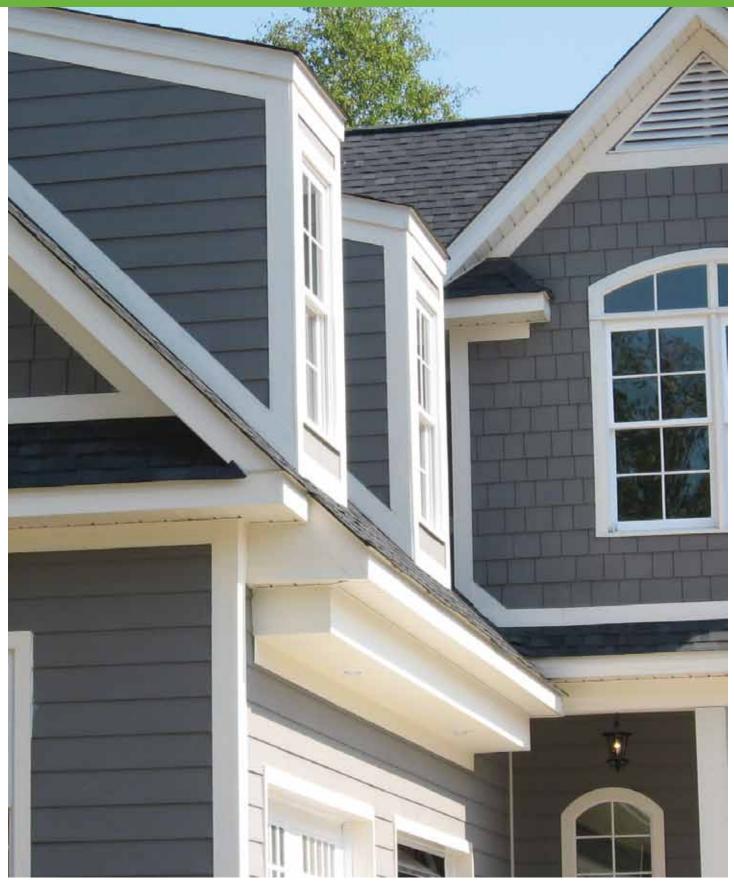

Vinyl Siding

A popular choice

Vinyl siding has become one of the most popular choice for new siding because it's economical and fairly durable, and requires very little maintenance. Vinyl won't split, peel or rot, and it comes in a wide variety of colors and widths, making it adaptable to many different visual styles. While a few companies do offer limited recycled vinyl products, vinyl siding is generally considered to be a non-recyclable material.

Vinyl Siding

Carefree beauty for your home

Whether you're building a dream home or renovating one you've loved for years, there's one solution for your home's exterior that will make it as beautiful, durable, and carefree as possible: vinyl siding. Look to Georgia-Pacific brand Vinyl Siding for a complete line of vinyl siding with the colors, profiles, thicknesses, and finishes that suit your home and budget.

- Never paint or stain again!
- Impervious to termites
- Durable, economical, and virtually maintenance-free for lasting value
- Coordinating line of vinyl accessories and trim
- Backed by a Limited Lifetime Transferable Warranty* * For complete warranty details call 1-888-502-BLUE

Georgia-Pacific Vinyl Siding by Ply Gem can help you meet your sustainable building goals and earn points in leading green building certification programs. Our programs offer features that positively contribute to sustainable building practices, improved energy



efficiency or lifecycle benefits of homes. All are important aspects of sustainable building and reflect Georgia-Pacific's contribution to the Ply Gem Enviro initiative.

For more information about LEED/NAHB points see the "Georgia-Pacific Vinyl Siding and Accessories Enviro" White Paper.





GEORGIA-PACIFIC HAS BEEN GREEN APPROVED BY THE NAHB RESEARCH CENTER.

This means you can be assured that Georgia-Pacific complies with specific greenpractice criteria in the *National Green Building Standard*. Visit www.GreenApprovedProducts.com for more details.

62

Seasons – High Performance Insulated Siding

Year-round performance

Maximize the value of your home with state-of-the-art Seasons High Performance Insulated Siding. Our premium quality, insulated siding offers the elegant look of natural wood without maintenance hassles.

- Adds a layer of insulation and increases the R-Value of exterior walls by up to 26%*
- Sturdy polystyrene backing and rigid paneling provides shock-absorbing dent resistance
- Reduces heating and cooling costs while reducing external noises



108 Double 6" Traditional

12' 6" panel • 98.64 lbs. per carton • 8 pieces per carton / 1 square 1' 1/8" overall thickness

Installation Components



300 Window & Door Surround Colors: See Standard Swatches Above 12' 6" panel 41.48 lbs. per carton • 10 pieces per carton



352 Outside Corner Post

Colors: See Standard and Premium Color Swatches Above 12' 0" length 53.88 lbs. per carton • 10 pieces per cartons



359 Inside Corner Post

Colors: See Standard and Premium Color Swatches Above 12' 0" panel 27.54 lbs. per carton • 10 pieces per carton



360 1-1/4" J-Channel

Colors: See Standard and Premium Color Swatches Above 12' 6" length 60.90 lbs. per carton • 40 pieces per carton



505 Starter Strip

Colors: N/A 12' 6" length 42 lbs. per carton • 24 pieces per carton 409 New Crown Backplate Color: White 12' 6" length 60.90 lbs. per carton • 24 pieces per carton



VISIT BlueLinx

•

369 3-1/2["] **Transition Mold Colors:** See Standard Swatches Above 12' 6" length 42 lbs. per carton • 10 pieces per carton ALMOND CLAY
CREAM FLINT
CREAM FLINT
GRAY MIST
PEARL TAN
THISTLE WHITE

STANDARD COLORS

PREMIUM COLORS



DARK COLOR



Colors shown may vary from actual material. Request color samples for true representation.

* Seasons provides up to an added insulation value of R2.87 if installed properly.

Cedar Lane Select

Natural look of stained wood

When you want the richness and character of natural, stained wood siding without the maintenance hassles, there's no reason to compromise. All you need is the quality and performance of Cedar Lane Select Premium Vinyl Siding.

- ▶ Snap-Tight[™] interlocking system
- Color-through technology minimizes the appearance of scratches
- Matching installation components and complementary accessories, soffit, and trim are available
- Backed by a Limited Lifetime Transferable Warranty
- Curl-over nail hem helps resist wind loads up to 190 mph

STANDARD COLORS

CHERRY	CHESTNUT
IRONWOOD	MAPLE
MESQUITE	OAK

SYCAMORE

64

*Colors shown may vary from actual material. Request color samples for true representation.



161 Double 4" Standard Lap

Variegated Wood Grain Finish 12'6" length / Thickness .046" (+.002,-.001) • 113.75 lbs. per carton • 24 pieces per carton / 2 squares • 36 squares per crate



162 Double 5" Standard Lap

Variegated Wood Grain Finish 12'0" length / Thickness .046" (+.002,-.001) • 110.31 lbs. per carton • 20 pieces per carton / 2 squares • 32 squares per crate



163 Double 4.5" Dutch Lap

Variegated Wood Grain Finish 12'1" length / Thickness .046" (+.002,-.001) • 105.66 lbs. per carton • 22 pieces per carton / 2 squares • 38 squares per crate



164 Double 5" Vertical Soffit

Variegated Wood Grain Finish 12'0" length / Thickness .046" (+.002,-.001) • 100.45 lbs. per carton • 20 pieces per carton / 2 squares • 34 squares per crate



165 Double 5" Perforated Soffit

Variegated Wood Grain Finish 12'0" length / Thickness .046" (+.002,-.001) • 94.68 lbs. per carton 20 pieces per carton / 2 squares • 34 squares per crate

Installation Components



400 4" x 3/4" Outside Corner Post Matching Variegated Finish

10'0" length • 47.90 lbs. per carton 10 pieces per carton / 100 feet • 12 cartons per crate



401 3/4" Inside Corner Post

Matching Variegated Finish 10'0" length • 21.59 lbs. per carton 10 pieces per carton / 100 feet • 30 cartons per crate



402 5/8" Extended J-Channel

Matching Variegated Finish 12'6" length • 52 lbs. per carton 0 pieces per carton / 500 feet • 27 cartons per crate



403 Undersill Trim

Matching Variegated Finish 12'6" length • 46.99 lbs. per carton 40 pieces per carton / 500 feet • 70 cartons per crate

Heritage Hill Vinyl Siding

Traditional beauty in rich, classic colors

Color. It's one of the most important choices you'll ever make about your home's exterior: color evokes your home's personality. The color you select will have an impact on the perception of a home's size and architectural detail. With 18 colors, including Natural Traditions[®] palette of dark, rich colors, Heritage Hill vinyl siding has a color that's right for most every home.

- Finely embossed, authentic wood grain texture and ultra low-gloss finish
- 18 colors including Natural Traditions collection of darker, richer colors
- Durable .044" thickness
- Natural Traditions collection of colors is also backed by a 25-year Excessive Color Fade Warranty
- Luran®S ASA resin used for Natural Traditions collection adds extra UV protection
- Full roll-over nail hem helps resist wind loads up to 215 mph



147 Double 4" Standard Lap

Low-Gloss Finish 12'6" length / Thickness .044" (+.002,-.001) • 106.1 lbs. per carton 24 pieces per carton / 2 squares • 38 squares per crate

148 Double 5" Standard Lap

Low-Gloss Finish 12'0" length / Thickness .044" (+.002,-.001) • 99.16 lbs. per carton 20 pieces per carton / 2 squares • 34 squares per crate



149 Double 4.5" Dutch Lap

Low-Gloss Finish 12'1" length / Thickness .044" (+.002,-.001) • 102.34 lbs. per carton 22 pieces per carton / 2 squares • 32 squares per crate



STANDARD COLORS



NATURAL TRADITIONS COLORS



DARK COLOR

THISTLE

WHITE

Colors shown may vary from actual material. Request color samples for true representation.

* Available in Double 4" Standard Lap and Double 4.5" Dutch Lap

Forest Ridge and Shadow Ridge Vinyl Siding

- Color-through technology minimizes the appearance of scratches
- .042" thickness with 1/2" projection
- Premium colors are also backed by a 25-year Excessive Color Fade Warranty
- Luran®S ASA resin used for premium collection adds extra UV protection
- Curl-over nail hem helps resist wind loads up to 180 mph

Forest Ridge Vinyl Siding

Classic look of traditional siding

With a broad color palette and a value price, Forest Ridge vinyl siding is the ideal choice for homeowners who appreciate the traditional look and warmth of clapboard siding.



105 Double 4" Standard Lap

Wood Grain Finish 12'6" length / Thickness .042" (+.002,-.001) • 94.67 lbs. per carton 24 pieces per carton / 2 squares • 40 squares per crate



116 Double 5" Standard Lap

Wood Grain Finish 12'0" length / Thickness .042" (+.002,-.001) • 89.61 lbs. per carton 20 pieces per carton / 2 squares • 38 squares per crate

ALMOND	BEIGE
BLUE	CLAY
CREAM	FLINT
GRAY	MIST
OLIVE	PEARL
TAN	WHITE

PREMIUM COLORS



DARK COLOR



Colors shown may vary from actual material. Request color samples for true representation.

Shadow Ridge Vinyl Siding

Distinctive Dutch Lap profile

A gentle curve at the panel top gives a home an old-fashioned dimensional appeal. Homes sided with Shadow Ridge vinyl siding make a striking statement.

(2000)

109 Double 4" Dutch Lap

Wood Grain Finish 12'6" length / Thickness .042" (+.002,-.001) 94.96 lbs. per carton • 24 pieces per carton / 2 squares • 38 squares per crate



119 Double 5" Dutch Lap Wood Grain Finish

12'0" length / Thickness .042" (+.002,-.001) 89.67 lbs. per carton • 20 pieces per carton / 2 squares • 34 squares per crate



STANDARD COLORS

CALL BlueLinx • AT

66

Vision Pro Vinyl Siding

Versatility and value

Profile. Describing both the shape and height of the boards, a panel's profile largely determines the exterior look of a home.

- Wood grain finish with freshly painted look
- Complements a full range of architectural styles
- Proven, cost-effective siding solution for durable, long-term protection
- Color-through technology minimizes the appearance of scratches
- Backed by a Limited Lifetime Transferable Warranty
- Durable .040" thickness with 1/2" projection helps resist wind loads up to 165 mph



125 Double 4" Standard Lap

Wood Grain Finish 12'6" length / Thickness .040" (+.002,-.001) 86.42 lbs. per carton • 24 pieces per carton / 2 squares 40 squares per crate



135 Double 5" Standard Lap

Wood Grain Finish 12'0" length / Thickness .040" (+.002,-.001) 81.84 lbs. per carton • 20 pieces per carton / 2 squares 40 squares per crate



129 Double 4" Dutch Lap

Wood Grain Finish 12'6" length / Thickness .040" (+.002,-.001) 86.68 lbs. per carton • 24 pieces per carton / 2 squares 38 squares per crate



139 Double 5" Dutch Lap

Wood Grain Finish 12'0" length / Thickness .040" (+.002,-.001) 81.90 lbs. per carton • 20 pieces per carton / 2 squares 34 squares per crate

ALMOND BEIGE BLUE CLAY

STANDARD COLORS



DARK COLOR

THISTLE

Colors shown may vary from actual material. Request color samples for true representation.

GO TO PAGE 49 For Bluecor Insulation



Chatham Ridge Vinyl Siding

Colonial style, an American favorite

Narrow, Traditional Profile. Ideal for enhancing the look of smaller homes, Chatham Ridge vinyl siding's narrow, 3" Traditional Lap profile gives the impression of colonial clapboard siding.

Subtle wood grain texture

STANDARD COLORS

- Colonial-style clapboard adds detail and dimension
- Triple Narrow 3" Traditional Lap
- Color-through technology minimizes the appearance of scratches
- Durable .040" thickness with 1/2" projection helps resist wind loads up to 165 mph




171 3" Triple Panel

Wood Grain Finish 12'1" length / Thickness .040" (+.002,-.001) 90.87 lbs. per carton • 22 pieces per carton / 2 squares • 40 squares per crate



STANDARD COLORS

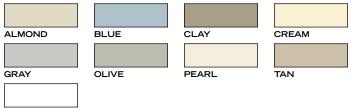

WHITE

Colors shown may vary from actual material. Request color samples for true representation.

Board & Batten

Bold vertical style

Board & Batten. The 7" vertical profile provides bold emphasis as an accent panel or full exterior coverage. Board & Batten siding is a favorite choice when you want a home with the appearance of a cottage or mountain retreat.

- Create a bold vertical emphasis or accent
- Attractive wood grain finish with look of freshly painted wood
- Color-through technology minimizes the appearances of scratches
- Durable .048" panel thickness helps resist wind loads up to 180 mph**



160 Single Vertical Board & Batten Wood Grain Finish 10'0" length / Thickness .048" (+.002,-.001)

53.90 lbs. per carton • 17 pieces per carton / 1 squares • 20 squares per crate



CALL BlueLinx •• AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

Castle Ridge Vinyl Siding

Classic simplicity

Simple Character. A Traditional Lap profile and the look of authentic, freshly painted cedar adds beautiful character to any home.

- Deeply embossed wood grain texture
- Durable, weather-resistant vinyl
- Single 8" lap
- .044" thickness is greater than most vinyl siding

STANDARD COLOR

WHITE	

130 Single 8"

Wood Grain Finish 12'6" length / Thickness .044" (+.002,-.001) 99.76 lbs. per carton • 24 pieces per carton / 2 squares • 34 squares per crate



SomersetVinyl Siding

Beaded elegance

Beaded Profile. Featuring a full bead at the bottom of each panel, SomersetTM vinyl siding combines the hand-crafted look of yesterday with the best of today to give any home a sophisticated look.

- Classic 6-1/2" Full Beaded Lap profile with smooth, brushed finish
- Suggests hand-crafted traditional formality
- Color-through technology minimizes the appearance of scratches
- Substantial .044" thickness with 5/8" projection helps resist wind loads up to 165 mph




120 6-1/2" Beaded Panel

Smooth, Brushed Finish 12'4" length / Thickness .044" (+.002,-.001) 112.17 lbs. per carton • 30 pieces per carton / 2 squares • 30 squares per crate

Recommended for installation with 3" Horizontal Starter Strip 302

STANDARD COLORS

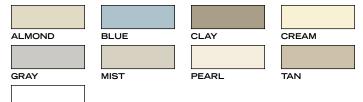

WHITE

DARK COLOR



Colors shown may vary from actual material. Request color samples for true representation.



69

Cedar Spectrum Hand-Split and Shingle Siding

Rustic character and design flexibility

- Rustic wood grain finish on all exposed surfaces
- Attractive and durable alternative to hand-cut or real shingle siding
- Molded from long-lasting polymers to help resist sunlight and warping
- Complete seamless corner post solution provides corner-to-corner hand-split or shingle look
- Durable .100" nominal thickness
- Backed by a Limited Lifetime Transferable Warranty

Cedar Spectrum Hand-Split Siding

Cedar Spectrum Hand-Split siding lends rustic character to any home.



560 Cedar Spectrum Hand-Split Siding* 58 1/8" length / Thickness .100" Nominal 41 lbs. per carton 7 pieces per carton / 1/2 squares • 9 squares per pallet

Cedar Spectrum Shingle Siding

*Requires 3/4" pocket accessories

Cedar Spectrum Shingle siding's versatility makes it a great choice as a textured accent or full house coverage.




556 Cedar Spectrum Shingle Siding*

54 5/8" length / Thickness .100" Nominal 43 lbs. per carton • 10 pieces per carton / 1/2 squares • 7 squares per pallet *Requires 3/4" pocket accessories





PREMIUM COLORS



VARIEGATED COLORS





Colors shown may vary from actual material. Request color samples for true representation.



Cedar Spectrum Round Cut Siding

Victorian charm and beauty

Perfect for accents, Cedar Spectrum Round Cut Siding features a lightly embossed wood grain on all exposed surfaces, resulting in the realistic look of traditional wood scallops.

- Round Cut with a woodgrain finish for a hand-cut appearance
- Molded from long-lasting polymers to help resist sunlight and warping
- Interlocking fingers offer solid application and accurate fit
- Durable .080" nominal thickness
- Backed by a Limited Lifetime Transferable Warranty



Colors shown may vary from actual material. Request color samples for true representation.





559 Cedar Spectrum Round Cut Siding*

51 3/4" length / Thickness .080" Nominal 39 lbs. per carton • 12 per carton / 1/2 squares 8 squares per pallet *Requires 3/4" pocket accessories

Accessories



558 Cedar Spectrum Hand-Split Outside Corner Post

Colors: See Hand-Split Colors 3-1/2" width / Thickness .100" Nominal 13 lbs. per carton • 10 pieces per carton



557 Cedar Corner Post

Colors: See Shingle Siding Colors 3-1/2" width / Thickness .100" Nominal 15.7 lbs. per carton • 10 pieces per carton



36613999 Universal Aluminum Cedar Starter

Mill Finish 10.0" length • 33 lbs. per carton • 50 pieces per carton Thickness .019 Nominal



36612999 Universal Galvanized Steel Cedar Starter

Mill Finish 10.0" length 48 lbs. per carton • 25 pieces per carton



563 Cedar Spectrum Finish Trim Colors: Standard and Premium Shingle Colors 12'6" length

25 lbs. per carton • 24 pieces per carton



AT WWW.BLUELINXCO.COM FOR ADDITIONAL PRODUCT LITERATURE

7

Parkside Vinyl Siding



107 Double 4" Standard Lap

Wood Grain Finish 12'6" length / Thickness .038" (+.002,-.001) • 83.08 lbs. per carton 24 pieces per carton / 2 squares • 30 squares per crate



117 Double 5" Standard Lap

Wood Grain Finish 12'0" length / Thickness .038" (+.002,-.001) • 76.24 lbs. per carton 20 pieces per carton / 2 squares • 30 squares per crate



106 Double 4" Dutch Lap Wood Grain Finish

12'6" length / Thickness .038" (+.002,-.001) • 83.34 lbs. per carton 24 pieces per carton / 2 squares • 36 squares per crate



115 Double 5" Dutch Lap

Wood Grain Finish 12'0" length / Thickness .038" (+.002,-.001) • 76.30 lbs. per carton 20 pieces per carton / 2 squares • 34 squares per crate



110 Double 4.5" Dutch Lap

Wood Grain Finish 12'1" length / Thickness .038" (+.002,-.001) • 80.45 lbs. per carton 22 pieces per carton / 2 squares • 36 squares per crate



173 Triple 3-1/3" Standard Lap

Wood Grain Finish 12'0" length / Thickness .038" (+.002,-.001) • 82.88 lbs. per carton 20 pieces per carton / 2 squares • 30 squares per crate






Colors shown may vary from actual material. Request color samples for true representation.



GP PARKSIDE DUTCH LAP

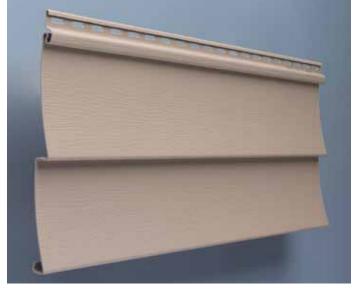

GP PARKSIDE TRADITIONAL LAP

Parkside Vinyl Skirting

Finish your home with style

Looking for the perfect finishing touch for a home, deck, or hot tub? Parkside Vinyl Skirting is a beautiful solution, offering a finished look with a vented option.

- Authentic wood grain emboss
- Available in solid or center designs
- Ventilated skirting features built-in center vents
- Patented pop-up top rail gives easy access to storage and utilities
- Low maintenance vinyl washes clean with a garden hose, resists dents and insect damage



430 Solid Panel

Deep Wood Grain Finish 8'0" length 16" exposure • 52.95 lbs. per carton 18 panels per carton / 192 square feet 10 cartons per crate



432 Center Vent Panel

Basketweave Finish 8'0" length 16" exposure • 52.95 lbs. per carton 18 panels per carton / 192 square feet 10 cartons per crate

Parkside Skirting Accessories



461 Top Back Rail

Colors: Cream, Gray, Tan, White 8'0" length • 61 lbs. per carton 40 pieces per carton / 320 lineal feet



462 Hinge Style Top Front Rail Colors: Cream, Gray, Tan, White 8'0" length • 61 lbs. per carton 40 pieces per carton / 320 lineal feet



463 Bottom Rail Colors: Cream, Gray, Tan, White 8'0" length • 61 lbs. per carton 40 pieces per carton / 320 lineal feet



Color: N/A • 250 1" length Attachment Screws and 125 Ground Spikes per carton

456 Hinge Style Trim Pack

Colors: Cream, Gray, Tan, White 98 lbs. per carton • 14 pieces each: Top Back, Front, and Bottom Rails • 250 - Screws • 125 - 7" Spikes

457 Wind Resistant Trim Pack Colors: Cream, Gray, Tan, White 98 lbs. per carton • 14 pieces each: Top Back, Front, and Bottom Rails • 250 - Screws • 125 - 7" Spikes

STANDARD COLORS CREAM GRAY TAN WHITE Colors shown may vary from actual material. Request color samples for true representation. 513 Skirting Hardware

VISIT BlueLinx

73

Vinyl Soffit and Accessories

Using high-grade trim coil, soffit, and fascia helps reduce costly repairs and maintenance caused by the effects of rain, snow, and wind. These accessories are rated by their performance given the time and expense that siding projects entail, and BlueLinx provides options that help uphold the overall appearance and structural integrity of your home.

T/4 Soffit

	1
--	---

150 Triple 4" Solid Soffit Pebble Finish

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, White



151 Triple 4" Full-Vent Soffit Basketweave Venting w/Pebble Finish

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, White

|--|

152 Triple 4" Center Vent Soffit Basketweave Venting w/Pebble Finish **Colors:** Almond, Beige, Blue, Clay, Cream, Flint, Gray,

Mist, Musket Brown, Olive, Pearl, Tan, White

D/5 Soffit



140 Double 5" Vertical/Soffit

Wood Grain Finish **Standard Colors:** Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Pewter, Sagebrook, Wedgewood, Hampton Red*

141 Double 5" Perforated Soffit

Wood Grain Finish **Standard Colors:** Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Pewter, Sagebrook, Wedgewood, Hampton Red*



144 Double 5" Soffit Wood Grain Finish Color: White

145 Double 5" Perforated Soffit Wood Grain Finish Color: White **Product Specs:** 12'0" length / Thickness .035" (+.002, -.001) 76.93 lbs. per carton • 16 pieces per carton / 1.92 squares 36 squares per crate

Product Specs: 12'0" length / Thickness .035" (+.002, -.001) 76.93 lbs. per carton • 16 pieces per carton / 1.92 squares 34 squares per crate Net Free Air Space: 14.34 sq. inches / square foot

Product Specs: 12'0" length / Thickness .035" (+.002, -.001) 76.93 lbs. per carton • 16 pieces per carton / 1.92 squares 34 squares per crate Net Free Air Space: 4.78 sq. inches / square foot

Product Specs: 12'0" length / Thickness .044" (+.002, -.001) 94.50 lbs. per carton • 20 pieces per carton / 2 squares 34 squares per crate * *Hampton Red approved for soffit use only*

Product Specs: 12'0" length / Thickness .044" (+.002, -.001) 89.14 lbs. per carton • 20 pieces per carton / 2 squares 34 squares per crate Net Free Air Space: 6.20 sq. inches / square foot * Hampton Red approved for soffit use only

Product Specs: 12'0" length / Thickness .040" (+.002, -.001) 86.64 lbs. per carton • 20 pieces per carton / 2 squares 34 squares per crate

Product Specs: 12'0" length / Thickness .040" (+.002, -.001) 81.78 lbs. per carton • 20 pieces per carton / 2 squares 34 squares per crate Net Free Air Space: 6.20 sq. inches/ square foot

Soffit Installation Components



305 1/2" J-Channel

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, Thistle, White



342 1/2" F-Trim

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, Thistle, White



343 H-Mold

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, Thistle, White



383 8" Fascia

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White

Product Specs: 12'6" length • 40.35 lbs. per carton 40 pieces per carton / 500 feet • 52 cartons per crate

Product Specs: 12'6" length • 50.59 lbs. per carton 24 pieces per carton / 300 feet • 20 cartons per crate

Product Specs: 12'6" length • 89.74 lbs. per carton 24 pieces per carton / 300 feet • 27 cartons per crate



Beaded Soffit



157 Beaded, 7" exposure Solid Soffit w/Pebble Finish **Color:** White



158 Beaded, 7" exposure Hidden-Vent Soffit w/Pebble Finish **Color:** White Product Specs: 12'0" length / Thickness .040" (+.002, -.001) 112.84 lbs. per carton • 28 pieces per carton / 2 squares 34 squares per crate

Product Specs: 12'0" length / Thickness .040" (+.002, -.001) 111.66 lbs. per carton • 28 pieces per carton / 2 squares 34 squares per crate • Net Free Air Space: 2.66 sq. inches / square foot

Beaded Soffit Installation Components



304 3/8" J-Channel Pebble Finish w/Low-Gloss **Color:** White **Product Specs:** 12'6" length • 36.78 lbs. per carton 40 pieces per carton • 40 cartons per crate



338 3/8" F-Trim Pebble Finish w/Low-Gloss **Color:** White

Product Specs: 12'6" length • 42.28 lbs. per carton 40 pieces per carton • 52 cartons per crate

1 13/16	8
---------	---

340 3/8" H-Mold Pebble Finish w/Low-Gloss **Color:** White

Product Specs: 12'6" length • 53.02 lbs. per carton 24 pieces per carton • 27 cartons per crate

Installation Components



302 3" Horizontal Starter Strip Recommended for installation with Somerset Beaded Panel • **Color:** N/A

Product Specs: 12'6" length • 56.49 lbs. per carton 40 pieces per carton / 500 feet • 27 cartons per crate



303 Sturdy Vinyl Starter Strip Color: N/A

Product Specs: 10'0" length • 48.50 lbs. per carton 50 pieces per carton / 500 feet • 45 cartons per crate

Product Specs: 12'6" length • 38.63 lbs. per carton 40 pieces per carton / 500 feet • 40 cartons per crate



306 5/8" J-Channel Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Musket Brown, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Hampton Red, Pewter, Sagebrook, Wedgewood

6



Installation Components



307 3/4" J-Channel

Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Pearl, Tan, White Premium Colors: Briarwood, Hampton Red, Pewter, Sagebrook, Wedgewood



308 1-1/8" J-Channel

Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Pearl, Tan, White



316 Wide Flange J

Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White



321 Undersill Trim

Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Hampton Red, Pewter, Sagebrook, Wedgewood

328 Standard Flint, G

328 One Piece Wide Crown Mold Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, White **Product Specs:** 12'6" length • 40.18 lbs. per carton 40 pieces per carton / 500 feet • 40 cartons per crate

Product Specs: 12'6" length • 44.71 lbs. per carton 40 pieces per carton / 500 feet • 27 cartons per crate

Product Specs: 12'6" length • 49.31 lbs. per carton 24 pieces per carton / 300 feet • 27 cartons per crate

Product Specs: 12'6" length • 30.15 lbs. per carton 40 pieces per carton / 500 feet • 70 cartons per crate

Product Specs: 12'6" length • 42.46 lbs. per carton 24 pieces per carton / 300 feet • 20 cartons per crate

Installation Components



3311-3/8" Drip Cap Color: White

Product Specs: 12'6" length • 18.62 lbs. per carton 24 pieces per carton / 300 feet • 54 cartons per crate



333 5/8" Extended Face J-Channel Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White

Product Specs: 12'6" length • 53.03 lbs. per carton 40 pieces per carton / 500 feet • 27 cartons per crate

344 Narrow Cove Mold Mist, Musket Brown, Olive, Pearl, Tan, White

Product Specs: 12'6" length • 31.55 lbs. per carton Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, 24 pieces per carton / 300 feet • 40 cartons per crate





Installation Components



347 Window/Door Trim

Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, White

Product Specs: 12'6" length • 78.86 lbs. per carton 40 pieces per carton / 500 feet • 20 cartons per crate



351 4" x 3/4" Outside Corner Post Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White Premium Colors: Briarwood, Cobblestone, Pewter, Sagebrook, Wedgewood

Product Specs: 10'0" length • 37.84 lbs. per carton 10 pieces per carton / 100 feet • 12 cartons per crate



354 Snap-On Corner Post (Use with J-Channel) **Colors:** Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, White

Product Specs: 10'0" length • 36.77 lbs. per carton 24 pieces per carton / 240 feet • 12 cartons per crate

Product Specs: 10'0" length • 17.59 lbs. per carton

10 pieces per carton / 100 feet • 30 cartons per crate



361 3/4" Inside Corner Post Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Hampton Red, Pewter, Sagebrook, Wedgewood

2 734

362 Bay Window Corner Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Briarwood, Cobblestone, Pewter, Sagebrook, Wedgewood **Product Specs:** 10'0" length • 34.72 lbs. per carton 10 pieces per carton / 100 feet • 12 cartons per crate



365 Wide Crown Mold Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White

Product Specs: 12'6" length • 29.71 lbs. per carton 24 pieces per carton / 300 feet • 40 cartons per crate



Installation Components



366 Universal Back Plate Color: N/A

Product Specs: 12'6" length • 30.79 lbs. per carton 24 pieces per carton / 300 feet • 70 cartons per crate



367 Frieze Back Plate Color: N/A

Product Specs: 12'6" length • 40.51 lbs. per carton 24 pieces per carton / 300 feet • 40 cartons per crate



371 3" x 3/4" Outside Corner Post Standard Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White **Premium Colors:** Hampton Red

Product Specs: 10'0" length • 30.33 lbs. per carton 10 pieces per carton / 100 feet • 15 cartons per crate

3

373 3" x 3/4" x 102" Outside Corner Post Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, White

Product Specs: 8'6" length • 25.78 lbs. per carton 10 pieces per carton / 85 feet • 15 cartons per crate



377 6" x 3/4" Fluted Outside Corner Post (A special order requirement will apply) Color: White

Product Specs: 20'0" length • 38.20 lbs. per carton 4 pieces per carton / 80 feet • 8 cartons per crate



398 Decorative Corner Starter Colors: Clay, Gray, Pearl, Tan, White

Product Specs: 20'0" length • 57.08 lbs. per carton 10 pieces per carton / 200 feet • 25 cartons per crate



390 3 1/2" Window and Door Surround Low-Gloss Pebble Finish **Colors:** Clay, Gray, Pearl, Tan, White Use with 393 or 394 Starter Strips (A special order requirement will apply)

5-

80

391 5" Window and Door Surround Low-Gloss Pebble Finish **Colors:** Clay, Gray, Pearl, Tan, White Use with 393 or 394 Starter Strips (A special order requirement will apply) **Product Specs:** 20'0" length • 53.95 lbs. per carton 10 pieces per carton / 200 feet • 32 cartons per crate

Product Specs: 20'0" length • 61.62 lbs. per carton 10 pieces per carton / 200 feet • 23 cartons per crate

Installation Components



393 New Construction Starter Strip Color: N/A For use with 390 or 391

For use with 390 or 391



394 Recessed Starter Strip Colors: Clay, Gray, Pearl, Tan, White For use with 390 or 391 **Product Specs:** 10'0" length • 41.22 lbs. per carton 40 pieces per carton / 400 feet 27 cartons per crate

Product Specs: 10'0" length • 44.18 lbs. per carton 40 pieces per carton / 400 feet • 38 cartons per crate

Product Specs: 12'6" length • 33.72 lbs. per carton

Product Specs: 12'6" length • 41.16 lbs. per carton

24 pieces per carton / 300 feet • 41 cartons per crate

10 pieces per carton / 125 feet • 32 cartons per crate



395 12'6" (3-3/4" Window and Door Surround) Low-Gloss Pebble Finish Use with 393 or 394 Starter Strips • Color: White



396 Dual Undersill Trim Colors: Almond, Beige, Blue, Clay, Cream, Flint, Gray, Mist, Olive, Pearl, Tan, Thistle, White

7 Traditional Outside Corner Post

Product Specs: 20'0" length • 67 lbs. per carton

4 pieces per carton



407 Traditional Outside Corner Post Color: White



506 5/8" Flexible 5 0 6 J-Channel Colors: Beige, Pewter, Tan, White

Product Specs: 12'6" length • 45 lbs. per carton 20 pieces per carton / 250 feet • 30 cartons per crate





Richwood

Mounting blocks are used to install electrical outlets, water faucets, light fixtures, mailboxes, house numbers, and even doorbells. Richwood Mounting Blocks are built to withstand the toughest weather and retain their color and beauty over the life of a home. They will not chip, crack, or split. Matched to virtually any vinyl siding color, Richwood offers up to 120 exciting colors. Also look to Richwood for vents! Designed for a variety of uses, all Richwood Vents are specially engineered to prevent intrusion by birds, insects, and animals, and are made to last for years to come. Sturdy utility vents provide excellent cross-ventilation of garages, foundations, and range hoods. Richwood's Louvered Exhaust Vent is also ideal for removing the moist air of dryers and bathrooms.

Richwood Mounting Blocks & Vents

It's easy to make any home special when wrapped in the beauty and elegance of the Richwood collection.

- Quality Assurance Mounting blocks are built to withstand the toughest weather and retain their color and beauty over the life of your home. They will not chip, crack, or split.
- Simple to Install Select Richwood products have a two-piece design that easily adjusts from 3/4" to 11/4". This feature allows for easy installation over many siding choices, including insulated vinyl siding.
- Lasting Durability With a Limited Lifetime Warranty* for long-term peace of mind.
- Perfect Color Match Because Richwood mounting blocks and vents are made to exactly match to Georgia-Pacific products, you can select with confidence.



Richwood Mounting Blocks

See color matrix on page 87 for color availability.



BLOCK J-Block® Mounting Block Uses: Light Fixtures, Electrical Outlet Receptacles, Water Faucets



BLOCKSC J-Block Mounting Block



BLOCKSLD J-Block Mounting Block



FMOUNTSNB J-Block Mounting Block Uses: Light Fixtures



METER Meter Base J-Block Uses: Hose Racks, Electrical Meter Bases



FM BLOCK Large J-Block Mounting Block Uses: Light Fixtures, Mailboxes, House Numbers



MBLOCK Mini J-Block Mounting Block Uses: Doorbells, Electrical Outlets



MBLOCKR Split Recessed J-Block Mounting Block Uses: Faucets, Electrical Outlets. Hinged to fit around existing fixtures



EBLOCK UL® Electrical Block Includes electical box and mounting block **Product Specs:** 7" X 7" surface dimensions • 8-1/2" X 7-1/2" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. Scored Knockouts: Round: 4" diameter • Rectangle: 2-3/8" X 3-3/4" 5 lbs. per carton • 10 pieces per carton

Product Specs: 7" X 7" surface dimensions • 8-1/2" X 7-1/2" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. • 2-3/8" X 3-3/4" Scored Knockout • Scored Knockouts: Round: 4" diameter • Rectangle: 2-3/8" X 3-3/4" • 5 lbs. per carton • 10 pieces per carton

Product Specs: 7" X 7" surface dimensions • 8-1/2" X 7-1/2" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. • 2-3/8" X 3-3/4" Scored Knockout • 4" Scored Knockout • Scored Knockouts: Round: 4" diameter • Rectangle: 2-3/8" X 3-3/4" • 5 lbs. per carton • 10 pieces per carton

Product Specs: 7 1/8" x 8 1/8" • 3/4" siding receiver • 1" depth 4 lbs. per carton • 10 2-systems per carton

Product Specs: 16-1/2" X 15-1/2" surface dimensions • 18-1/2" X 16-3/4" flange dimensions • 1-1/4" J-Channel I.D. 10 lbs. per carton • 5 pieces per carton

Product Specs: 7" X 11" surface dimensions • 7-3/4" X 12-3/4" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. Scored Knockouts: Round: 4" Diameter • 4 lbs. per carton • 5 pieces per carton

Product Specs: 6" X 4-3/8" surface dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. • 6-7/8" X 5-1/4" flange dimensions Scored Knockouts: Round: 1-1/8" diameter • Rectangle: 2-3/8" X 3-3/4"

Product Specs: 5-1/4" X 7" surface dimensions • 5-7/8" X 7-1/2" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. Scored Knockouts: Rectangle: 2-1/4" X 3-7/8" • 4 lbs. per carton 10 pieces per carton

Product Specs: 7 1/8" x 7 3/4" • Siding Receiver: 5/8"- 1" in 1/8" increments • Scored Knockouts • 1 lb. per carton • 1 piece per carton



2ULBLOCK UL Electrical Block Includes electical box and mounting block

Product Specs: 7 1/8" x 7 3/4" • Siding Receiver: 5/8"- 1" in 1/8" increments • Scored Knockouts • 1 lb. per carton • 1 piece per carton

Richwood Mounting Blocks

See color matrix on page 87 for color availability.

Water Faucets



EZBLK040 Square Surface Mount (Double 4" or Double 5") Uses: Light Fixtures, Electrical Outlet Receptacles,

EZBLK080 Octagon Surface Mount (Double 4" or Double 5") Uses: Light Fixtures, Electrical Outlet Receptacles, Water Faucets



EZBLK050 Square Surface Mount (Triple 3") **Uses:** Light Fixtures, Electrical Outlet Receptacles, Water Faucets



EZBLK110 Octagon Surface Mount (Dutch Lap) Uses: Light Fixtures, Electrical Outlet Receptacles, Water Faucets

EZBLK070 Square Surface Mount (Dutch Lap) **Uses:** Light Fixtures, Electrical Outlet Receptacles, Water Faucets



DRYERHOOD Hooded Exhaust Vent System

Product Specs: 6-3/4" X 6-3/4" surface dimensions 3/4" projection • Scored Knockouts: Round: 1" diameter Rectangle: 2-3/8" X 3-3/4" • 4 lbs. per carton 10 pieces per carton

Product Specs: 6-3/4" X 6-3/4" surface dimensions 3/4" projection • Scored Knockouts: Round: 1" diameter Rectangle 2-3/8" X 3-3/4" • 4 lbs. per carton 10 pieces per carton

Product Specs: 6-3/4" X 6-3/4" surface dimensions 3/4" projection • Scored Knockouts: Round: 1" diameter Rectangle 2-3/8" X 3-3/4" • 4 lbs. per carton 10 pieces per carton

Product Specs: 6-3/4" X 6-3/4" surface dimensions 3/4" projection • Scored Knockouts: Round: 1" diameter • Rectangle 2-3/8" X 3-3/4" 4 lbs. per carton • 10 pieces per carton

Product Specs: 6-3/4" X 6-3/4" surface dimensions 3/4" projection • Scored Knockouts: Round: 1" diameter Rectangle: 2-3/8" X 3-3/4" • 4 lbs. per carton 10 pieces per carton

Product Specs: 3/4" siding receiver; 3/4" adjusts to 1 1/4" 1 system per carton • 1 lb. per carton



AIRVENT Air Vent

Product Specs: 19 Sq. In. net free area • 7" X 11" surface dimensions • 7-3/4" X 12-3/4" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. • 4 lbs. per carton • 5 pieces per carton



FVENT Foundation Vent

Product Specs: 8-3/4" X 17" surface dimensions 9-1/2" X 18-1/4" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. 50 Square In. net free area 11 lbs. per carton • 10 pieces per carton



EXVENT Louvered Exhaust VentBlock

Product Specs: " X 7" surface dimensions • 8-1/2" X 7-1/2" flange dimensions • 3/4" adjusts to 1-1/4" J-Channel I.D. 10" tube length • 4" tube diameter • 1 lb. per carton 1 system per carton



INTAKE Intake Louver **Note:** For use with EXVENT

Product Specs: 4-5/8" H X 4-5/8" W X 1-3/8" D Size 1 lb. per carton • 5 pieces per carton

Richwood Mounting Blocks See color matrix on page 87 for color availability.



INTVENT Soffit Intake/Exhaust Vent

Uses: Soffit Applications, Kitchen Exhaust, Bathroom Exhaust. Fire Hazard: NEVER use exhaust vent w/screen for dryer ventilation. Flammable buildup on screen can cause fire. Always use a vent that is specifically designed for dryer appliances.

Product Specs: 5/8'' - 1 - 1/4'' in 1/8'' increments siding receiver 9.2 Sq. In. net free area • 1 lb. per carton 1 piece per carton



Richwood Gable Vents

See color matrix on page 87 for color availability.

|--|

RDGV18 18" Round Gable Vent

Product Specs: $3/4" - 1 \cdot 1/4"$ in 1/8" increments siding receiver $1 \cdot 1/2"$ thickness 46.3 Sq. In. net free area • 3 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 37.1 Sq. In. net free area • 5 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 198.2 Sq. In. net free area • 9 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 50.7 Sq. In. net free area • 3 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 37.4 Sq. In. net free area • 5 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 78.6 Sq. In. net free area • 8 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness $\bullet 189.4$ Sq. In. net free area \bullet 6 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 189.4 Sq. In. net free area • 6 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 30.9 Sq. In. net free area • 4 lbs. per carton 1 system per carton

Product Specs: 3/4" - 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 99.4 Sq. In. net free area • 6 lbs. per carton 1 system per carton



RDGV36 36" Round Gable Vent

RDGV 22" Round Gable Vent



OCTGV18 18" Octagon Gable Vent



OCTGV 22" Octagonal Gable Vent



HRDGV 34" X 22" Half-Round Gable Vent

|--|

RDTOPGV14 14" X 22" Round Top Gable Vent



RDTOPGV24 24" X 34" Round Top Gable Vent

|--|

RECTGV 14" X 20" Rectangular Gable Vent



RECTGV1824 18" X 24" Rectangular Gable Vent

86



Richwood Gable Vents

See color matrix for color availability.



RECTGV2430 24" X 30"

Rectangular Gable Vent 3/4" – 1-1/4" in 1/8" increments siding receiver 1-1/2" thickness • 206.3 Sq. In. net free area 9 lbs. per carton • 1 system per carton

|--|

SQGV1414 14" Square Gable Vent 3/4" – 1-1/4" in 1/8" increments siding receiver

1-1/2" thickness • 33.7 Sq. In. net free area 3 lbs. per carton • 1 system per carton



Richwood Color	Matrix	
Manufacturer	Color	Richwood Code
Georgia-Pacific	Almond	PA
Georgia-Pacific	Beige	EX
Georgia-Pacific	Blue	BK
Georgia-Pacific	Briarwood	100
Georgia-Pacific	Cherry	S7
Georgia-Pacific	Chestnut	BQ
Georgia-Pacific	Clay	PC
Georgia-Pacific	Cobblestone	JK
Georgia-Pacific	Cream	PB
Georgia Pacific	Flint	ED
Georgia Pacific	Gray	EQ
Georgia Pacific	Hampton Red	290
Georgia-Pacific	Ironwood	BH
Georgia-Pacific	Leaf	NC
Georgia-Pacific	Maple	GR
Georgia-Pacific	Mesquite	170
Georgia-Pacific	Mist	BI
Georgia-Pacific	Musket Brown	N/A
Georgia-Pacific	Oak	FQ
Georgia-Pacific	Olive	511
Georgia-Pacific	(Paintable)	11
Georgia-Pacific	Pearl	PP
Georgia-Pacific	Pewter	090
Georgia-Pacific	Sage	GH
Georgia-Pacific	Sagebrook	170
Georgia-Pacific	Shaded Cedar	GR
Georgia-Pacific	Shaded Gray	ED
Georgia-Pacific	Sycamore	PT
Georgia-Pacific	Tan	A7
Georgia-Pacific	Thistle	510
Georgia-Pacific	Wedgewood	390
Georgia-Pacific	White	PW

Richwood Shutters

Richwood shutters retain their high quality and vibrant color through the life of a home and are maintenance-free. Richwood achieves this tremendous quality through its use of advanced UV stabilizers and a tough acrylic coating, which minimize the effects of sun, rain, and wind. Richwood shutters will not split, crack, peel, or fade. In fact, Richwood feels so strongly about quality that they offer a lifetime limited warranty on all shutters. Richwood offers classic styles like the louvered design, as well as the raised panel design. Shutters are available in 15 classic colors and factory finished to ensure quality and consistency.



Richwood Measuring & Ordering

Whether you're selecting a standard shutter or a custom order, Richwood makes it easy to achieve the right look with top quality shutters in a variety of colors, styles, and sizes.

Determine the size that fits the windows by measuring the length (A) and width (B). Raised Panel or Louvered Arch Tops can be added to circle top windows over 15" standard shutters. The Raised Panel Transom Top can be used over 15" standard shutters to accent a transom window.






RAISED PANEL SHUTTER


LOUVERED SHUTTER

Richwood	Measuring		
	24 or less	24-26"	36" or more
25"-29"	25"-29"	12" x 27"*	15" x 25"*
30"-33"	30"-33"	12" x 31"	15" x 31"
34"-36"	34"-36"	12" x 35"	15" x 35"
37"-40"	37"-40"	12" x 39"	15" x 39"
41"-44"	41"-44"	12" x 43"	15" x 43"
45"-48"	45"-48"	12" x 47"	15" x 47"
49"-52"	49"-52"	12" x 51"	15" x 51"
53"-56"	53"-56"	12" x 55"	15" x 55"
57"-60"	57"-60"	12" x 59"	15" x 59"
61"-64"	61"-64"	12" x 63"	15" x 63"
65"-68"	65"-68"	12" x 67"**	15" x 67"**
69"-72"	69"-72"	12" x 71"	15" x 71"
73"-77"	73"-77"	n/a	15" x 75"
78"-82"	78"-82"	n/a	15" x 81"
83"-96"	83"-96"	12" x 83"-96"	15" x 83"-96"

Richwood standard shutters are 12" and 15" wide. *Available in Louvered style only. ** Available in Cottage Style. Arch and Transom Tops are available in 15" widths only. Sizes shaded in light blue are custom orders.

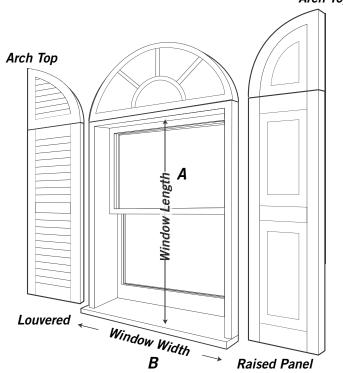

HOW TO MEASURE FOR SHUTTERS



Raised panel shutters offer the unique, turn-of-thecentury look of the grand homes of the South, but with a contemporary richness and style. Their simple lines create a striking profile to any home. Richwood's raised panel shutters can be purchased in both custom and standard sizes, and come with our Limited Lifetime Warranty. They can be paired with matching transom or arch tops for added height and impact. STANDARD STYLE (RAISED PANEL)

COTTAGE STYLE (RAISED PANEL)

STANDARD STYLE (LOUVERED)

COTTAGE STYLE (LOUVERED)

Louvered shutters

offer a classic look in the traditions of American history, and our elegant louvered shutters provide the perfect finishing touch to any home by capturing the rich natural woodgrain texture of real wood shutters, but without the splitting, cracking, and peeling. Richwood louvered shutters can be paired with arch tops to accent circle top windows.


89

VISIT BlueLinx

Arch Top



* Also available in white (11)



REGULAR STYLE

90

Standard Raised Panel Shutters

Note: All shutter cartons include 3" painted steel mounting screws & shutter plugs. Shutter touch-up paint available.

Nominal 12" wide High-density copolymer Baked-on acrylic finish 1 pair per carton

Product Specifications		
Product Code	Length	Lbs./Ctn.
VINRP1227	Length 27"	6 Lbs./Ctn.
VINRP1231	Length 31"	7 Lbs./Ctn.
VINRP1235	Length 35"	8 Lbs./Ctn.
VINRP1239	Length 39"	8 Lbs./Ctn.
VINRP1243	Length 43"	9 Lbs./Ctn.
VINRP1247	Length 47"	10 Lbs./Ctn.
VINRP1251	Length 51"	11 Lbs./Ctn.
VINRP1255	Length 55"	12 Lbs./Ctn.
VINRP1259	Length 59"	12 Lbs./Ctn.
VINRP1263	Length 63"	13 Lbs./Ctn.
VINRP1267	Length 67"	13 Lbs./Ctn.
VINRP1271	Length 71"	15 Lbs./Ctn.



Colors shown may vary from actual material. Request color samples for true representation.



REGULAR STYLE

VISIT BlueLinx

Standard Open Louvered Shutters

Note: All shutter cartons include 3" painted steel mounting screws & shutter plugs. Shutter touch-up paint available.

Nominal 12" wide High-density copolymer Baked-on acrylic finish 1 pair per carton

Product Specifications		
Product Code	Length	Lbs./Ctn.
VINLV1227	Length 27"	6 Lbs./Ctn
VINLV1231	Length 31"	7 Lbs./Ctn.
VINLV1235	Length 35"	8 Lbs./Ctn.
VINLV1239	Length 39"	8 Lbs./Ctn.
VINLV1243	Length 43"	9 Lbs./Ctn.
VINLV1247	Length 47"	10 Lbs./Ctn.
VINLV1251	Length 51"	11 Lbs./Ctn
VINLV1255	Length 55"	12 Lbs./Ctn.
VINLV1259	Length 59"	12 Lbs./Ctn.
VINLV1263	Length 63"	13 Lbs./Ctn.
VINLV1267	Length 67"	13 Lbs./Ctn.
VINLV1271	Length 71"	15 Lbs./Ctn



Standard Raised Panel Shutters

Note: All shutter cartons include 3" painted steel mounting screws & shutter plugs. Shutter touch-up paint available.

Product Specs: Nominal 15" wide • High-density copolymer Baked-on acrylic finish • 1 pair per carton

CRP* Custom Raised Panel Shutters

Note: All shutter cartons include 3" painted steel mounting screws & shutter plugs. Shutter touch-up paint available. • Custom shutters are built to order and will ship in three (3) working days. Freight is pre-paid on 1 carton of custom shutters.

REGULAR STYLE * COTTAGE STYLE (NOT SHOWN)

Product Specs: Nominal 12" or 15" wide • High-density copolymer Baked-on acrylic finish • 1 per carton • available in lengths from 18" to 96" in 1" increments • Regular Style • Product Code Example: CRP1530 • CRP1530 = CRP + Width + Length • Custom Raised Panel = CRP, Width = 15, Length = 30

VINRP1531 Length 31" 6 Lbs./Ctn. VINRP1535 Length 35" 7 Lbs./Ctn. VINRP1539 Length 39" 8 Lbs./Ctn. VINRP1543 Length 43" 9 Lbs./Ctn. VINRP1547 Length 47" 9 Lbs./Ctn. VINRP1551 Length 51" 10 Lbs./Ctn. VINRP1555 Length 55" 10 Lbs./Ctn. VINRP1559 Length 59" 11 Lbs./Ctn. VINRP1563 Length 63" 12 Lbs./Ctn. VINRP1567 Length 67" 13 Lbs./Ctn. VINRP1567C Length 67"* 13 Lbs./Ctn. VINRP1571 Length 71" 13 Lbs./Ctn. VINRP1575 Length 75" 14 Lbs./Ctn. VINRP1581 Length 81" 15 Lbs./Ctn.

AVAILABLE COLORS



Colors shown may vary from actual material. Request color samples for true representation.

Louvered Shutters



Note: All shutter cartons include 3" painted steel

Standard Open

mounting screws & shutter plugs. Shutter touch-up paint available.

Product Specs: Nominal 15" wide • High-density copolymer Baked-on acrylic finish • 1 pair per carton

CLV* Custom Open Louvered Shutters

Note: All shutter cartons include 3" painted steel mounting screws & shutter plugs. Shutter touch-up paint available. • Custom shutters are built to order and will ship in three working days. Freight is pre-paid on 1 carton of custom shutters.

REGULAR STYLE * COTTAGE STYLE (NOT SHOWN)

Product Specs: Nominal 9", 12", or 15" • Wide high-density copolymer Baked-on acrylic finish • 1 per carton available in lengths from 18" to 96" in 1" increments • Regular Style • Product Code Example: CLV 1530 • CLV 1530 = CLV + Width + Length • Custom Open Louvered = CLV, Width = 15, Length = 30

VINLV1525 Length 25" 5 Lbs./Ctn VINLV1531 Length 31" 6 Lbs./Ctn. VINLV1535 Length 35" 7 Lbs./Ctn. VINLV1539 Length 39" 7 Lbs./Ctn. VINLV1543 Length 43" 8 Lbs./Ctn. VINLV1547 Length 47" 8 Lbs./Ctn. VINLV1551 Length 51" 9 Lbs./Ctn. VINLV1555 Length 55" 11 Lbs./Ctn. VINLV1559 Length 59" 11 Lbs./Ctn. VINLV1563 Length 63" 11 Lbs./Ctn. VINLV1567 Length 67" 12 Lbs./Ctn. VINLV1567C Length 67"* 12 Lbs./Ctn. VINLV1571 Length 71" 12 Lbs./Ctn. VINLV1575 Length 75" 14 Lbs./Ctn. VINLV1581 Length 81" 14 Lbs./Ctn.

3 lbs. per carton



ARCH15RP Raised Panel Arch Top Note: Applies to 15" width shutters only. Product Specs: Nominal 15" wide • High-density copolymer • Baked-on acrylic finish • 1 pair carton



TRANRP15 Raised Panel Transom Top **Note:** Applies to 15" width shutters only. • Nominal **Product Specs:** 15" wide • High-density copolymer Baked-on acrylic finish • 1 pair carton • 3 lbs. per carton



ARCH15LV Open Louvered Arch Top Note: Applies to 15" width shutters only. **Product Specs:** Nominal 15" wide • High-density copolymer • Baked-on acrylic finish • 1 pair carton 3 lbs. per carton



SHUTTRPLUG Fastener Product Specs: 1/4" X 2-5/8" 12 pieces per package



VINITT Painted Steel Replacement Screws Product Specs: 3/16" X 3" • 4 pieces per package .10 lbs. per package



SHTCLP12 Shutter Clips & Anchors Product Specs: 3/16" X 3" • 4 pieces per package .10 lbs. per package



SHUTPAINT Touch-Up Paint Shutters (Bottled with brush) **Product Specs:** 1 oz./plastic bottle • 1 per carton



RED (SK)



WHINESTONE (58)

Colors shown may vary from actual material. Request color samples for true representation.



Mantel Systems

Mantel systems give a home an elegant appearance by adding height and symmetry to the windows and garage doors. Produced in a classic white finish, they can also be painted with a high-quality latex paint for a custom look. Endcaps and keystones add to the grandeur, and are available for siding or brick applications.

Richwood Window Mantels



PLWINMTL36 Window Mantel **Product Specs:** 7-1/4" height • 36" length 6 lbs. per carton • 1 piece per carton White (Paintable)



PLWINMTL40 Window Mantel **Product Specs:** 7-1/4" height • 40" length 7 lbs. per carton • 1 piece per carton White (Paintable)



PLWINMTL44 Window Mantel **Product Specs:** 7-1/4" height • 44" length 7 lbs. per carton • 1 piece per carton White (Paintable)



DTWINMTL36 Window Mantel with Dentil Trim Product Specs: 7-1/4" height • 36" length • 6 lbs. per carton • 1 piece per carton • White



DTWINMTL40 Window Mantel with Dentil Trim **Product Specs:** 7-1/4" height • 40" length 7 lbs. per carton • 1 piece per carton



DENTILSTRIP

KEYSTONE

mantel 120

White (Paintable)

ENDCAP

Mantel System

For use with window mantel

1 lb. per carton • 1 piece per carton

MANTEL120 Long Length

For use with long length mantel system window

1 piece per carton (includes mounting hardware)

(includes styrene adhesive) • White (Paintable)

Product Specs: 7-3/8" face height • 120" length Plain cover strip: 1" height • .139" thickness

120" length •1 mantel system carton 15 lbs. per

1- mantel (120"), 1- plain cover strip, (120"),

16-(8) anchors and (8) screws/washers

carton • White (Paintable) Mantel System includes:

Product Specs: 7-1/2" height • 7" top width 4-3/4" bottom width • 1 lb per carton

For use with window mantel and long length mantel system

Product Specs: 1" height • 60" length • 2 lbs. per carton 2 pieces per carton • White (Paintable)



DTWINMTL44 Window Mantel with Dentil Trim **Product Specs:** 7-1/4" height • 44" length 7 lbs. per carton • 1 piece per carton



KEYSTONE

For use with window mantel Product Specs: 8-3/4" height • 7-3/4" length 1 lb. per carton •1 piece per carton White (Paintable)

White (Paintable)

White (Paintable)

(Paintable)





Dentil Mouldings

For a finishing touch, dentil mouldings highlight rooflines, frieze trim, soffit, and siding, creating an opulent profile. Richwood's mouldings look like wood, but perform better. They stand up to any kind of weather, and do not crack, split, fade, or warp, making them virtually maintenance-free.

Richwood Designer Accents

SDGENDCAP Siding Endcaps	Product Specs: 7-3/8" height • 3-1/4" width • 2 lbs. per carton 2 pieces per carton • (includes styrene adhesive) White (Paintable)
BRKENDCAP Brick Endcaps	Product Specs: 7-3/8" height • 3-1/4" width • 2 lbs. per carton 2 pieces per carton • (includes styrene adhesive) White (Paintable)
PEDIMENTST Pediment Set	Product Specs: 12-3/4" pediment height • 18-1/2" overall height 8 lbs. per carton • 1 piece per carton • White (Paintable)
MANTEL Door Surround Mantel	Product Specs: 58" length • 1 lb. per carton 8 pieces per carton • White (Paintable)
	Product Space , 10, 1/2" length • 6 lbs, par carton • 6 pieces per



MANTELOVLY Door Mantel Overlay **Product Specs:** 10-1/2" length • 6 lbs. per carton • 6 pieces per carton • White (Paintable) • For use with door surround mantel

95

Door Surrounds

Richwood's door surround systems welcome guests with a stately entrance. They can be sized to fit most standard entrances, including 96" or 144" heights, and are made from highly durable polystyrene that withstands wear and tear. Richwood's broad selection of door surround systems includes pilasters and mantel or pediment with urn overlays. They are available in classic white, but can be painted to match the style of any home.



96

CALL BlueLinx • AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

Richwood Designer Accents



TOPCAP Pilaster Cap

Product Specs: 1 lb. per carton • 1 piece per carton White (Paintable)



BASECAP Pilaster Base

Product Specs: 1 lb. per carton \bullet 1 piece per carton White (Paintable)



PILASTER96 Pilaster Set

Product Specs: (2 Pilasters, 6 Mounting Clips, 2 Pilaster Caps, 2 Pilaster Bases) • 7-1/2" width • 1 pair per carton • 96" height



PILASTER144 Pilaster Set

Product Specs: (2 Pilasters, 6 Mounting Clips, 2 Pilaster Caps, 2 Pilaster Bases) • 7-1/2" width • 1 pair per carton • 144" height 20 lbs. per carton • White (Paintable)



DENTILMD45 4-1/2" Dentil Moulding Built-In Soffit J-Channel **Product Specs:** 12' length • 50 lbs. per carton • 10 pieces per carton solid PVC • See color matrix



Ply Gem Stone

Ply Gem Stone offers a fresh approach to building design. Modeled directly from nature, this stone veneer product line is a contemporary and attractive alternative to solid rock and stucco, and complements traditional siding in exterior applications. Its rustic looks can also add warmth and charm to home and building interiors, where it can be used to highlight fireplaces, columns, and other architectural and structural details. Ply Gem provides the nation's residential builders, remodelers, and architects with access to a comprehensive range of building products for new construction, repair, remodel and replacement, windows, doors, siding, stone veneer, and fencing and railing products. Ply Gem Stone stands behind its full line of quality stone veneer products by offering a 50-year limited warranty, one of the industry's best.

Fieldstone

A modest arrangement inspired by a selection of traditional stone varieties, Fieldstone offers a casual mosaic of irregular shapes, hues, and textures that merge to create a quaint homegrown character. The beauty of the Fieldstone collection is in the rugged informality offered by each stone variety, and the way these imperfect stones unite to create a perfectly unique veneer. Like a puzzle, the stones fit together succinctly and complement one another's naturally inspired edges.

BUFF

GLEN ROCK

MILLHEIM









COLUMBIA



HONEY





AUTUMN

EARTHTONE



LEHIGHTON





BUCKINGHAM

EASTON

LIMESTONE

SHERWOOD

CHARDONNAY



GRAY



омана



TIOGA





HAMPTON



PA LIME



WASCO

SHELBY





Ply Gem Stone Veneer — Stocked Items Mortar Joints

Cut Cobblestone

ITEM # DESCRIPTION

103622 Cut Cobblestone Flat ABERDEEN 103744 Cut Cobblestone Flat AUTUMN 103877 Cut Cobblestone Flat CHARDONNAY 114718 Cut Cobblestone Flat HONEY 114843 Cut Cobblestone Flat SHERWOOD 114636 Cut Cobblestone Flat WINFIELD 102798 Cut Cobblestone Corner ABERDEEN 114454 Cut Cobblestone Corner AUTUMN 103127 Cut Cobblestone Corner CHARDONNAY 114546 Cut Cobblestone Corner HONEY 114607 Cut Cobblestone Corner SHERWOOD 114628 Cut Cobblestone Corner WINFIELD

Fieldstone

ITEM # DESCRIPTION

- 104645 Fieldstone Flat CHARDONNAY 115260 Fieldstone Flat COLUMBIA 115329 Fieldstone Flat HONEY
- 115384 Fieldstone Flat OMAHA
- 104796 Fieldstone Flat SHENANDOAH
- 104446 Fieldstone Corner AUTUMN
- 104469 Fieldstone Corner CHARDONNAY
- 114952 Fieldstone Corner COLUMBIA
- Fieldstone Corner HONEY 115009
- 115094 Fieldstone Corner OMAHA
- 104562 Fieldstone Corner SHENANDOAH

Tuscan Fieldstone

ITEM # DESCRIPTION

- 116633 Tuscan Fieldstone Flat PENNS VALLEY 116644 Tuscan Fieldstone Flat SHENANDOAH Tuscan Fieldstone Corner PENNS VALLEY 116555
- 116580 Tuscan Fieldstone Corner SHENANDOAH

Riverstone

ITEM # DESCRIPTION

116127 Riverstone Flat EARTHTONE 116147 Riverstone Flat MIDWEST 116172 Riverstone Flat SHADE MOUNTAIN 116031 Riverstone Corner EARTHTONE 116060 Riverstone Corner MIDWEST 116085 **Riverstone Corner SHADE MOUNTAIN**

Dry Stack

Shadow Ledgestone

ITEM # DESCRIPTION

- 105346 Shawdow Ledgestone Flat ABERDEEN
- 116371 Shawdow Ledgestone Flat BUCKINGHAM
- 105395 Shawdow Ledgestone Flat CHARDONNAY
- 105395 Shawdow Ledgestone Flat HONEY
- 105465 Shawdow Ledgestone Flat SHENANDOAH
- 116462 Shawdow Ledgestone Flat SHERWOOD
- 105202 Shawdow Ledgestone Corner ABERDEEN
- 116224 Shawdow Ledgestone Corner BUCKINGHAM
- 105265 Shawdow Ledgestone Corner CHARDONNAY
- 116248 Shawdow Ledgestone Corner HONEY
- 105318 Shawdow Ledgestone Corner SHENANDOAH
- 116303 Shawdow Ledgestone Corner SHERWOOD

Ledgestone

ITEM # DESCRIPTION

- 115888 Ledgestone Flat SHADE MOUNTAIN
- 115655 Ledgestone Corner SHADE MOUNTAIN

Ridgestone

ITEM # DESCRIPTION

- **Ridgestone Flat CHARDONNAY** 116007
- 116012 **Ridgestone Flat HONEY**
- 115955 Ridgestone Corner CHARDONNAY
- 115960 **Ridgestone Flat Corner HONEY**

Installation Instructions

Step 1: Install the Weather Resistive Barrier (WRB) (if necessary) Step 2: Install the Metal Lath (if necessary) Step 3: Mix the Mortar Step 4: Apply the Scratch Coat Step 5: Shape the Stone (if necessary) Step 6: Mix the Mortar Step 7: Wet the Veneer Step 8: Apply Mortar to the Stone Step 9: Apply the Stone (hands must be clean) Step 10: Grout Step 11: Clean Step 12: Flash

Please see full installation instructions at www.plygemstone.com.

Tuscan Fieldstone

Perhaps revealing the most unique patterns of Ply Gem Stone's collections, Tuscan Fieldstone features a rustic surface combined with the look and feel of old world craftsmanship.







PENNS VALLEY



SHENANDOAH



AUTUMN TUSCAN FIELDSTONE

Shadow Ledgestone

Molded directly from an old Civil War fence row, eye-catching Shadow Ledgestone variety reveals the look of tailored stacked stone with the added flamboyance of serrated edges. Organized closely atop one another, Shadow Ledgestones fashion a bold facade resulting from the dynamic interplay of surface stone, crags, and spaces. Structured similarly to nature, Shadow Ledgestone can lend a unique horizontal balance to your living or working environment.



BRADFORD





BUCKINGHAM



CHARDONNAY



ABERDEEN

EARTHTONE







EASTON



SHENANDOAH



AUTUMN



HAMPTON



Colors shown may vary from actual material. Request color samples for true representation.

SHADE MOUNTAIN

SHERWOOD

HONEY





SIDIN<u>G & TRI</u>M

Ledgestone

The flat, smooth edges of the Ledgestone design provide a clean and modern look. With the appearance of structured simplicity, the randomly stacked stones add visual depth and texture that will complement your living environment for years to come.







AUTUMN







BUFF





CHARDONNAY

EASTON



CHARDONNAY SHADOW

SHADE MOUNTAIN

SHERWOOD

Ridgestone

Stacked similar to Ledgestone, Ridgestone offers the added subtlety of rippled edges. Modeled to appear as if water has washed over the surface, Ridgestone captures nature's true nuances and the appeal of natural rock formation. A universal variety, Ridgestone offers the consistency of horizontal balance with the irregularity of unique textures.











SHADE MOUNTAIN

Riverstone Identified by its shiny appearance and smooth shape, the Riverstone is an appropriately popular choice for both interior and exterior designs. Available in a variety of earthy tones, the Riverstone reflects a distinctive, but unpretentious appeal. Note that because Ply Gem Stone is crafted to mirror nature's most sincere variations, inconsistencies in stone hue and texture can be expected.









HONEY



SHADE MOUNTAIN

BUFF EARTHTONE GRAY I Colors shown may vary from actual material. Request color samples for true representation.

MIDWEST



Cobblestone

An alternative to Ply Gem Stone's Cut Cobble variety, Cobblestone offers a more refined oldworld style stone with smooth texture and predictable edges. Available in seven unique hues, Cobblestone reflects a one-of-a-kind style that's equally at home in any design.



BUFF





MILLHEIM





Cut Cobblestone

BUCKINGHAM

Invite classic European elegance into your home or business with Cut Cobblestone. This beautiful profile mirrors the old-world style of Europe's traditional cobblestone streets. Each hue and texture is carefully chosen to resemble the unique qualities of natural stone, and is finished using a process that records nature's unique surface inconsistencies. With numerous varieties to choose from, this nostalgic stone is sure to give your new or existing building an historical flair.



ABERDEEN



FASTON

PA LIME

102







GRAY





HONEY



BUCKINGHAM







CHARDONNAY



LEHIGHTON





MILLHEIM





SHADE MOUNTAIN



Colors shown may vary from actual material. Request color samples for true representation.









CALL BlueLinx AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY



AUTUMN



Brick

Lightweight and easy to install, Ply Gem Stone's Bricks are nearly half the depth of standard bricks, but with the same charming appearance. As the weight of Ply Gem Stone eliminates the need for wall ties or footings, manufactured stone is about one-third to one-half the cost of natural stone. Perfect for indoor or outdoor installations, brick veneer is a preferred alternative to traditional brick and is available in an extensive selection of colors, and in 1" or 2" thickness.









CHESTER COLONIAL CLARION COLONIAL FULTON COLONIAL MONROE COLONIAL Colors shown may vary from actual material. Request color samples for true representation.



TUSCAN FIELDSTONE PENNS VALLEY WITH BRICK ACCENTS

Stone Accessories

All accessories are available in Brown, Country, Cream, and Lime.









BROWN COUNTRY CREAM LIME Colors shown may vary from actual material. Request color samples for true representation.



Capstone 12" X 19"



 Tapered Capstone

 14" X 9" and 14" X 32"



Hearthstone



Trim Stone 7" X 11"



Quoin Corner 6"D X 7"H X 12"L



Shutter Block 3"D X 3"H X 14"L

Keystone



Soldier 5" X 9" and 6" X 8"



Date/Address Stone 7.25" X 11.5"

5" Base, 10.5" Height, 9" Top



Tapered Sill 3"D X 3.25"H X 18"L and 3"D X 3.25"H X 24"L



Mantel Bracket 3.5" Base, 8.5" Height, 3.25" Top

Electrical Block 8" X 8" and 8" X 12"

See Page 106 for stocked items

Brick Accessories



Brick Corner 3.75" X 7.5"



Monroe Brick Sill 2.5"D X 3"H X 18.5"L



Colonial Brick 1" or 2"

105



Ply Gem Stone Veneer — Stocked Items

Λ	\sim	$\sim \circ$	C	20	r 1/	es
	_			50		

BROWN ITEM #	COUNTRY ITEM #	LIME ITEM #	DESCRIPTION
105501	105534	105552	14" SHUTTER BLOCK
105575	105615	105643	24" WINDOW SILL
105689	105721	105735	6"x8" LARGE SOLDIER
117184	117195	117216	TRIM STONE
104182	104287	104309	ELECTRIC BOX W/ BOX
116774	116784	116850	19"x19" HEARTHSTONE
104825	104885	104946	KEYSTONE
116898	116918	116947	QUOIN CORNER
104983	105046	105110	CAPSTONE
105131	105158	105182	MANTEL BRACKET
124490	124490	124490	SAKRETE STONE VENEER MORTAR #80
715169	715169	715169	2.5 27"x96" METAL LATH

Cream Accessories available by special order



106



STRUCTURAL FRAMING PRODUCTS

SPECIALTY LUMBER & FLOORING

METAL RODUCT

SIDING & TRIM

ROOFING

INSULATION

۲

We referred to the second seco

Over 70,000 different ways.

Call BlueLinx and gain access to the industry's leading selection of building products – more than 70,000 SKUs!

Lower your storage and transportation costs by ordering quantities that fit your needs. Receive express turnaround time on all orders. Get the customer service our seasoned professionals are known for.

Sales: 888-502-BLUE • www.BlueLinxCo.com



BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. @2010 BlueLinx Corporation. All rights reserved.

OTHER BUILDING

۲

MOULDING & MILLWORK

LET BLUELINX BE YOUR WAREHOUSE

UMBER (

SULATIO

ROOFIN

۲

۲

Our warehouse pulls in on request.

Just-in-time inventory.

When you order inventory from BlueLinx, it's like having your very own

warehouse. But without the messy overhead.

Order exactly what you need – whether it's a job lot quantity to optimize inventory levels or a full truckload to meet high-volume needs.



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

()

Metal Products

Rebar and Remesh
Concrete Accessories
Metal Studs & Strapping
Metal Connectors
Metal Roofing & Siding
Fasteners



A BlueLinx PORTFOLIO BRAND

SteelLinx is a comprehensive line of metal building products — from fasteners to fencing to roofing materials. With SteelLinx, you get the finest quality metal products with the same dependable BlueLinx service you've come to know and trust. Get the metal building products you need and reduce the stress associated with dealing with too many vendors!

From wire products to fence products, you can count on SteelLinx to meet all of your agricultural metal needs. BlueLinx offers a wide selection of SteelLinx nails, screws, staples, and collated fasteners in a variety of types, sizes, and finishes for virtually any application. Additionally, SteelLinx collated fasteners can be used in virtually any brand of tool and are labeled with handy cross-reference information. Looking for light-gauge steel framing products, including metal studs and track, metal flashings, roof trims, soffits, and fascia? How about metal connectors? Whether your customers are looking for joist hangers, rafter ties, plywood clips, or wall ties, SteelLinx also carries the connector products you need.



10 C

Contents

112 Rebar

Reinforcing bar, or rebar, is a hot rolled steel product used primarily for reinforcing concrete structures. Meeting ASTM specifications, rebar grades are available varying in yield strength, bend test requirements, and composition.

114 Remesh

Remesh (welded wire reinforcing fabric) provides uniform stress distribution and more effective crack control in slabs and walls. The ease and speed with which remesh can be installed typically save valuable installation time and costs. Available in sheets and rolls, remesh reduces the number and size of cracks in concrete, permits the use of larger panels for more coverage.

118 Concrete & Forming Accessories

Today's pouring methods demand products that will stand the test of time. From brackets and wedges to concrete surface treatments and masonry deck control, BlueLinx offers a huge inventory of concrete and forming accessories. Purchase your special application hardware and essential extras in one place and get it right starting with the first pour.

130 Metal Studs, Framing, and Strapping

132 Metal Connectors

134 Roofing

From tool sheds to residential homes to industrial warehouses, metal is becoming the material of choice for many roofing and siding applications. Metal roofs are favored for their fire-resistant qualities, longevity, and speed of installation. They are also surprisingly lightweight. For KenLoc, MechLoc, StayLoc, and FastPanels, look no further.

138 Metal Accessories

Metal is cut using aviation snips, which means no sawdust! Check out our line of flat steel strapping, which includes the full range of regular-duty, high tensile, and heavy-duty products. Add nails, screws, bolsters, bar supports, stakes, chamfer strips, and more.

141 Metal Fasteners

One of the best ways to attach walls, floors, and roof structures directly to the house's foundation is to use metal connecting plates and anchors, along with approved structural nails. Choose from numerous easy-to-install metal connectors that allow you to quickly bolt floors and walls to the foundation and then connect every other major section.





Metals to meet all needs

SteelLinx Rebar

Your reinforcements are here.

As the nation's largest purchaser and distributor of rebar and remesh, at BlueLinx we connect you to one of the most comprehensive lines of concrete forming, fabrication, construction products, and accessories. Reinforcing bar, or rebar, is a hot-rolled steel product used primarily for reinforcing concrete structures. Meeting ASTM specifications, rebar grades are available varying in yield strength, bend test requirements, and composition.

Rebar - Grade 40

ITEM #	Bar #	SIZE
138629	#3	3/8" X 20
158304	#4	1/2" X 20
142517	#5	5/8" X 20
138629	#10M	#3-3/8' X

DESCRIPTION 0" 0' 0'

GRADE 40 REINFORCING BAR GRADE 40 REINFORCING BAR GRADE 40 REINFORCING BAR (20' GRADE 40 (GR300) REBAR

Rebar - Grade 60

ITEM #	Bar #	SIZE
174810	#3	3/8" X 20'
121376	#4	1/2" X 20'
197185	#5	5/8" X 20'
120727	#6	3/4" X 20'
174810	#10M	#3-3/8' X 20

DESCRIPTION

GRADE 60 REINFORCING BAR GRADE 60 REINFORCING BAR GRADE 60 REINFORCING BAR GRADE 60 REINFORCING BAR O' GRADE 60 (GR420) REBAR

Cut-to-size Rebar

ITEM #	Bar #	SIZE
106977	#3	3/8" X 10'
113419	#4	1/2" X 10'
182478	#5	5/8" X 10'

DESCRIPTION

CUT-TO-SIZE REINFORCING BAR
CUT-TO-SIZE REINFORCING BAR
CUT-TO-SIZE REINFORCING BAR

Rebar Pins

		A COLUMN TO A COLUMN	THE REAL PROPERTY AND ADDRESS OF THE PARTY O
ITEM #	Bar #	SIZE	DESCRIPTION
140465	#3	3/8" X 24"	REBAR PINS
542092	#4	1/2" X 12"	REBAR PINS
317619	#4	1/2" X 18"	REBAR PINS
542103	#4	1/2" X 24"	REBAR PINS
125795	#4	1/2" X 48"	REBAR PINS



Grade 300 / Grade 40

Due to lower carbon content, grade 300 is easier to bend.

Typical applications: Residential construction

Grade 420 / Grade 60

Used in high stress rated applications, higher carbon content provides increased vertical strength.

THEFT

THUL PLUS AND DOLL

and the second second

Typical applications: Dams, atomic power stations, or commercial buildings

No-Grade

No-grade rebar is not tested as it is rolled. Cannot be used in applications where mill certified products are required.

Typical applications: Sidewalks, driveways,

or other flat pours

ASTM Specifications ASTM A 615

Deformed and plain billet steel bars for concrete reinforcing. Grades 300 (40) and 420 (60).

Reinforcing bars manufactured to meet ASTM A 615, A 616, A 617, A 706 and are subject to availability.

Identification

н

Ш

₩

Grade 300 (40)

VISIT BlueLinx

Every mill uses its own identification pattern to differentiate its rebar from another. The following illustrates how to read rebar identification.

Metric	Bar	Nominal		Weight	Weight
Size	Number		Per Ft.	Per 20'	
				(lbs.)	(lbs.)
10	#3	3/8"	(.3759)	.376	7.52
13	#4	1/2"	(.5009)	.668	13.36
16	#5	5/8"	(.6259)	1.043	20.86
19	#6	3/4"	(.7509)	1.502	30.04
22	#7	7/8"	(.8759)	2.044	40.88
25	#8	1"	(1.0009)	2.670	53.40
29	#9	1-1/8"	(1.1289)	3.400	68.00
32	#10	1-1/4"	(1.2709)	4.303	86.06
36	#11	1-3/8"	(1.4109)	5.313	106.26
43	#14	1-3/4"	(1.6939)	7.650	153.00
57	#18	2-1/4"	(2.2579)	13.600	272.00

Cut-to-Size Rebar


Cut-to-size rebar has a variety of applications. It can be used for concrete reinforcement, construction stakes, landscaping projects, or tree and vegetable stakes.


Lengths	Bar Diameter
Available	(inches)
12"	3/8, 1/2
18"	3/8, 1/2
24"	3/8, 1/2, 5/8
48"	3/8, 1/2, 5/8
6'	3/8, 1/2, 5/8
8'	3/8, 1/2, 5/8
10'	3/8, 1/2, 5/8



Line System—Grade Marks Kev $\mathbf{N} = \text{New Billet}$ $\mathbf{A} = Axle$ Main Main н Ribs Ribs I = Railн Initial of Initial of One $\mathbf{W} = \text{Low Alloy}$ н Producing Mill **Producing Mill** Line н Bar Size #11 Bar Size #11 Grade N Grade Type Steel Type Steel N Marks (New Billet) (New Billet) Mark Grade 420 (60)

• Variations: Bar identification marks may also be oriented to read horizontally. (At 90° to those illustrated above.) Grade mark lines must be continued at least five deformed spaces. Grade mark numbers may be placed within separate consecutive deformation spaces to read vertically or horizontally.





•						
•••	АТ	WWW.BLUELINXCO.COM	FOR	ADDITIONAL	PRODUCT	LITERATURE


SteelLinx Remesh

Stress distribution

Remesh provides uniform stress distribution and more effective crack control in slabs and walls to hold reinforcing steel in position until the concrete is poured and set. All metal bar supports are manufactured to meet or exceed the recommendations of the Concrete Reinforcing Steel Institute (CRSI). The ease and speed with which remesh can be installed typically saves valuable installation time and costs. Available in sheets and rolls, remesh reduces the number and size of cracks in concrete and permits the use of larger panels for more coverage.

Remesh

ITEM #	SIZE	DESCRIPTION
198781	6 X 6 - 10/10 - 5' X 50'	MESH ROLLS W1.4 X W1.4
172183	6 X 6 - 10/10 - 5' X 150'	MESH ROLLS W1.4 X W1.4
228230	6 X 6 - 10/10 - 8' X 15'	MESH SHEETS
238200	6 X 6 - 6/6 - 8' X 15'	MESH SHEETS
189314	6 X 6 - 10/10 - 5' X 10'	MESH SHEETS W1.4 X W1.4
361682	6 X 6 - 10/10 - 4' X 7'	MESH SHEETS W1.4 X W1.4
737624	6 X 6 - 10/10 - 42" X 84"	MESH SHEETS W1.4 X W1.4 UPC

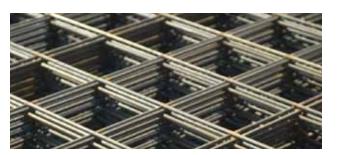

Info Corner: Concrete Columns

Concrete columns may be reinforced with longitudinal bars and ties (tied columns) or with longitudinal bars and spiral steel (spiral-reinforced columns). Sometimes the columns may be a composite of structural steel of cast iron and concrete. Concrete columns that aren't reinforced are seldom used because of transverse tensile stresses and the possibility of longitudinal tensile stresses being induced by buckling or unanticipated bending. Because concrete is weak in tension, such stresses are generally avoided. When plain concrete columns are used, they usually are limited in height to five or six times the least thickness. In reinforced concrete, steel is embedded in such a manner that the two materials act together in resisting forces. The reinforcing steel – rods, bars, or mesh – absorbs the tensile, shear, and sometimes the compressive stresses in a concrete structure.



Physical Requirements for Standard ASTM Deformed Reinforcing Bars

Size – Nos. Inclusive Billet Steel A	Grade	Tensile Strength Min., PSI Steel & ASTM Spec.	Yield (a) Min., PSI No.)	Elongation in 8" (%)	Cold Bend Pin (d) (d=nominal diameter)
3-11	40 300	70,000	40,000	#3 #7	Under size #6 4d #6 and larger 5d
3-11 14, 18	60 420	90,000	60,000	#3 #4 #5 #66 #7 #88 #9 #10 #11 #14 #187	Under size #6 49 #6 and larger 5d #7 #8 6d #9 #10 #11 8d (b) #14 #18 10d (90o)
Rail Steel (Ty	pe of Steel & .	ASTM Spec. No.)			
3-11	60 420	90,000	60,000	#3 #4 #5 #66 #75 #8 #9 #10 #114.5	Under size #6 4d #6 and larger 5d
Axle Steel (Ty	pe of Steel & .	ASTM Spec. No.)			
3-11	40 300	70,000	40,000	#3 #7. 11 #4 #5 #6 12 #8 10 #9 9 #10 8 #11 7	Under size #6 4d #6 5d
3-11	60 420	90,000	60,000	#3 #4 #5 #614 #8 #9 #10 #117	Under size #6 4d #65d #7 #86d #9 #10 #11 8d
Low Alloy Ste	el (Type of Ste	eel & ASTM Spec. N	lo.)		
3-11 300	60	80,000 (e)	60,000 (f)	#3 #4 #5 #6 14 #7 #8 #9 #10 #11 12 #14 #18 10	Under size #6 3d #6 #7 #8 4d #9 #10 #11 6d #14 #18 8d

(a) Yield point or yield strength. See specifications. (b) Under supplemental requirements of A 615 only. (c) Complete specification for Rail Steel A 616, Axle Steel A 617, and Low Alloy Steel A 706 reinforcing bars can be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103. Chart courtesy of Concrete Reinforcing Steel Institute. (d) Test bends 180° unless noted otherwise. (e) Tensile strength shall not be less than 1.25 times the actual yield strength (A 706 only). (f) Maximum yield strength 78,000 psi (A 706 only).

Remesh

Remesh (welded wire reinforcing fabric) can be used in concrete columns and confinement ties in bridge girders and railings, retaining walls, decks, highway paving overlays, and median barriers. In other residential and commercial projects, remesh is used in architectural panels, beams, and tees for floors, deck structures, and parking structures. Review the specification information we've provided to determine where your project fits in.

ASTM Specifications

- **ASTM A 82:** Cold drawn steel wire for concrete reinforcement
- > ASTM A 185: Welded steel wire fabric for concrete reinforcement
- **ASTM A 496:** Deformed steel wire for concrete reinforcement
- ASTM A 497: Welded deformed steel wire for concrete reinforcement
- **Nomenclature:** ASTM minimum properties of steel wire in welded wire fabric

IDENTIFICATION

INDUSTRY METHOD OF DESIGNATING STYLE

EXAMPLE: 6 X 12 - W16 X W8

Type	Yield of Strength	Tensile Strength	Weld Shear Strength
Steel Wire Stats	(psi)	(psi)	(psi)
Welded Smooth	65,000	75,000	35,000
Deformed Welded	70,000	80,000	35,000

Source: Wire Reinforcement Institute Tech Facts TF-501

Style Designation Number

Design by	Design by Wire	Steel Area (sq	. in. per ft.)	Approx. Weight
W-Number(a)	Gauge	Longitudinal	Transverse	(lbs.) per 100 sq. ft.
Rolls				
6 x 6 - W1.4 x W1.4 6 x 6 - W2.0 x W2.0 6 x 6 - W2.9 x W2.9 6 x 6 - W4.0 x W4.0 4 x 4 - W1.4 x W1.4 4 x 4 - W2.0 x W2.0 4 x 4 - W2.9 x W2.9 4 x 4 - W4.0 x W4.0	$6 \times 6 - 10 \times 10$ $6 \times 6 - 8 \times 8(b)$ $6 \times 6 - 6 \times 6$ $6 \times 6 - 4 \times 4$ $4 \times 4 - 10 \times 10$ $4 \times 4 - 8 \times 8$ $4 \times 4 - 6 \times 6$ $4 \times 4 - 4 \times 4$.028 .040 .058 .080 .042 .060 .087 .120	.028 .040 .058 .080 .042 .060 .087 .120	21 29 42 58 31 43 62 85
Sheets				
6 x 6 - W1.4 x W1.4 6 x 6 - W2.9 x W2.9 6 x 6 - W4.0 x W4.0 6 x 6 - W5.5 x W5.5 4 x 4 - W4.0 x W4.0	$6 \times 6 - 10 \times 10$ $6 \times 6 - 6 \times 6$ $6 \times 6 - 4 \times 4$ $6 \times 6 - 2 \times 2(c)$ $4 \times 4 - 4 \times 4$.028 .06 .08 .11 .12	.028 .06 .08 .11 .12	21 42 58 80 86

(a) W=number = Cross-sectional area of the wire (b) Exact W-number for 8-gauge is W2.1. (c) Exact W-number for 2-gauge is W5.4.



PC Strand: Seven-Wire Prestressing Strand

Grade	Nominal Stand Diameter	Minimum Breaking Strength Ibs kgs	Minimu Yield St at 1% Ibs	trength kgs	Minimum Elongation at 24" Gauge Extension	Nomina Area In² mn		Nomina Weight Ibs/ 1000ft	al kg/ 1000m
ASTM A	416: Seven-Wi	ire Uncoated Str	and (low relax	ation)					
OFOK	3/8"	23,000 10,433	3 20,700	9,389	3.5%	0.085	54.84	290	432
250K	7/16"	27,000 12,24	7 24,300	11,022	3.5%	0.108	69.68	367	548
	7/16"	31,000 14,06	1 27,900	12,655	3.5%	0.115	74.19	390	582
0704	1/2"	41,300 18,733	3 37,170	16,860	3.5%	0.153	98.71	520	775
270K	1/2" HBS	45,000 20,408	3 40,500	18,368	3.5%	0.165	106.45	563	837
	0.6"	58,600 26,580) 52,740	23,922	3.5%	0.217	140.00	740	1,102

Relaxation Properties

....


Relaxation Prop	erties for All Uncoated Strand
Initial Stress	Maximum Relaxation after 1000 hours (low relaxation strand)
70% G.U.T.S.	2.5%
80% G.U.T.S.	3.5%



SteelLinx Concrete Accessories

Meeting your needs

Do you need tools and equipment for cement pouring, brick or wall anchoring, masonry deck control, patch and repair systems, or concrete surface treatments? Whether a mixing solution like spec film concentrate or surface retarder, a tool such as a stainless edger, or the final fastening like a stud anchor or threaded stud, BlueLinx offers a huge inventory of concrete accessories.

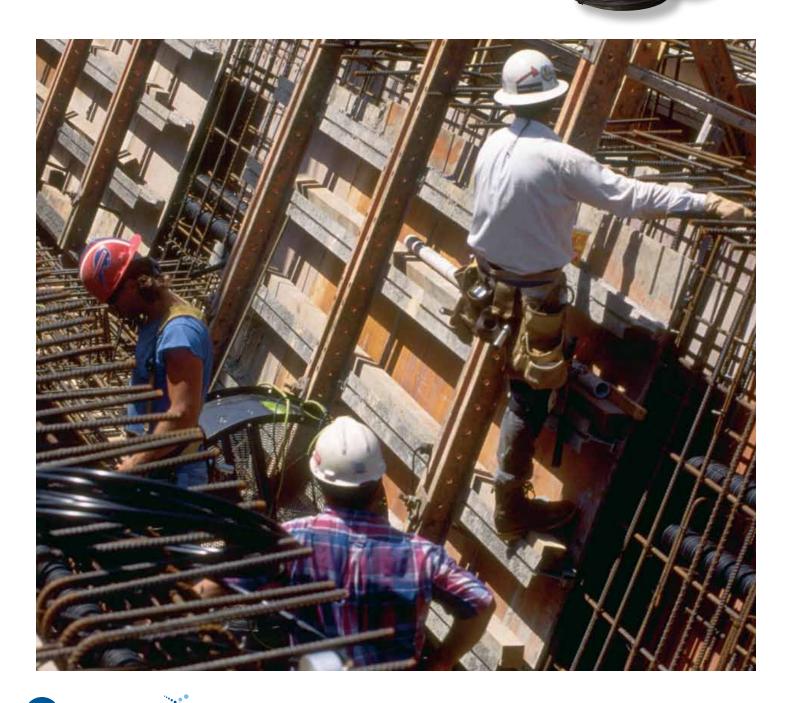



120 Bar Supports – Metal

Designed to hold reinforcing steel into position until the concrete is poured and set, all metal bar supports are manufactured to meet or exceed the recommendations of the Concrete Reinforcing Steel Institute (CRSI).

124 Bar Supports - Plastic

With no exposed metal tips, eliminating the possibility of rust after grinding, plastic bar supports are manufactured to strict tolerances. Plastic bar supports are manufactured from recycled resins and available in various shapes to serve the same purpose as wire bar chairs, which BlueLinx also offers.

126 Reinforcing Accessories & Forming Products

Completion of a large-scale construction project on budget and on time may come down to the last accessory. Whether an anchor bolt, loop tie increment or bundle wire, BlueLinx can help you check off the final item.

128 Stakes, Expansion Joints/Zip Strips/Chamfer Strips

Versatile, resilient, flexible and non-extruding, most expansion joints will not deform, twist, or break with normal on-the-job handling. Stakes, expansion joints, zip strips, and chamfer strips can be used for mammoth projects such as highways, streets, airport runways, sidewalks, and driveways. BlueLinx knows what you need for residential, commercial and industrial applications, and our product offerings reflect that mission.

129 Site Accessory Products

Behind our extensive inventory of site accessory products and thousands of other category offerings, you'll find expert staff that have been educated and trained to service the needs of our customers in the ever-changing construction industry. As the market shifts, BlueLinx is here to ensure your job site runs like clockwork with products that are manufactured by the brands you trust.











Bar Supports - Metal

Designed to hold reinforcing steel into position until the concrete is poured and set, all metal bar supports are manufactured to meet or exceed the recommendations of the Concrete Reinforcing Steel Institute (CRSI).

Symbol	Item Name	Photo	Application	Height (inches)
	Bolsters			
BB	Beam Bolster Single	nn	Single mat and lower mats of steel In 1/4" increments	3/4" to 5"
BBU	Beam Bolster Upper	J.J.S.S.	Support lower steel on fill or 3/4" to 5" subgrade / successive mats of steel	3/4" to 5"
Slab B	olster			
SB	Slab Bolster	and the	Single mat or for lower mats of steel In 1/4" increments	3/4" to 3"
SBP	Slab Bolster with Plate	TIA	Support lower mats of steel on fill or subgrade In 1/4" increments	3/4" to 3"
SBU	Slab Bolster Upper/Runner		Support upper mats of steel & lower steel on fill or subgrade In 1/4" increments	3/4" to 3"
Contin	uous High Chairs			
СНС	Continuous High Chairs	M	Support for lower mats of steel	2" to 12"
СНСИ	Continuous High Chair Upper	DAY	Supporting an upper level of steel In 1/4" increments	2" and up

*Wire gauges shown are for standard non-stainless steel material.

When ordering metal bar supports, specify:

Туре Quantity

Height

Class

Class 1

Plastic protected dipped or tipped

Class 2 Epoxy coated

Class 3

- Plain wire, no protection
- Galvanized
- Stainless steel

Centers (inches)	Top Wire (Gauge)*	Plate/Runner (Gauge)	Legs (Gauge)*	Length (feet)	Options	Packaged
2-1/2"	4 ga.	N/A	4 ga.	5'	Under 2" height may be supplied in 7 ga.	100 If/bundle
2-1/2"	4 ga.	4 ga.	4 ga.	5'	Under 2" height may be supplied in 7 ga.	50 If/bundle
5"	4 ga.	N/A	6 ga.	5'	N/A	100 If/bundle
5"	4 ga.	N/A	6 ga.	5'	N/A	100 lf/bundle
5"	4 ga.	7 ga.	6 ga.	5'	N/A	50 If/bundle
7-1/2"	2 ga.	N/A	4 ga. up to 5"	5'	Taller sizes available upon request	100 If/bundle
7-1/2"	2 ga.	4 ga.	4 ga. up to 5" 2 ga. 5" to 9"	5'	N/A	50 If/bundle



Continued from previous page

Bar Supports – Metal

Designed to hold reinforcing steel into position until the concrete is poured and set, all metal bar supports are manufactured to meet or exceed the recommendations of the Concrete Reinforcing Steel Institute (CRSI).

Symbol	Item Name	Photo	Application	Height (inches)
Individua	al High Chairs			
нс	Individual High Chairs	M	Support upper steel or single mats in 1/4" increments	2" and up
НСР	Individual High Chairs with Plate	AM	Support slab steel on soil or subgrade	2" and up
Chairs				
BC	Bar Chairs	X	Provides appropriate concrete cover for reinforcing bar	3/4", 1", 1-1/4", 1-1/2", 1-3/4"
JC	Joist Chairs	my my	Used in the ribs joist or grid type slabs & accommodate two lower bars / manufactured for joist widths	3/4", 1", 1-1/4", 1-1/2", 4", 5" and 6" 1-3/4"
RC	Rod Chair Tall		Economical support for footings and light steel applications 2/12 (2 bars, 12" footing)	3-1/2"
RC	Rod Chair Short		3/16 (3 bars, 16" footing)	6"-8"
RC	WPC		3/20 (3 bars, 20" footing)	8"-10"

*Wire gauges shown are for standard non-stainless steel material.

When ordering metal bar supports, specify:

Туре Quantity

Height

Class

Class 1

Plastic protected dipped or tipped

Class 2 Epoxy coated

Class 3

- Plain wire, no protection
- Galvanized
- Stainless steel

Top Wire (Gauge)*	Legs (Gauge)*	Options	Packaged
N/A	4 ga. up to 5" 2 ga. 5" to 9" 0 ga. over 9"	Chairs exceeding 12" will be reinforced with welded crosswires unless otherwise requested	2" – 6-3/4" 100/Ctn 7" – 12" 50/Ctn
N/A	4 ga. up to 5" 2 ga. 5" to 9" 0 ga. over 9"	Single and dual plates available	2" – 6-3/4" 100/Ctn 7" – 12" 50/Ctn
7 ga.	Various	N/A	100/Ctn
6 ga.	Various	N/A	500/Ctn
10 ga.	Various	Plain only	100/Ctn
6-10 ga.	Various	Ероху	100/Ctn
6-10 ga.	Various	Ероху	100/Ctn



Bar Supports - Plastic

- Some of the strongest plastic supports on the market. Manufactured from recycled resins.
- Plastic supports are DOT approved or accepted in all states and U.S. territories.
- 100% flexibility where grinding is likely. No exposed metal tips, eliminating the possibility of rust after grinding.
- Gray color for tilt-up applications. Gray color is excellent where minimal surface exposure is desired. Custom colors available upon request.
- Deflection of plastic supports is negligible, which practically eliminates the need for on-grade measurements and reduces labor expense.
- Manufactured to strict tolerances.

SteelLinx Concrete Reinforcement Products

Symbol Plastic I	Item Name Bar Supports	Photo	Application	
хс	X-Chairs H Chairs		Support upper steel or single mats in 1/4" increments. Designed to not create voids in concrete, and for placement directly on- center and over top of first layer of rebar and bolster.	
PC	Pac Chair 3 On-Grade Chairs		Support upper steel or single mats. Used as a rebar and remesh chair. Each chair has 2 heights for rebar and 1 height for remesh. Will hold 6, 8, 10 gauge mesh rolls and sheets. Reduces the need for dual inventories.	
мс	Mesh Chairs		Support for welded mesh in concrete slabs. Will hold mesh gauge 4 to 10.	
SP	Sand Plates	Q	Used with X-Chair and Plastic Slab Bolster on fill or other soft material.	
SB	Bolster (Slab/Beam) Plstc SB Short	Contraction of the second second	Used in a single mat or lower mats of steel Corrugations: 1" O.C. Lengths: 2-1/2" interlocking bolsters Mid-leg Supports: 2-1/2" from main legs Unique coupling system allows 2-1/2 ft. lengths to be snapped	
SB	Bolster (Slab/Beam) Plstc SB Tall	and the state of t	together quickly, and can be easily spliced at form ends. Bolsters eliminate on-grade measurements and no tie wire is needed, both reducing labor time and cost. Coupling system eliminates overlapping of metal bolsters. Mid-leg support offers extra stability and strength. In 1/4" height increments.	





Dimensions (Inches)				Packaged
Height X-Chairs: 3/4" to 8", (1/ H Chairs: 1" to 6", (1/2"				Varies depending on size
or 1-3/4" 2 2" or 2-1/4" 2 2-1/2" or 2-3/4" 2	Mesh Height 1-3/4" 2-1/4" 2-3/4" 3-1/4"	Rebar Height 3-1/2" or 3-3/4" 4" or 4-1/4" 4-1/2" or 4-3/4"	Mesh Height 3-3/4" 4-1/4" 4-3/4"	225 pcs/ctn
Mesh Height 1" 3" 1.5" 3.5" 2" 4" 2.5"				150, 175, 750 depending on size
Diameter 1.4" to 5.9"				250/pk
Height 3/4" to 4"				40, 55, 80 depending on size
Height 3/4" to 4"				40, 55, 80 depending on size



Reinforcing Accessories & Forming Products



Symbol	Item Name	Photo	Product Description	Application
AB	Specifications Anchor Bolts	14	Black or Galvanized connections	Used to form structural 1/2", 5/8", 3/4", 7/8" Lengths: 6" to 18" in 2" increments
LT	Bar Ties Loop Ties		Black annealed premium steel wire	Used to secure rebar bundles
Roll Wire	Bundle Wire	0	Annealed steel wire Only OSHA approved devices should be utilized for lifting. Bundle wire should never be used for lifting.	Used to tie rebar bundles
Hand Drive	Nails Bright Duplex	X	Duplex head nail plywood, plyform and lumber	Used to temporarily hold
PC	Paving Chair		Used to hold rebar in place	2-1/4" for a 4" slab 3 1/4" for a 6" slab
Rebar Caps	Safety Caps		Plastic Round or square orange caps Square: California, OSHA approved Round (mushroom cap): non-OSHA approved	Place at rebar ends
SD	Smooth Dowels		Smooth rebar	Used in joint reinforcement 1/2" x 24"
тw	Tie Wire		Soft black annealed	Used to tie rebar into place

Sizes	Gauges	Options	Packaged
Diameter:	round or square washer	Available with nut and washer	Boxes or bags, qtys vary with size
4" to 12" in 1/2" 17 ga.	16, 16-1/2 or coated and galvanized	Available plastic	4,000- or 5,000-piece increments
N/A	6, 9, 10 and 12 ga.	Epoxy coated or galvanized	100 lb. coils
8d, 16d, 20d	N/A	50 # Bulk Boxes	5 lb. box
N/A	N/A	7 bar	Square 50 per Round 25 per
#3 - #11 Bar	N/A	Round or square OSHA & non-OSHA	various carton sizes
1/2" x 18"	16 ga. or 16-1/2 ga.	Round or square hole	20 rolls per carton
3.5 lb coils or bulk coils	16 A or 16-1/2 gav	70# cartons or bulk rolls	20 rolls per carton 3.5# coils or bul rolls



Stakes, Expansion Joints / Zip Strips / Chamfer Strips

Hold lumber and forming panels in place prior to pouring.

Item Name Photo Size (inches) (pounds) Packaged probable							
takes $3/8" \times 1" \times 12"$ 1.7 10 1500 $3/8" \times 1" \times 24"$ 1.5 10 1500 $3/8" \times 1" \times 36"$ 3.75 10 1500 $3/8" \times 1" \times 36"$ 3.75 10 600 $3/8" \times 1" \times 42"$ 3.75 10 600 $3/8" \times 1" \times 42"$ 3.75 10 600 $3/8" \times 1" \times 42"$ 3.75 10 500 $3/8" \times 1" \times 42"$ 3.60 10 300 $3/8" \times 1" \times 42"$ 3.60 10 100 300 $3/8" \times 1" \times 48"$ 3.81 10 1000 500 $33'''''''''''''''''''''''''''''''''''$				Weight per Piece	Packaged	Packaged	
Flat Stakes with Holes V-TypeImage: Stakes with HolesImage: Stakes Stakes With HolesImage: Stakes Stakes With HolesImage: Stakes Stakes With HolesImage: Stakes Stakes StakesImage: Stakes Stakes StakesImage: Stakes Stakes StakesImage: Stakes Stakes StakesImage: Stakes Stakes StakesImage: Stakes Stakes StakesImage: Stakes StakesImage: Stakes St		Photo	Size (inches)	(pounds)	per Bundle	per Pallet	
with Holes Jakes x 1" x 18" 3/8" x 1" x 30" 3/8" x 1" x 48" 3.0 Join 100 1000 1000 1000 1000 1000 1000 100	Stakes						
with Holes Jakes x 1" x 18" 3/8" x 1" x 30" 3/8" x 1" x 48" 3.0 Join 100 1000 1000 1000 1000 1000 1000 100	Elat Stakes		2/0" v 1" v 10"	17	10	1500	
V-Type Image: Signed state							
$\begin{array}{c} \begin{array}{c} 3/8^{\circ} \times 1^{\circ} \times 30^{\circ} \\ 3/8^{\circ} \times 1^{\circ} \times 42^{\circ} \\ 3/8^{\circ} \times 1^{\circ} \times 42^{\circ} \\ 3/8^{\circ} \times 1^{\circ} \times 42^{\circ} \\ 3/8^{\circ} \times 1^{\circ} \times 48^{\circ} \\ 5.25 \\ 10 \\ \end{array} \qquad \begin{array}{c} \begin{array}{c} 10 \\ 600 \\ 600 \\ 600 \\ 400 \\ \end{array} \\ \end{array}$							
J8" x 1" x 36" 3/8" x 1" x 42" 3/8" x 1" x 42" 3/8" x 1" x 42" 3/8" x 1" x 48" 3.75 4.5 5.25 10 600 500 Flat Stakes with Holes C-Type Image: Stakes Stakes Image: Stakes Image: Stakes Stakes	v-Type						
Image: Stakes with Holes C-Type 3/8" x 1" x 42" 4.5 10 500 Stakes With Holes C-Type Image: Stakes Stakes With Holes 3/8" x 1" x 12" 6.0 10 300 3/4" Round Stakes With Holes Stakes With Holes Stakes With Holes Stakes With Holes 3/4" x 12" 6.0 10 300 3/4" Round Stakes With Holes Stakes							
Jame 3/8" x 1" x 48" 5.25 10 400 Flat Stakes with Holes C-Type Image: 1 model of the state of the s							
Flat Stakes with Holes C-Type Image: Constraint of the system of the syste							
with Holes C-Type 3.08 × 11 × 18" 3.8" × 11 × 24" 3.08 × 11 × 24" 3.08 × 10 10 1000 3.8" × 11 × 24" 3.8" × 11 × 30" 3.8" × 11 × 36" 3.8" × 11 × 42" 3.615 10 1000 3.74 " Round Stakes with Holes 3.4" × 12" 3.4" × 18" 3.4" × 18" 3.4" × 24" 10 500 3.4" x 12" 3.4" × 18" 3.4" × 18" 3.4" × 24" 8.2 10 300 3.4" x 12" 3.4" × 18" 3.4" × 24" 1.5 10 500 3.4" × 12" 3.4" × 18" 3.4" × 18" 8.2 10 300 3.4" × 12" 3.4" × 48" 3.0 10 1500 3.4" × 12" 3.4" × 24" 1.5 10 1000 3.4" × 24" 3.5 10 1500 3.4" × 48" 4.5 10 1000 3.4" × 24" 3.75 10 1000 3.4" × 24" 3.55 10 1000 7/8" × 24" 4.5 10 600 7/8" × 24" 5.1 10 1000 7/8" × 30" 5.5 10 300 7/8" × 42" 6.2 10 300 7/8" × 42" 5.8" 10 500 5/8" × 18"			3/8″ x 1″ x 48″	5.25	10	400	
with Holes C-Type 3/8" x 1" x 18" 3/8" x 1" x 24" 3/8" x 1" x 30" 3/8" x 1" x 30" 3/8" x 1" x 42" 3/8" x 1" x 42" 3/4" x 10" 3/8" x 1" x 42" 1.5 10 1500 1000 3/4" Round Stakes with Holes 3/4" x 12" 3/4" x 18" 3/4" x 24" 3/4" x 24" 3/4" x 24" 3/4" x 48" 8.2 10 300 3/8" x 1" x 48" 8.2 10 300 300 3/4" x 12" 3/4" x 24" 3/4" x 24" 8.2 10 300 3/4" x 48" 8.2 10 1000 7/8" Round Stakes with Holes 7/8" x 12" 7/8" x 30" 3.4 10 1000 7/8" Round Stakes with Holes 7/8" x 12" 7/8" x 48" 2.55 10 1000 7/8" Round Stakes 7/8" x 24" 7/8" x 24" 2.55 10 1000 7/8" x 24" 7/8" x 24" 7/8" x 30" 10 1000 1000 5/8" x 12" 7/8" x 48" 1.91 10 1000 1500 Square Stakes 5/8" x 12" 5/8" x 18" 5/8" x 30" 5/8" x 30" 2.87 5.73 10 1000 5/8" x 24" 7/8" x 36" 5.73 10 10 1000 1500	Flat Stakes		3/8" x 1" x 12"	6.0	10	300	
$\begin{array}{c} C-Type \\ C-Type \\ Square \\ Stakes \\ with Holes \\ Square \\ Stakes \\ Stakes \\ Stakes \\ Stakes \\ Stakes \\ with Holes \\ Square \\ Stakes \\ Stakes$	with Holes						
$3/3^{er} \times 1^{er} \times 30^{er}$ $3/3^{er} \times 1^{er} \times 30^{er}$ $3/3^{er} \times 1^{er} \times 30^{er}$ 10^{er} 750^{er} $3/8^{er} \times 1^{er} \times 30^{er}$ $3/8^{er} \times 1^{er} \times 30^{er}$ 5.13^{er} 10^{er} 500^{er} $3/8^{er} \times 1^{er} \times 42^{er}$ 6.15^{er} 10^{er} 500^{er} 500^{er} $3/8^{er} \times 1^{er} \times 42^{er}$ 7.18^{er} 10^{er} 500^{er} $3/4^{er} \times 12^{er}$ $3/4^{er} \times 12^{er}$ 6.15^{er} 10^{er} 300^{er} $3/4^{er} \times 24^{er}$ 1.5^{er} 10^{er} 300^{er} $3/4^{er} \times 24^{er}$ 1.5^{er} 10^{er} 100^{or} $3/4^{er} \times 24^{er}$ 3.0^{er} 3.0^{er} 10^{er} $3/4^{er} \times 42^{er}$ 3.75^{er} 10^{er} 1000^{or} $3/4^{er} \times 42^{er}$ 3.75^{er} 10^{er} 100^{or} $3/4^{er} \times 42^{er}$ 3.4^{er} 4.5^{er} 10^{er} $7/8^{er} \times 12^{er}$ 3.4^{er} 4.5^{er} 10^{er} $7/8^{er} \times 12^{er}$ 3.4^{er} 4.5^{er} 10^{er} $7/8^{er} \times 24^{er}$ 5.1^{er} 10^{er} 100^{or} $7/8^{er} \times 42^{er}$ 5.1^{er} 10^{er} 400^{or} Square $5/8^{er} \times 12^{er}$ 5.8^{er} 10^{er} 100^{or} $5/8^{er} \times 30^{er}$ 5.73^{er} 10^{er} 10^{or} $5/8^{er} \times 30^{er}$ 5.73^{er} 10^{er} 10^{er} $5/8^{er} \times 30^{er}$ 5.73^{er} 10^{er} 10^{er}	C-Type	No. of Concession, Name					
$3/8^{"} \times 1^{"} \times 36^{"}$ $3/8^{"} \times 1^{"} \times 42^{"}$ $3/8^{"} \times 1^{"} \times 42^{"}$ $3/8^{"} \times 1^{"} \times 48^{"}$ 5.13 6.15 10 10 500 500 300 $3/4^{"}$ Round Stakes with Holes $3/4^{"} \times 12^{"}$ $3/4^{"} \times 24^{"}$ $3/4^{"} \times 36^{"}$ $3/4^{"} \times 36^{"}$ $3/4^{"} \times 36^{"}$ $3/4^{"} \times 36^{"}$ $3/4^{"} \times 48^{"}$ 8.2 10 10 300 $7/8^{"}$ Round Stakes with Holes $7/8^{"} \times 12^{"}$ $3/4^{"} \times 48^{"}$ 8.2 10 10 1000 750 600 500 $7/8^{"}$ Round Stakes with Holes $7/8^{"} \times 12^{"}$ $7/8^{"} \times 12^{"}$ $7/8^{"} \times 30^{"}$ $7/8^{"} \times 48^{"}$ 2.55 10 10 1000 750 600 500 $7/8^{"} \times 10^{"}$ $7/8^{"} \times 48^{"}$ 2.55 10 10 1000 750 600 500 $7/8^{"} \times 12^{"}$ $7/8^{"} \times 48^{"}$ 2.55 10 10 1000 750 600 500 $7/8^{"} \times 18^{"}$ $5/8^{"} \times 14^{"}$ 2.55 10 10 1000 750 6.2 10 Square Stakes $5/8^{"} \times 12^{"}$ $5/8^{"} \times 12^{"}$ $5/8^{"} \times 30^{"}$ $5/73$ $5/73$ 10 1000 750 600 750 600 100	21						
3/8" x 1" x 42" 6.15 10 500 3/4" Round 3/4" x 12" 3/4" x 18" 10 300 3/4" Round 3/4" x 12" 3/4" x 18" 8.2 10 300 3/4" kles 3/4" x 24" 1.5 10 1500 1500 3/4" x 30" 2.25 10 1000 1500 1000 3/4" x 48" 4.5 10 1000 500 7/8" Round 7/8" x 12" 3.4 10 500 7/8" Round 7/8" x 12" 3.4 10 1000 51akes 7/8" x 18" 3.4 10 500 7/8" x 00" 5.1 10 1000 500 51 10 100 500 500 7/8" x 48" 1.91 10 1000 500 51 10 500 500 500 500 500 52 10 10 1000 500 500 500 500 500 500 500 500 500 500 500 500 500 500 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
3/4" Round Stakes with Holes 3/8" x 1" x 48" 7.18 10 300 3/4" Round Stakes with Holes 3/4" x 12" 3/4" x 24" 3/4" x 30" 3/4" x 42" 8.2 10 1500 7/8" Round Stakes with Holes 7/8" x 12" 3/4" x 48" 8.2 10 1500 7/8" Round Stakes with Holes 7/8" x 12" 3/4" x 48" 3.0 10 750 7/8" Round Stakes 7/8" x 12" 3/4" x 48" 2.55 10 1000 7/8" x 18" 3.4 10 1000 500 7/8" x 18" 3.4 1.5 10 1000 Stakes with Holes 7/8" x 18" 7/8" x 30" 3.4 10 1000 Stakes 5/8" x 18" 3.4 1.91 10 1000 Stakes 5/8" x 12" 2.87 10 100 300 Stakes 5/8" x 18" 3.82 10 1000 1500 Stakes 5/8" x 18" 3.82 10 1000 1500 Stakes 5/8" x 18" 3.6" 10 500 10 500 Stakes 5/8" x 36" 5.73 10 500							
3/4" Round Stakes with Holes $$							
Stakes with Holes $3/4" \times 18"$ $3/4" \times 24"$ $3/4" \times 30"$ $3/4" \times 30"$ $3/4" \times 30"$ 2.25 10 10300 1000 10007/8" Round Stakes with Holes $7/8" \times 12"$ $7/8" \times 14"$ 2.55 10 101000 10007/8" Round Stakes with Holes $7/8" \times 12"$ $7/8" \times 24"$ 2.55 10 101000 10007/8" x 12" $7/8" \times 24"$ 2.55 3.4 4.5 101000 750 7/8" x 48" 2.55 10 101000 750 7/8" x 48" 2.55 10 101000 750 7/8" x 44" $7/8" \times 24"$ $7/8" \times 36"$ 5.1 10 10900 $7/8" \times 44"$ $7/8" \times 44"$ 6.2 10 10900 $7/8" \times 42"$ $7/8" \times 36"$ 7.50 5.95 900 $7/8" \times 42"$ 1.91 7.50 10 900 $7/8" \times 36"$ $5/8" \times 36"$ 7.573 10 900 7.50 5.69 7.50 10 7.50 500 900 7.78 8.736 7.73 10 7.50 500 900 7.73 7.73 7.50 10 7.50 7.50			3/8° X 1° X 48°	7.18	10	300	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	3/4" Round		3/4" x 12"	and the second second			
with Holes $3/4" \times 24"$ 1.5101500 $3/4" \times 30"$ 2.25 101000 $3/4" \times 36"$ 3.0 10750 $3/4" \times 42"$ 3.75 10600 $3/4" \times 48"$ 4.5 10500 $7/8"$ Round $7/8" \times 12"$ 2.55 101000 $7/8" \times 18"$ 3.4 10500 $7/8" \times 18"$ 3.4 10750 $7/8" \times 24"$ 4.25 10600 $7/8" \times 30"$ 5.1 10500 $7/8" \times 42"$ 6.2 10300 $7/8" \times 48"$ 1.91101500Square $5/8" \times 12"$ 2.87 101000Stakes $5/8" \times 24"$ 4.78 10750 $5/8" \times 30"$ 5.73 10500 $5/8" \times 30"$ 5.73 10600 $5/8" \times 30"$ 5.73 10500 10 400 400 400			3/4" x 18"	8.2	10	300	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		And in case of the local division of the loc	3/4" x 24"	1.5	10	1500	
3/4" x 36" 3/4" x 42" 3/4" x 48" 3.0 3.75 4.5 10 10 750 600 500 7/8" Round Stakes with Holes 7/8" x 12" 7/8" x 18" 7/8" x 24" 7/8" x 24" 7/8" x 24" 7/8" x 30" 5.1 2.55 3.4 10 10 1000 750 600 10 Square Stakes 5/8" x 12" 5/8" x 48" 2.87 4.25 10 10 1000 500 Square Stakes 5/8" x 12" 5/8" x 30" 5/8" x 30" 2.87 5.73 10 10 1000 750 600			3/4" x 30"	2.25	10	1000	
3/4" x 42" 3.75 10 600 7/8" Round 7/8" x 12" 2.55 10 10 500 7/8" Round 7/8" x 12" 2.55 10 1000 750 stakes 7/8" x 12" 3.4 4.25 10 1000 750 with Holes 7/8" x 30" 5.1 10 500 600 500 7/8" x 42" 6.2 10 10 500 10 1000 500 Square 5/8" x 12" 2.87 10 10 1500 100 1000 Square 5/8" x 12" 5/8" x 18" 3.82 10 750 10 500 Stakes 5/8" x 18" 5.73 10 500 100 500 Stakes 5/8" x 30" 5.73 10 600 500 500 5/8" x 30" 5.73 10 6.69 10 400		and the second s	3/4" x 36"	3.0		750	
7/8" Round Stakes with Holes 7/8" x 12" x 18" 2.55 3.4 10 10 1000 750 600 750 600 501 Square Stakes 5/8" x 12" x 30" 7/8" x 36" 7/8" x 36" 7/8" x 36" 5.95 1.91 2.55 10 10 10 10 1000 750 600 100 Square Stakes 5/8" x 12" 5/8" x 18" 5/8" x 18" 5/8" x 30" 5/8" x 30" 5/8" x 30" 5/8" x 36" 10 3.4 5.95 10 1.91 1000 750 600 10		and the second s					
Stakes with Holes $7/8 \times 12^{"}$ 2.53 10 1000 $7/8" \times 18"$ 3.4 10 750 $7/8" \times 24"$ 4.25 10 600 $7/8" \times 30"$ 5.1 10 500 $7/8" \times 36"$ 5.95 10 400 $7/8" \times 42"$ 6.2 10 300 $7/8" \times 48"$ 1.91 10 1500 Square $5/8" \times 12"$ 2.87 10 1000 Stakes $5/8" \times 12"$ 2.87 10 1000 $5/8" \times 18"$ 3.82 10 750 $5/8" \times 24"$ 4.78 10 600 $5/8" \times 30"$ 5.73 10 500 $5/8" \times 30"$ 5.73 10 400		S. S. Part.					
Stakes with Holes $7/8 \times 12^{"}$ 2.53 10 1000 $7/8" \times 18"$ 3.4 10 750 $7/8" \times 24"$ 4.25 10 600 $7/8" \times 30"$ 5.1 10 500 $7/8" \times 36"$ 5.95 10 400 $7/8" \times 42"$ 6.2 10 300 $7/8" \times 48"$ 1.91 10 1500 Square $5/8" \times 12"$ 2.87 10 1000 Stakes $5/8" \times 12"$ 2.87 10 1000 $5/8" \times 18"$ 3.82 10 750 $5/8" \times 24"$ 4.78 10 600 $5/8" \times 30"$ 5.73 10 500 $5/8" \times 30"$ 5.73 10 400							
with Holes with Holes $7/8" \times 24"$ 4.25 10 600 $7/8" \times 30"$ 5.1 10 500 $7/8" \times 36"$ 5.95 10 400 $7/8" \times 42"$ 6.2 10 300 $7/8" \times 48"$ 1.91 10 1000 500 $7/8" \times 48"$ 1.91 10 1000 1500 $5/8" \times 12"$ $5/8" \times 382$ 10 750 $5/8" \times 18"$ 3.82 10 750 $5/8" \times 24"$ 4.78 10 600 750 $5/8" \times 30"$ 5.73 10 500 400			7/8" x 12"	2.55	10	1000	
Square 5/8" x 12" 2.87 10 100 1000 Square 5/8" x 12" 2.87 10 1000 Stakes 5/8" x 12" 3.82 10 1000 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 400 5/8" x 30" 5.73 10 400 5/8" x 30" 5.73 10 400			7/8" x 18"	3.4	10	750	
Square Stakes 5/8" x 12" 2.87 10 100 300 Square Stakes 5/8" x 12" 2.87 10 1000 1500 Square Stakes 5/8" x 12" 5/8" x 18" 3.82 10 1000 750 5/8" x 18" 5/8" x 30" 5.73 10 500 500 10 400 5/8" x 30" 5.73 10 400 400 10 1000 1000 5/8" x 30" 5.73 10 400 400 10 10 10	with Holes	Married Street S	7/8" x 24"	4.25	10	600	
Square Stakes 5/8" x 42" 6.2 10 300 Square Stakes 5/8" x 12" 2.87 10 1000 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400			7/8" x 30"	5.1	10	500	
Square Stakes 7/8" x 48" 1.91 10 1500 Square Stakes 5/8" x 12" 2.87 10 1000 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400		and the second s	7/8" x 36"	5.95	10	400	
Square Stakes 5/8" x 12" 2.87 10 1000 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400			7/8" x 42"	6.2	10	300	
Stakes 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400			7/8" x 48"				
Stakes 5/8" x 18" 3.82 10 750 5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400	0	and the second second	2				
5/8" x 24" 4.78 10 600 5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400							
5/8" x 30" 5.73 10 500 5/8" x 36" 6.69 10 400	Stakes	No. of Concession, No. of Conces					
5/8" x 36" 6.69 10 400							
			5/8" x 30"		10		
			5/8" x 36"	6.69	10		
		AR STOR		7.64	10	300	
		And the state of the state of			-		
		Contraction of the second	the star		Barrie and		
		Contraction of the second		Contraction of the local diversion of the local diversion of the local diversion of the local diversion of the	and the second second		

SPECIAL

^{*}Pieces per pallet may vary slightly depending on manufacturer.

Item Name	Photo	Height & Width (inches)	Length (feet)
Expansion Join	ts / Zip Strips / Chamfer Strips	6	
Softboard Expansion Joint		1/2" x 3-1/2" 1/2" x 4" 1/2" x 5-1/2" 1/2" x 6"	10'
Merch/Merch Heart Redwood Expansion Joint		1" x 4", 1" x 6"	10' to 20' specified lengths
Redwood Zip Stri	ps	1/2" x 1"	10'
Chamfer Strips – Banak R/L		1/2" 10'	10'

Site Accessory Products

Item Name Stakes	Photo	Application	Sizes	Options	Packaged
Nails & Screws	*	Various	Various	Various Coatings Available	10 lb 25 lb 50 lb
Polyethylene Film	Black or Clear film	Used to protect wet concrete while curing	1.5 mil to 20 mil	Various widths, Black & Clear	Single rolls or pallet
Rigid Foam Insulation		Insulation value with concrete & backfill applications	1/2" - 4"	Expanded poly styrene	Various size units
Screed Key		Leveling concrete pour with forms	Various	Various	4' x 8' panel size
Silt Fence	Black woven fabric with stakes	Use to help control drainage and erosion on job site	2' x 100' 3' x 100'	Dot and non-dot	Rolls
Structural Lumber Connectors	1	Structural connection	Various	N/A	Various single to carton quantity

Metal Studs & Framing

Better builder's choice

In contrast to lumber, metal is produced in strict accordance with national, rather than regional, standards so you can expect consistent material quality. Also, leave the job site with less scrap and waste than lumber. Besides its economic value and consistent quality, metal boasts assorted advantages that builders, electricians, carpenters, and engineers have relied on for centuries. Metal framing meets high seismic and wind load specifications, allows flexibility in design and easily accompanies gypsumboard without shrinking, splitting, warping, or rotting. Before purchasing metal framing materials, consider the shape, strength, and thickness of metal that your project requires.



OTHER LENGTHS VAILABLE SPECIAL ORDER BASIS

Metal Studs - Stock items

ITEM #	SIZE	DESCRIPTION
138602	1-5/8" X 8'	METAL STUDS 20 GAUGE*
201966	1-5/8" X 8'	METAL STUDS 25 GAUGE
675694	1-5/8" X 10'	METAL STUDS 20 GAUGE*
201967	1-5/8" X 10'	METAL STUDS 25 GAUGE
624168	2-1/2" X 8'	METAL STUDS 20 GAUGE*
192432	2-1/2" X 8'	METAL STUDS 25 GAUGE
535067	2" X 10'	METAL H STUD 25 GAUGE
187231	2-1/2" X 10'	METAL STUDS 20 GAUGE*
155450	2-1/2" X 10'	METAL STUDS 25 GAUGE
186972	3-5/8" X 8'	METAL STUDS 25 GAUGE
168460	3-5/8" X 8'	METAL STUDS 20 GAUGE (DRYWALL)
139495	3-5/8" X 10'	METAL STUDS 25 GAUGE
108945	3-5/8" X 10'	METAL STUDS 20 GAUGE (DRYWALL)
107789	3-5/8" X 12'	METAL STUDS 25 GAUGE
198142	3-5/8" X 12'	METAL STUDS 20 GAUGE (DRYWALL)
107051	3-5/8" X 14'	METAL STUDS 20 GAUGE*
197483	3-5/8" X 16'	METAL STUDS 20 GAUGE*

*Stocked in Chicago

ITEM #

235961

191492

211466

Metal Tracks - Stock Items

2-1/2" X 10'

3-5/8" X 10'

3-5/8" X 10'

ITEM #	SIZE	DESCRIPTION
235958	1-5/8" X 10'	METAL TRACK 20 GAUGE 1-1/4" LEG*
105631	1-5/8" X 10'	METAL TRACK 25 GAUGE 1-1/4" LEG
535065	2" X 10"	METAL C TRACK 25 GAUGE FOR H STUD

*Stocked in Chicago

GE 1-1/4" LEG IGE FOR H STUD METAL TRACK 25 GAUGE 1-1/4" LEG METAL TRACK 25 GAUGE 1-1/4" LEG METAL TRACK 20 GAUGE 1-1/4" LEG

SteelLinx Strapping Solutions

Strapping can be categorized as flat steel, plastic, or round wire.

Our line of flat steel strapping includes the full range of regular-duty, high tensile, and heavy-duty products. In addition, we also supply a complete line of tools, tool parts, dispensers, seals, edge protection, and a variety of accessory products to complete your strapping requirements. More economical than some alternative methods, plastic strapping has gained wide acceptance in the strapping market. Within this complete line, BlueLinx offers a full range of polypropylene, polyester, and nylon strapping products. Round wire strapping is used for unitizing applications. BlueLinx offers single and double loop wire ties, straight and cut wires, as well as high tensile bailing wires. These products are available in basic steel, galvanized or black annealed, and come in several different gauges.

Strapping Products

ITEM #	SIZE	DESCRIPTION
359309	3/4" X .029	H.T. STEEL STRAP OSCA SKID
172311	3/4" X .031	H.T. STEEL STRAP SKID
271384	1-1/4" X .029	H.T. STEEL STRAP R/W SKID
623514	3/4" X .023	R.D. STEEL STRAP SKID
403149	3/4"	OPEN SEAL 5000 PER BOX
221186	3/4"	H.D. SEMI-OPEN SEAL 2000 PER BOX
220190	1-1/4"	SEMI-OPEN SEAL 1000 PER BOX



BLUELINX OFFERS A WIDE SELECTION OF STEELLINX NAILS, SCREWS, STAPLES, AND COLLATED FASTENERS IN A VARIETY OF TYPES, SIZES, AND FINISHES FOR VIRTUALLY ANY APPLICATION. STEELLINX COLLATED FASTENERS CAN BE USED IN VIRTUALLY ANY BRAND OF TOOL AND ARE LABELED WITH HANDY CROSS-REFERENCE INFORMATION.



SteelLinx Metal Connectors

Metal connectors minimize wind and storm damage.

One of the best ways to attach walls, floors, and roof structures directly to the house's foundation is to use readily available, inexpensive metal connecting plates and anchors along with approved structural nails. In a typical house, only the treated sill plate is firmly bolted to the foundation. There are numerous easy-to-install metal connectors that allow you to quickly bolt floors and walls to the foundation and then connect every other major wall, floor, or roof section. The implementation provides a continuous metal connection path from the roof down to the foundation.



Terminology

- **Joist Hanger:** For attaching joist hangers to wood.
- Fluted Masonry Nail: Attaches wood to masonry. Heat-treated for strength. Fluted shank for better holding.
- Cut Masonry Nail: For attaching wood to cinder blocks and fresh concrete.
- Roofing Nail: For attaching shingles to roof. Wide head resists pull-through. Galvanized to resist rust.
- E.G. Neo Washer Roofing Nail: For attaching steel or fiberglass roofing to wood. Neoprene washer seals opening.
- Round Plastic Cap Nail: Plastic caps are made of first-run plastic for superior performance. Ring shank for holding power. For housewrap, sheathing, and felt.
- Polebarn Nail: For pole construction. Hardened for strength. Ring shank for holding power.

Face Mount Joist Hangers

ITEM #	SIZE	DESCRIPTION
443555	2-1/2" X 9-1/2"	WI40
538449	2-1/2" X 9-1/2"	DOUBLE WI40
440606	2-1/2" X 11-7/8"	WI40 & WI60
484086	2-1/2" X 11-7/8"	DOUBLE WI40 & WI60
386703	2-1/2" X 14"	WI40 & WI60
501255	2-1/2" X 14"	DOUBLE WI40 & WI60
282769	3-1/2" X 11-7/8"	WI80
202631	3-1/2" X 14"	WI80
474918	3-1/2" X 16"	WI80



Top Mount Joist Hangers

ITEM #	SIZE
703629	2-1/2" X 9-1/2"
690836	2-1/2" X 11-7/8"
	2-1/2" X 11-7/8"
703628	2-1/2" X 14"
450097	3-1/2" X 11-7/8"
277404	3-1/2" X 14"
298529	3-1/2" X 16"
*5-7 DAY LEA	D TIME

DESCRIPTION WI40 – STOCK WI40 – STOCK WI40 – DOUBLE* WI40 – STOCK WI80 – STOCK WI80 – STOCK WI80 – STOCK

Face Mount LVL Hangers

		<u> </u>
ITEM #	SIZE	DESCRIPTION
408484	1 3/4" X 9 1/4"-14"	LVL SINGLE
424073	9 1/4"-14"	DOUBLE LVL
614478	14"-18"	DOUBLE LVL
523154	11 1/4"-16"	TRIPLE LVL
484084	11-1/4"-16"	TRIPLE HEAVY DUTY LVL 1



NIAHTS

SPECIAL ORDER 7-DAY LEAD TIME

Skewed 45 Hangers

.

.

SIZEDESCRIPTION1-3/4"JOIST OR LVL - SK 45 RT OR LEFT - STOCK2-1/2"WIDE 9 1/2" JOISTS - SK 45 RT OR LEFT - STOCK2-1/2"WIDE 11 7/8" JOISTS - SK 45 RT OR LEFT - STOCK3-1/2"WIDE LVL OR JOIST - SK 45 RT OR LEFT - STOCK

Other Framing Connectors

SIZE / DESCRIPTION 2 X 4 TRIPLE ZINC 2 X 6, 2 X 8 TRIPLE ZINC 2 X 8 TRIPLE ZINC DOUBLE 2 X 8 TRIPLE ZINC 2 X 10 TRIPLE ZINC DOUBLE 2 X 10 TRIPLE ZINC 2 X 4 18 GAUGE RAFTER TIES 50L/50R RAFTER/TRUSS TIE RAFTER/TRUSS TIE





SteelLinx Metal Roofing

Metal roofing isn't just for barns anymore.

From tool sheds to residential homes to industrial warehouses, metal is becoming the material of choice for many roofing and siding applications. Metal roofs are favored for their fire-resistant qualities, longevity, and speed of installation – in most cases, by a qualified metal-roofing contractor. They are also surprisingly lightweight and are great at reflecting heat from the sun.

Corrugated: Galvanized coating protects from wear and tear

5-V: Galvanized coating is great for climates affected by

from heavy machinery and livestock damage.

moisture and heat. Resists rust and corrosion.

Terminology

- Profile Roofing: Provides versatility with an updated look. This can be used on a roof, cabin, or barn, and is durable enough to meet the needs of any location.
- **Loc Seam:** Long-lasting roofing alternative that is a lowmaintenance steel panel, providing strength and durability.
- **R-Panel:** Designed to withstand high winds, this panel is versatile in application. R-Panel is not only a strong roofing RIDGE CAP alternative, but can be used as a general utility panel in industrial, residential, agricultural, and light commercial applications. SIDE RAKE TRIM OUTSIDE CORNER W-VALLEY TRIM DRIP EDGE/ RAKE EDGE RAKE WALL TRIM **HIP & DORMER RIDGE CAP** HIP & DORMER RIDGE CAP END WALL FLASHING ROOF PITCH TRANSITION (GABLE PITCH CHANGE)

Metal Roofing Colors: 7- to 10-day lead time



24 GAUGE COLORS



26 GAUGE COLORS

DARK BRONZE	MATTE BLACK	SLATE GRAY	BANNER RED	CLASSIC GREEN	COLONIAL RED
HARTFORD GREEN	SNOWDRIFT WHITE	REGAL BLUE	BONE WHITE	SANDSTONE	SIERRA TAN
ASH GRAY	MEDIUM BRONZE	MANSARD BROWN			

29 GAUGE COLORS

FERN GREEN	ANTIQUE BRONZE	POLAR WHITE	IVORY	HUNTER	LIGHT BROWN
BONE WHITE	CLAY	BLUE	BROWN	BRITE RED	TAN
GALLERY BLUE	CHARCOAL	RED	LIGHT GRAY	*COPPER PENNY	BLACK
BURGANDY	STONE	GALVALUME			

* Metallic Colors: Colors shown may vary slightly from actual material. Request metal color samples for true representation.

135

 ΔT

Metal Roofing Profiles Special

Clean and contemporary

Metal roofing materials are made primarily from aluminum and steel, but other materials, such as copper and alloys, are also used. Some sheet-style materials such as "standing-seam roofing" have a decidedly commercial look that is favored by architects for their clean, contemporary appearance.

Kenl oc

- Available in 26 or 24 gauge
- Concealed Fastener System with nail fin
- 1" x 16" or 1-1/2" x 14-7/8" coverage
- Available in ribbed, striated, or flat
- Perfect for residential or light commercial applications
- 15 SMP or 29 Kynar color offerings to choose from
- Offered with cool roof rated finishes to reduce energy consumption
- 40-year non-transferable warranty


StayLoc

- Available in 26 or 24 gauge
- Concealed Fastener System
- with clip 1" x 16" or 1-1/2" x 16"
- coverage • Available in ribbed, striated, or flat
- Perfect for residential or light commercial applications
- ▶ 15 SMP or 29 Kynar color offerings to choose from
- Offered with cool roof rated finishes to reduce energy consumption
- 40-year non-transferable warranty

MechLoc

- Available in 26 or 24 gauge
- Mechanically seamed
- 1" x 16" or 1-1/2" x 16" coverage
- Available in ribbed, striated, or flat
- Perfect for residential or light commercial applications
- 15 SMP or 29 Kynar color offerings to choose from
- Offered with cool roof rated finishes to reduce energy consumption
- 40-year non-transferable warranty





FastPanels

- Available in 29 gauge
- Exposed Fastener System
- 24" coverage 5V Crimp Panel
- 36" coverage Perfect Rib Panel
- Available in ribbed, striated, or flat
- Perfect for agricultural, post frame, & residential applications
- 21 SMP color offerings to choose from
- Offered with cool roof rated finishes to reduce energy consumption
- 40-year non-transferable warranty



Internet







Ordering Information

Service Levels & Supply Chain

- Low order minimums for BlueLinx customer drop ships
- Weekly route trucks
- Flexibility to order what you need
- Reduce on-hand inventory, increasing your inventory turns
- Increase sales and in-stock position with frequent deliveries of the right product
- Please call for special order lead time and pricing

Sales Support Materials

- Contact your local representative to receive sales support materials.
- SteelLinx Brand is a BlueLinx branded product that you can count on for quality!

Edge Metal & Flashings

Aluminum roll flashing, or valley metal, is used in a variety of residential applications. It's most commonly field formed and used in a flashing or trim capacity for various areas of a home such as chimneys, fascia, endwalls, and sidewalls. Lightweight and easy to work with, aluminum roll flashing resists rust. If it's strength you're seeking, however, choose from our galvanized steel flashing.

Drip Edge

- Available in 26 gauge Aluminum, 30 gauge Painted Steel, 30 gauge Galvanized Finish, & 12 oz. Copper
- Aluminum 26 Mastic Colors Steel - White, Royal Brown, Terra Bronze, Black, Mill
- 1" to 2" profiles
- All products available with hemmed edges
- Used for perimeter flashing for residential homes

W-Valley

- Available in 26 gauge
 Aluminum, 30 gauge Steel,
 & 16 oz. Copper
- Aluminum White, Royal Brown, Terra Bronze, Black Steel - White, Royal Brown, Terra Bronze, Black, Mill
- Aluminum/Copper 24" Steel - 18", 20", 24"
- All products available with hemmed and opened hemmed edges
- Used as valley flashing

Gutter Apron

- Available in 26 gauge Aluminum, 30 gauge Painted Steel, 30 gauge Galvanized Finish, & 12 oz. Copper
- Aluminum 26 Mastic Colors Steel - White, Royal Brown, Terra Bronze, Black, Mill
- 1-1/2" to 2" profiles
- All products available with hemmed edges
- Use to direct water flow from the roof over the gutter

Rake Edge

- Available in 26 gauge Aluminum, 30 gauge Painted Steel, & 30 gauge Galvanized Finish
- Aluminum White, Royal Brown, Terra Bronze, Black Stool, White Boyal Brown
- Steel White, Royal Brown, Terra Bronze, Black, Mill
- 1" to 2" profiles
- All products available with hemmed edges
- Used for perimeter flashing for residential homes

Roll Valley

- Available in 32 gauge
 Aluminum, 32 gauge Steel,
 & 16 oz. Copper
- Aluminum Mill
 Steel Royal Brown & Terra Bronze (8", 10", & 12")
- Aluminum 10", 12", 14", 20"
 Steel (ML) 8", 10", 14", 16", 20", 24"
 Painted Steel (RB & TB) 8", 10", 20"
 Copper 12", 14", 16", 20", 24"
- Aluminum/Steel 50' Rolls
 Copper 100 lbs. except 16"
- Used as valley flashing

Pre-Bent Step Flashing

- Available in 32 gauge
 Aluminum, 32 gauge Steel,
 & 12 oz. Copper
- Aluminum White, Royal
 Brown, Terra Bronze, Black,
 ML Steel White, Royal Brown, Terra Bronze, Black, Mill
- Aluminum 5x7 & 8x8 Steel/Copper - 5x7 - 9x14
- Use for flashing roofs between one- to two-story transitions











Metal Accessories – Stock Items

Flashings

ITEM #	SIZE	DESCRIPTION
101501	20" X 50'	GALVANIZED FLASHING
102337	4" X 4" X 8"	PREBENT GALV STEP FLASHING

Drip Edge

ITEM #	DESCRIPTION
736323	DRIP EDGE ALUMINUM 1" FACE STANDARD WHITE
738664	DRIP EDGE ALUMINUM 1" FACE ECONOMY WHITE
738665	DRIP EDGE ALUMINUM 1" FACE ECONOMY BROWN
476870	DRIP EDGE ALUMINUM 1 1/2" FACE WHITE
427366	DRIP EDGE ALUMINUM 1 1/2" FACE BROWN
479067	DRIP EDGE ALUMINUM 1.95" FACE WHITE
344941	DRIP EDGE ALUMINUM 1.95" FACE BROWN
327216	DRIP EDGE GALVANIZED 1 1/8" FACE WTHIE

Gutter Apron

ITEM #	DESCRIPTION	
217615	ALUM GUTTER APRON	10' BROWN
217614	ALUM GUTTER APRON	10' WHITE
648322	ALUM GUTTER APRON	10' WEATHEREDWOOD
716771	ALUM GUTTER APRON	10' HICKORY

Additional Metal Items

Cornerbead

ITEM #	SIZE	DESCRIPTION	
741341	1 1/4" X 10'	CORNERBEAD	50 PCS/CTN
741339	1 1/4" X 8'	CORNERBEAD	63 PCS/CTN

Steel Plywood Clips

ITEM #	SIZE	DESCRIPTION
102432	7/16"	PLYWOOD CLIPS (250/CTN)
102466	1/2"	PLYWOOD CLIPS (250/CTN)
102475	5/8"	PLYWOOD CLIPS (250/CTN)



VISIT BlueLinx

Siding Accessories

Using high-grade trim coil, soffit, and fascia helps reduce costly repairs and maintenance caused by the effects of rain, snow, and wind. These accessories are rated by their performance, given the time and expense that siding projects entail. BlueLinx provides such options that help uphold the overall appearance and structural integrity of your home.

Starter Strip

- Available in 26 gauge Aluminum & 30 gauge Steel
- 2-1/2" to 3-1/2" profiles
 Used for starting the first course of vinyl siding



Soffit

- Available in 26 gauge Aluminum
- 33 colors
- 12" & 16" panels in smooth, center vent, & full vent
- Used to cover overhang




Trim Coil

- Available in 26 gauge Aluminum PVC & Smooth
- Color match available in Mastic, Veriform, Royal, & CertainTeed
- 24" x 50' 14" x 50' (limited colors)
- Used for window trim, door trim, hand-bent fascia, & house skirting

Fascia

- Available in 26 gauge Aluminum
- 33 colors (10" is only available in White)
- 6", 8", & 10" panels in smooth with rib & woodgrain
- Used to cover fascia board





SteelLinx Nails

Nails can make or break a building project.

Nails are distinguished by their heads, shanks, points, surface finishes, and composition of steel, aluminum, and stainless. Length varies. Finishes include: Bright in which after manufacture, nails are tumbled to remove dirt and "chips," and packed uncoated; Galvanized in which zinc coating is applied by hot tumbler, electro or mechanical process, or dipping to help protect against atmospheric corrosion; Green Vinyl Coated in which vinyl coating is applied via tumbler to provide increased holding power; and Blued in which nails are heated until an oxidation layer is formed.



Coating Types:

- Bright: Uncoated steel finish for use where corrosion resistance is not required.
- Vinyl Coating: Helps the nail drive easier, and hold better once driven.
- **Electro-Galvanized (E.G.):** Limited resistance to rust.
- Hot-Dipped Galvanized (H.G.): High-quality zinc coating to resist rust and weathering. Effective for outdoor use.
- **Phosphate Coating:** Ferric phosphate coating for protection.

Stainless Steel Nails & Screws

Offer the ultimate protection against extreme environmental conditions. Recommended for redwood and cedar. Recommended for treated lumber, including ACQ.

Shank Types:

- **Smooth Shank:** Drives easily, gives least holding power.
- **Barbed Shank:** Horizontal or herring bone indentations in the shank. Holds better than smooth nail of the same size.
- Screw Shank: Specially designed to drive into hardwoods and dense materials. Nail actually turns when driven – much like wood screws. Very good holding power.
- Ring Shank: Also known as annular thread, or a/t. Has a series of closely spaced concentric rings around its shank. Wood fibers are forced over the ring shoulders into their annular grooves like wedges. Can be driven into knots. Gives great holding power in soft or medium woods. Helps prevent squeaks in floors and stairs.
- Fluted Shank: Vertical thread for driving into cinder block, mortar joints, or other masonry.

Common Nail Definitions:


- **Box:** For general construction and framing. Thin shank reduces wood splitting.
- **Common:** For general construction, carpentry and framing. Larger shank for more strength.
- Sinker: For general construction, carpentry and framing.
 Coated for lubrication when driving, then better holding power.

- **Finish:** For carpentry and finish work. Small head for countersinking.
- Casing: For wood trim, window frames, and casing. Small heads for countersinking, larger shank than finish. Galvanized to resist rust.
- **A/T Drywall:** (Annular Thread/Ring Shank) For greater holding power. For attaching drywall to wood studs.
- P.C. Drywall: (Dri-Tite) For attaching drywall to wood studs. Cupped head allows mud to adhere to head.
- **Duplex:** Double head for temporary nailing. For concrete forming and scaffolding.



Collated Fasteners

SteelLinx offers a complete line of high-quality collated fasteners, along with complete shipping and just-in-time inventory support. SteelLinx collated fasteners can be used in virtually any brand of tool and are labeled with handy cross-reference information. Available in all standard lengths, each line comes in your choice of smooth, ring or spiral shank, and coatings include bright, electro galvanized, hot dipped, galvanized, and stainless varieties.

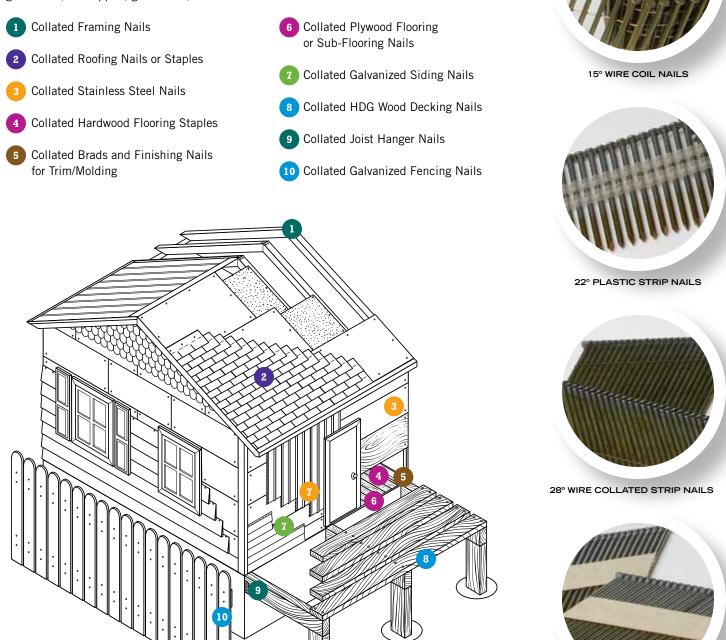

33° PAPER TAPE STRIP NAILS

Meets ASTM F 1667 where applicable.

Electro Galvanized Roofing Nails

SIZE	DECSRIPTION
1 1/4"	E.G. ROOFING NAILS
1 1/2"	E.G. ROOFING NAILS
1 3/4"	E.G. ROOFING NAILS
2"	E.G. ROOFING NAILS
2 1/2"	E.G. ROOFING NAILS
	1 1/4" 1 1/2" 1 3/4" 2"

.

Nail Sizes

		SIZE	LENGTH
Duplex Nails		2D	1"
ITEM # SIZE	DECSRIPTION	3D	1-1/4"
165797 8D	BRITE DUPLEX NAILS	4D	1-1/2"
190601 16D	BRITE DUPLEX NAILS 50LB	5D	1-3/4"
		6D	2"
		7D	2-1/4"
		8D	2-1/2"
Plastic Cap Nails		10D	3"
ITEM # SIZE	DECSRIPTION	12D	3-1/4"
214237 1"	PLASTIC CAP	16D	3-1/2"
219931 11/4"	PLASTIC CAP	20D	4"
209339 1 1/2"	PLASTIC CAP	30D	4-1/2"
209340 2"	PLASTIC CAP	40D	5"
		50D	5-1/2"
		60D	6"
		70D	7"
		80D	8"
Plasti-Top Fasten	iers	90D	9"
ITEM # SIZE	DECSRIPTION	100D	10"
655061 1-1/4"	PLASTI-TOP PROPACK FASTENERS		

Coil Roofing

ITEM #	SIZE	DECSRIPTION
210789	1-1/4" X .120	COIL ROOFING
210790	1-1/2" X .120	COIL ROOFING
210791	1-3/4"X .120	COIL ROOFING

.

Cement Coated Sinker Nails

ITEM #	SIZE	DECSRIPTION
159982	8D	CC SINKER NAILS
198125	16D	CC SINKER NAILS



Nail Types

Product Information	
APPLICATION	NAIL TYPE
Roofing Asphalt Shingles & Felt 	EG/HDG Roofing
Roofing/Siding Wood Shingles	Galvanized Shingle
Duplex Nails	Bright Duplex
Plastic Cap/Metal Cap	Plastic Cap/Metal Cap
Masonry	Hard Cut Hard Fluted
Exterior – Soffit	Galvanized Common
Exterior – Siding Bevel & Lap Drop & Ship Lap Plywood Hardboard	Aluminum Smooth Siding SS/HDG Spiral Siding Galvanized Hardboard Smooth Siding



Nail Types

Product Information		
APPLICATION	NAIL TYPE	
 Exterior – Decking Patios Outside Projects 	Deck-Lock® D/S Galvanized	
Wood Fencing Fence Staple	Bright/EG/HDG	
Specialty – Underlayment	Brite A/T Underlayment	
Finish/Casing Doors Windows Moulding Furring Paneling Wood	Bright Finish/EG/HDG Bright/EG/HD	
FramingWall FramingSubflooringRoof FramingRoof Sheathing	Bright Common Coated Sinkers	
Drywall Lathing Wall Sheathing Fiberboard Foamboard Gypsum Wallboard	Blued A/T Drywall CC/PC Smooth Drywall Brite A/T Drywall	



SteelLinx Screws

The main advantage of using screws over nails is that they can be reused.

In addition to head type and head shape, screws are also classified by their length in inches, how close their threads are together, their size and thread gauge, and the diameter of the screw shaft. Rated by numbers 2-24, the higher the number, the larger the screw. Choosing the proper screw widely depends on the application. In decking, for instance, composite deck screws prevent splitting and mushrooming in tough decking materials and can be found in colors that match the decking. Collated screws are tough, reliable fasteners used for common applications like drywall, roof tile, decking, and sub-floor.

Screw Types Available:

Decking • Sub-Floor • Drywall





Ordering Information

Service Levels & Supply Chain

- Low order minimums for BlueLinx customer drop ships
- Weekly route trucks
- Flexibility to order what you need
- Reduce on-hand inventory, increasing your inventory turns
- Increase sales and in-stock position with frequent deliveries of the right product
- Please call for special order lead time and pricing

Sales Support Materials

- Contact your local representative to receive sales support materials.
- SteelLinx Brand is a BlueLinx branded product that you can count on for quality!



Screw Types

As part of one of the nation's largest distributors of building products, SteelLinx offers a fastening solution for virtually every application. And because we know you can't wait, SteelLinx assures complete shipping and just-in-time inventory support.

Product Information		
APPLICATION	PROFILE	SCREW TYPE
Drywall – Gypsum Wallboard 20-25 Gauge Metal Studs		Fine Thread, Bugle Head, Phosphate Sharp Point
Drywall – Wood Trim to Metal Studs & Wood		Trim Head, Sharp Point
Metal Stud to Metal Track 20-25 Gauge to Track	[2000-	Pan Head Framing, Sharp Point
Metal Lath 20-25 Gauge Metal Studs 	(amma)	Phillips Modified Truss Head, Sharp Point
Wood – Gypsum Wallboard to Wood Studs		Coarse Thread, Bugle Head, Sharp Point, Phosphate, Clear Zinc or Yellow Zinc Coated
Wood – Particleboard & Softwood		Deep Coarse Thread, Flat Head, Sharp Point
Cement Board – Cement Board Screw 12-20 Gauge Metal Studs		Reinforced Neck w/Countersunk Nibs, Self-Drilling Point
Cement Board – Cement Board Screw 20-25 Gauge Metal Studs or Wood		Reinforced Neck w/Countersunk Nibs, High and Low Threads, Type "S" Pinch Point, Corrosion-Resistant
Decking – Outside Structures Playground Equipment	► ·····	Ceramic-Coated Deck Screws, Stainless-Steel Deck Screws
Metal – Gypsum Wallboard Insulation or Wood to 14-20 Gauge Metal Studs	► <u></u> ►	Fine Thread, Self-Drilling Point, Phosphate or Zinc Coated
Metal – Metal Studs Track and Fixtures 14-20 Gauge	(mo	Pan Head Framing, Drill Point
Composite Deck Screws	j	Square Drive, Anti- Mushrooming Head, Dual Thread, Multi- Coated, Sharp Point

Screw Types

SPECIAL ORDER

Product Information		
LENGTH	PIECES	DESCRIPTION
20 Boxes per Master Carton2-1/2"	75	Gray, Brown, Redwood, Dark Brown
 8 Boxes per Master Carton 2-1/2" 3" 	350 350	Gray, Brown, Redwood, Dark Brown Gray, Brown, Redwood, Dark Brown
Individual Buckets 2-1/2" 3"	1,750 1,750	Gray, Brown, Redwood, Dark Brown Gray, Brown, Redwood, Dark Brown
Project Pack 2-1/2" 3"	350 350	Comp Stainless Deck Screw Comp Stainless Deck Screw
Contractor Pack 2-1/2" 3"	1,750 1,750	Comp Stainless Deck Screw Comp Stainless Deck Screw

Our composite deck screws not only prevent splitting and mushrooming in tough decking materials, we also offer our complete line in a variety of colors to match your decking.



MAN





<complex-block><complex-block>

Ordering from BlueLinx is that simple.

We've eliminated the confusing search for you by dividing our products into 10 categories. Get everything you need on one truck.

Call BlueLinx and get back to business!



Sales: 888-502-BLUE • www.BlueLinxCo.com

LET BLUELINX BE YOUR WAREHOUSE



Take care of your packaging needs with one phone call.

1-800-839-2588

Move.

Protect.

Strapping: steel, plastic, and woven Tools, buckles and seals Cardboard corner protectors Pallet covers and sheets Corrugated boxes in various sizes Specialty boxes (dish, wardrobe) Cushion wrap Stretch film

Ship.

Corrugated boxes in various sizes Cushion wrap Stretch film Mailing tubes



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

Specialty Lumber & Flooring

S4S Pine Boards
Pattern Stock
Premium Boards
Hardwood Boards
Stepping
Flooring Products & Beaded Ceiling
Furring Strips
Shims, Bridging, & Lath
Cedar Products
Woodtone RealTrim Plus

Pine Boards & Pattern Stock

Popular indoors

Did you know that there are more than 100 species of pine? For the purpose of residential and commercial construction, pine boards are a popular choice for indoor projects such as floors, roofing, paneling, furniture, and window frames. Pattern stock boards in particular are usually milled in such a way to be connected edge to edge, making them an excellent choice for flooring.

Boards

#2 Ponderosa Pine Boards (Plum Creek)

ITEM #	SIZE	DESCRIPTION
PTL	1" X 4" X 8'-16'	#2 PONDEROSA PINE BOARDS
PTL	1" X 6" X 8'-16'	#2 PONDEROSA PINE BOARDS
PTL	1" X 8" X 8'-16'	#2 PONDEROSA PINE BOARDS
PTL	1" X 10" X 8'-16'	#2 PONDEROSA PINE BOARDS
PTL	1" X 12" X 8'-16'	#2 PONDEROSA PINE BOARDS

#2 White Wood Boards

ITEM #	SIZE	DESCRIPTION
PTL	1" X 4" X 8'-16'	#2 WHITE WOOD BOARDS
PTL	1" X 6" X 8'-16'	#2 WHITE WOOD BOARDS
PTL	1" X 8" X 8'-16'	#2 WHITE WOOD BOARDS
PTL	1" X 10" X 8'-16'	#2 WHITE WOOD BOARDS
PTL	1" X 12" X 8'-16'	#2 WHITE WOOD BOARDS

#3 Ponderosa Pine Boards

ITEM #	SIZE	DESCRIPTION
PTL	1" X 4" X 8'-16'	#3 PONDEROSA PINE BOARDS
PTL	1" X 6" X 8'-16'	#3 PONDEROSA PINE BOARDS
PTL	1" X 8" X 8'-16'	#3 PONDEROSA PINE BOARDS
PTL	1" X 10" X 8'-16'	#3 PONDEROSA PINE BOARDS
PTL	1" X 12" X 8'-16'	#3 PONDEROSA PINE BOARDS



Ponderosa Pine Pattern Stock ITEM # SIZE

DESCRIPTION

PTL	1" X 6" X 8'-16'	P.P. #2 COMMON S-DRY S2S PATTERN WP-116/WP-4
PTL	1" X 8" X 8'-16'	P.P. #2 COMMON S-DRY S2S PATTERN WP-116/WP-4
PTL	1" X 8" X 8'-16'	P.P. #2 COMMON S-DRY S2S PATTERN WP-116

*PTL Denotes Pulled to Length units

SYP Pattern Stock

ITEM #	SIZE	DESCRIPTION
224408	1" X 6" X 8'	D PATTERN 116
224409	1" X 6" X 10'	D PATTERN 116
224410	1" X 6" X 12'	D PATTERN 116







Premium Boards

Long-lasting quality

What are the characteristics of a premium board vs. a standard board? Whether quality pine or primed, these boards are timetested and boast distinct knots and flat grain, better stability, and less shrinkage and swelling than most other wood products. You may also count on premium boards to be milled from large timbers and have unmatched natural character.

C & Better Pine Boards

ITEM #	SIZE	DESCRIPTION
611492	1" X 4"	R/L RADIATTA PINE C & BETTER/L R KD S4S(250' BF)
611493	1" X 6"	R/L RADIATTA PINE C & BETTER/L R KD S4S(250' BF)
611494	1" X 8"	R/L RADIATTA PINE C & BETTER/L R KD S4S(250' BF)
611495	1" X 10"	R/L RADIATTA PINE C & BETTER/L R KD S4S(250' BF)
611496	1" X 12"	R/L RADIATTA PINE C & BETTER/L R KD S4S(250' BF)
654995	5/4" X 4"	R/L RADIATTA PINE C & BETTER KD S4S (250' BF)
654996	5/4" X 6"	R/L RADIATTA PINE C & BETTER KD S4S (250' BF)
654997	5/4" X 8"	R/L RADIATTA PINE C & BETTER KD S4S (250' BF)
654998	5/4" X 10"	R/L RADIATTA PINE C & BETTER KD S4S (250' BF)
654999	5/4" X 12"	R/L RADIATTA PINE C & BETTER KD S4S (250' BF)
600216	1" X 4"	R/L PONDEROSA PINE C & BETTER KD S4S
600217	1" X 6"	R/L PONDEROSA PINE C & BETTER KD S4S
600218	1" X 8"	R/L PONDEROSA PINE C & BETTER KD S4S
600219	1" X 10"	R/L PONDEROSA PINE C & BETTER KD S4S
600220	1" X 12"	R/L PONDEROSA PINE C & BETTER KD S4S



Arauco

Outstanding structural properties

Boasting excellent strength and made from sustainable plantation forests, AraucoPly[®] boards are available in a wide range of thicknesses and surface treatments. All AraucoPly sanded panels are laid up on a composed core using phenol formaldehyde resin and 100% plantation grown radiata pine, featuring six or fewer wood patch repairs per face. No synthetic repairs needed.

C & Better FJ Primed Boards

ITEM #	SIZE	DESCRIPTION
110888	1" X 4" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
110891	1" X 6" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
110911	1" X 8" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
110928	1" X 10" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
110935	1" X 12" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
111129	5/4" X 4" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
111131	5/4" X 6" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
111135	5/4" X 8" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
111163	5/4" X 10" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED
111167	5/4" X 12" X 16'	FJ RADIATTA PINE ARAUCO TWIN COAT PRIMED





DESCRIPTION

DESCRIPTION

DESCRIPTION

R/L POPLAR KD S4S (250 BF) 8'-16' R/L POPLAR KD S4S (250 BF) 8'-16'

R/L RED OAK KD S4S (250 BF) 8'-16' R/L RED OAK KD S4S (250 BF) 8'-16'

R/L RED OAK KD S4S (250 BF) 8'-16' R/L RED OAK KD S4S (250 BF) 8'-16' R/L RED OAK KD S4S (250 BF) 8'-16'

Hardwood Boards

Poplar

ITEM #	SIZE
266357	1" X 4"
266853	1" X 6"
266855	1" X 8"
266861	1" X 10"
266871	1" X 12"

Red Oak

ITEM #	SIZE
266874	1" X 4"
266880	1" X 6"
266902	1" X 8"
266906	1" X 10"
266908	1" X 12"

Primed Poplar

ITEM #	SIZE
266911	1" X 4" X 16'
266921	1" X 6" X 16'
266923	1" X 8" X 16'
266935	1" X 10" X 16'
266982	1" X 12" X 16'

PRIMED POPLAR KD S4S PRIMED POPLAR KD S4S PRIMED POPLAR KD S4S PRIMED POPLAR KD S4S PRIMED POPLAR KD S4S





Stepping

Select BN SYP Stepping

ITEM #	SIZE	DESCRIPTION
124983	5/4" X 12" X 10'	Select BN SYP STEPPING
125255	5/4" X 12" X 12'	Select BN SYP STEPPING
125422	5/4" X 12" X 14'	Select BN SYP STEPPING
125571	5/4" X 12" X 16'	Select BN SYP STEPPING

#1 BN SYP Stepping

ITEM #	SIZE	DESCRIPTION
689995	2" X 12" X 14'	#1 BN SYP STEPPING
689996	2" X 12" X 16'	#1 BN SYP STEPPING

#2 BN SYP Stepping

ITEM #	SIZE	DESCRIPTION
350771	5/4" X 12" X 12'	#2 BN SYP STEPPING
350773	5/4" X 12" X 14'	#2 BN SYP STEPPING
350774	5/4" X 12" X 16'	#2 BN SYP STEPPING



Unit Board Footage

Product \$	Specificati	ions								
Nominal	Board Footage						Board	Dry		
Board Size	6'	8'	10'	12'	14'	16'	18'	20'	Footage Factors	Surfaced Size
1 x 2	1.00	1.33	1.67	2.00	2.33	2.67	3.00	3.33	0.1667	3/4 x 1-1/2
1 x 3	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00	0.2500	3/4 x 2-1/2
1 x 4	2.00	2.67	3.33	4.00	4.67	5.33	6.00	6.66	0.3330	3/4 x 3-1/2
1 x 6	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	0.5000	3/4 x 5-1/2
1 x 8	4.00	5.33	6.67	8.00	9.33	10.67	12.00	13.33	0.6667	3/4 x 7-1/4
1 x 10	5.00	6.67	8.33	10.00	11.67	13.33	15.00	16.66	0.8333	3/4 x 9-1/4
1 x 12	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	1.0000	3/4 x 11-1/4
5/4 x 2	1.25	1.66	2.09	2.50	2.91	3.33	3.75	4.16	0.2080	1 x 1-1/2
5/4 x 3	1.88	2.50	3.13	3.75	4.38	5.00	5.62	6.25	0.3120	1 x 2-1/2
5/4 x 4	2.50	3.33	4.16	5.00	5.83	6.66	7.50	8.32	0.4160	1 x 3-1/2
5/4 x 6	3.75	5.00	6.25	7.50	8.75	10.00	11.25	12.50	0.6250	1 x 5-1/2
5/4 x 8	5.00	6.66	8.33	10.00	11.66	13.33	15.00	16.66	0.0833	1 x 7-1/4
5/4 x 10	6.25	8.33	10.41	12.50	14.68	16.66	18.75	20.82	1.0410	1 x 9-1/4
5/4 x 12	7.50	10.00	12.50	15.00	17.50	20.00	22.50	25.00	1.2500	1 x 11-1/4
2 x 2	2.00	2.67	3.33	4.00	4.67	5.33	6.00	6.66	0.3333	1-1/2 x 1-1/2
2 x 3	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	0.5000	1-1/2 x 2-1/2
2 x 4	4.00	5.33	6.67	8.00	9.33	10.67	12.00	13.33	0.6667	1-1/2 x 3-1/2
2 x 6	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	1.0000	1-1/2 x 5-1/2
2 x 8	8.00	10.67	13.33	16.00	18.67	21.33	24.00	26.66	1.3333	1-1/2 x 7-1/4
2 x 10	10.00	13.33	16.67	20.00	23.33	26.67	30.00	33.33	1.6667	1-1/2 x 9-1/4
2 x 12	12.00	16.00	20.00	24.00	28.00	32.00	36.00	40.00	2.0000	1-1/2 x 11-1/4
4 x 4	8.00	10.67	13.33	16.00	21.33	21.33	24.00	26.66	1.3330	3-1/2 x 3-1/2
4 x 6	12.00	16.00	20.00	24.00	32.00	32.00	36.00	40.00	2.0000	3-1/2 x 5-1/2
4 x 8	16.00	21.33	26.67	32.00	37.33	42.67	48.00	53.33	2.6667	3-1/2 x 5-1/2
6 x 6	18.00	24.00	30.00	36.00	42.00	48.00	54.00	60.00	3.0000	5-1/2 x 5-1/2
6 x 8	24.00	32.00	40.00	48.00	56.00	64.00	72.00	80.00	4.0000	5-1/2 x 7-1/2

FUP

(LF) Lineal Footage x Factor = (BF) Board Footage • (BF) Board Footage Divided by Factor = (LF) Lineal Footage

Flooring

Luxury under foot

Installing floors is a huge undertaking, but selecting the right type – hardwood, laminate, or ceramic tile – is your first challenge. Ask yourself a few questions before getting caught up in a certain look or style: How much traffic will the floor endure? Will the floor get wet occasionally? Can area rugs account for some of the space or do you want a floor that stands on its own in appearance? Versatile and attractive, Douglas Fir provides a tough finish while maintaining its look under extreme wear. The reddish tan color of Red Oak gives the room a warm glow and is more traditional in appearance.



Flooring and Beaded Ceiling

Doug Fir Flooring

ITEM #	SIZE	DESCRIPTION
371954	1" X 4"	R/L C & BETTER DOUG FIR MIXED GRAIN T&G FLOOR (1250 BDFT)

Doug Fir Beaded Ceiling

 ITEM #
 SIZE
 DESCRIPTION

 691006
 5/8" X 4"
 R/L C & BETTER DOUG FIR MIXED GRAIN BEADED CEILING (1250 BDFT)



SYP D Flooring/Beaded Ceiling

ITEM #	SIZE	DESCRIPTION
543719	1" X 4" X 8'	D SYP FLOORING/BEADED CEILING (96/UNIT)
562665	1" X 4" X 10'	D SYP FLOORING/BEADED CEILING (96/UNIT)
543720	1" X 4" X 12'	D SYP FLOORING/BEADED CEILING (96/UNIT)

Flooring

Flooring Underlayment Pads

ITEM # PALLET SIZE DESCRIPTION

734708	30 ROLLS	RESISTA LAMINATE UNDERLAYMENT 100SQFT
107560	35 ROLLS	NOISEBLOCK UNDERLAYMENT W/LIP AND TAPE 100 SQ FT
107595	25 ROLLS	ABSORBASOUND UNDERLAYMENT 100 SQ FT
124021	25 ROLLS	SOUNDOFF SELF SEAL
124014	30 ROLLS	REPROSOUND SELF SEAL
113407	40 ROLLS	DUOFOAM - 40" WIDE ROLLS
123957	40 ROLLS	POLYFOAM UNDERLAYMENT

Plywood Underlayments

ITEM #	PALLET SIZE	DESCRIPTION
734816	80 SHEETS	1/4 48 X 48 ULTRAPLY XL (5.2MM) PREMIUM UNDERLAYMENT 5-PLY
734706	80 SHEETS	1/4 48 X 96 ULTRAPLY XL (5.2MM) PREMIUM UNDERLAYMENT 5-PLY

Tack Strip and Seam Tapes

PALLET SIZE	DESCRIPTION
40 CTNS	DELUXE 7/8" WIDE W/ 3/4" RS WOOD NAIL PROLINE TACK STRIP
40 CTNS	DELUXE 7/8" WIDE W/ 11/16"X12GA CNCR NAIL PROLINE TACK STRIP
36 CTNS	SUPREME 1" WIDE W/ 3/4" RS WOOD NAIL PROLINE TACK STRIP
36 CTNS	SUPREME 1" WD W/ 11/16"X12GA CNCR NAIL PROLINE TACK STRIP
36 CTNS	TRI-TACK 1-3/4" WD 11/16X12GACONCR NAIL PROLINE TACK STRIP
40 CTNS	4" EV180 PROLINE SEAM TAPE (10 ROLLS/CTN)
40 CTNS	4" 185-GN PROLINE SEAMTAPE (10 ROLLS/CTN)
40 CTNS	6" EV180 PROLINE SEAM TAPE (6 ROLLS/CTN)
	40 CTNS 40 CTNS 36 CTNS 36 CTNS 36 CTNS 40 CTNS 40 CTNS

Tools

ITEM # DESCRIPTION

112566	BULLET TOLLSI-13 PRO MAGNUM SHEAR
112579	BULLET TOLLSI-20 PRO MAGNUM SHEAR
112594	BULLET TOLLS MAGSHEAR LITE
258158	LEICA LINO L2 CROSS LINE LASER # 757225
258199	LEICA DISTO D2 HANDHELD LASER DISTANCE METER
258235	LEICA DISTO D3 HANDHELD LASER DISTANCE METER

Info Corner:

Essential flooring definitions

- diagonal pattern boards are installed parallel to each other at a 45 degree angle to the walls
- herringbone pattern strips of wood flooring are laid in a diagonal zigzag plan
- plank flooring wide boards that create a linear effect in the room
- parquet pattern installation in a repeated geometric fashion, resulting in a checkboard look
- random installation of mixed boards in a straightforward, parallel pattern
- strip flooring common flooring option that gives a running, linear effect and the illusion of the room being a larger space



Furring Strips

Extra support

Furring refers to the backing surface to support walls or roof materials. Furring strips typically measure 1" x 2", 1" x 3" or 2" x 2". They can be laid out perpendicular to studs or joists and nailed to them, or set vertically against an existing wall surface. The spacing between the strips depends on the type of finishing material. Wider spacing is typically used behind the heavy boards that support ceramic tiles. Closely spaced strips are needed for your thin paneling or plaster jobs.

Furring Strips

_		
ITEM #	SIZE	DESCRIPTION
102358	1" X 2" X 8'	SPF PREMIUM SELECT S-DRY (1200/UNIT)
102624	1" X 3" X 8'	SPF PREMIUM SELECT S-DRY (648/UNIT)
102952	2" X 2" X 8'	SPF PREMIUM SELECT S-DRY (600/UNIT)
102215	1" X 2" X 8'	SPF PREMIUM S-DRY (1200/UNIT)
102246	1" X 2" X 10'	SPF PREMIUM S-DRY (1200/UNIT)
108565	1" X 2" X 12'	SPF PREMIUM S-DRY (1200/UNIT)
108598	1" X 2" X 16'	SPF PREMIUM S-DRY (1200/UNIT)
102750	1" X 3" X 8'	SPF PREMIUM S-DRY (648/UNIT)
102782	1" X 3" X 10'	SPF PREMIUM S-DRY (648/UNIT)
102868	1" X 3" X 12'	SPF PREMIUM S-DRY (648/UNIT)
102891	1" X 3" X 16'	SPF PREMIUM S-DRY (648/UNIT)
103031	2" X 2" X 8'	SPF PREMIUM S-DRY (600/UNIT)
116200	2" X 2" X 10'	SPF PREMIUM S-DRY (600/UNIT)
116208	2" X 2" X 12'	SPF PREMIUM S-DRY (600/UNIT)
116227	2" X 2" X 16'	SPF PREMIUM S-DRY (600/UNIT)
116135	1" X 2" X 8'	SPF UTILITY & BETTER S-DRY (1200/UNIT)
116150	1" X 3" X 8'	SPF UTILITY & BETTER S-DRY (648/UNIT)
116175	2" X 2" X 8'	SPF UTILITY & BETTER S-DRY (600/UNIT)

Sinclair Furring Strips

ITEM #	SIZE	DESCRIPTION
631396	1" X 2" X 8'	NECHAKO (1176/UNIT)
631397	1" X 3" X 8'	NECHAKO (840/UNIT)
586071	1" X 4" X 8'	NECHAKO (756/UNIT)




Shims, Bridging, & Lath

Shims

ITEM #	SIZE	DESCRIPTION
148854	16"	EAST WHITE UNDERCOURSE SHINGLES R/W (48 BD/UNIT)
147685	16"	EAST WHITE CEDAR SHIMS 1-1/2" (240 BD/UNIT)
130852	16"	EAST WHITE BUILDERS SHIMS 9/9 R/W (144 BD/UNIT)



ITEM # SIZE DESCRIPTION 116251 1" X 3" BRIDGING FOR 2" X 10" X 12" O.C. (2850 PCS/UNIT) 102701 1" X 3" BRIDGING FOR 2" X 10" X 16" O.C. (2850 PCS/UNIT) 116241 1" X 3" BRIDGING FOR 2" X 10" X 16" O.C. (2850 PCS/UNIT)



Lath

ITEM #	SIZE	DESCRIPTION
218490	3/8" X 1-1/2" X 4'	SPF #1 LATH (50 PC/BD - 80 BD/UNIT)



Cedar Products

Cedar Decking Products

ITEM #	SIZE	DESCRIPTION
PTL	5/4" X 6"	ARCHITECT KNOTTY KD S4S RE DECKING (SELKIRK)
PTL	5/4" X 6"	ARCHITECT KNOTTY GREEN S4S RE DECKING
PTL	2" X 4"	WRC ARCHITECT KNOTTY KD S4S (SELKIRK)
PTL	2" X 6"	WRC ARCHITECT KNOTTY KD S4S (SELKIRK)
PTL	2" X 4"	WRC ARCHITECT KNOTTY GREEN S4S
PTL	2" X 6"	WRC ARCHITECT KNOTTY GREEN S4S



Cedar Boards

ITEM #	SIZE	DESCRIPTION
PTL	1" X 4" - 1" X 12" 8'-16'	INLAND RED CEDAR BOARDS 3 & BTR S-DRY S1S2E (SELKIRK)
PTL	1" X 4" - 1" X 12" 8'-16'	WESTERN RED STANDARD & BTR GREEN BOARDS SIS2E (SAWARNE)

Cedar Dimension

ITEM #	SIZE	DESCRIPTION
PTL	2" X 4" - 2" X 12"	WRC STD & BTR GREEN ROUGH

Cedar Timbers

ITEM #	SIZE	DESCRIPTION
PTL	4" X 4"	WRC APPEARANCE GRADE GREEN S4S POSTS
PTL	4" X 4"	WRC STD & BTR GREEN S4S POSTS
PTL	6" X 6"	WRC #2 & BTR GREEN ROUGH
PTL	6" X 6"	WRC #2 & BTR GREEN S4S

Cedar Balusters

ITEM #	SIZE	DESCRIPTION
691543	2" X 2" - 32"	WRC D & BTR GREEN S4S SE BALUSTERS
336048	2" X 2" - 36"	WRC D & BTR GREEN S4S SE BALUSTERS
626571	2" X 2" - 42"	WRC D & BTR GREEN S4S SE BALUSTERS
619826	2" X 2" - 42"	WRC D & BTR GREEN S4S BEVELED 1E BALUSTERS
626571	2" X 2" - 48"	WRC D & BTR GREEN S4S BEVEL BALUSTERS
298553	2" X 2" - 96"	WRC D & BTR GREEN S4S SE BALUSTERS

Selkirk Cedar Siding

ITEM #	SIZE
111585	11/16" X 6" X 6' - 20'
626212	11/16" X 8" X 6' - 20'
111873	11/16" X 10" X 6' - 20'
PTL	1" X 6" X 10' - 16'
PTL	1" X 10" X 10' - 16'

*PTL denotes pulled to length units

DESCRIPTION

R/L WRC STK S-DRY R/F BEVEL R/L WRC STK S-DRY R/F BEVEL R/L WRC STK S-DRY R/F BEVEL PTL WRC STK SIS T&G PTL WRC STK CHANNEL RUSTIC



Woodtone RealTrim Plus

For archictects, builders, and dealers

RealTrim exemplifies the natural beauty of real wood. RealTrim will provide you with a premium quality product that completes the exterior look on any single or multi-family project. Coupled with a 10-year warranty, the most comprehensive in the industry and the availability of various dimensions and lengths, RealTrim is the dependable choice for architects, builders, and dealers across North America. How is Woodtone different? RealTrim begins with a hand-selected, tight grain, kiln-dried Western SPF, resulting in a premium quality product from start to finish. RealTrim products will provide the perfect complement to any exterior cladding, whether fiber cement, wood, brick, composites, or hardboard.

Trim Products

Woodtone RealTrim Plus Primed Boards

ITEM #	SIZE	DESCRIPTION
734653	1" X 3" - 16'	REALTRIM PREMIUM
625627	1" X 4"-12'	REALTRIM PREMIUM
625626	1" X 4"-16'	REALTRIM PREMIUM
625630	1" X 6"-10'	REALTRIM PREMIUM
627520	1" X 6"-12'	REALTRIM PREMIUM
627522	1" X 6"-16'	REALTRIM PREMIUM
627527	1" X 8"-12'	REALTRIM PREMIUM
627529	1" X 8"-16'	REALTRIM PREMIUM
627534	1" X 10"-16'	REALTRIM PREMIUM
627541	1" X 12"-16'	REALTRIM PREMIUM
627591	5/4" X 4"-16'	REALTRIM PREMIUM
627594	5/4" X 6"-10'	REALTRIM PREMIUM
627597	5/4" X 6"-16'	REALTRIM PREMIUM
627602	5/4" X 8"-10'	REALTRIM PREMIUM
627605	5/4" X 8"-16'	REALTRIM PREMIUM
625647	5/4" X 10"-16'	REALTRIM PREMIUM
625649	5/4" X 12"-16'	REALTRIM PREMIUM

Woodtone RealTrim Plus Primed Dimension

ITEM #	SIZE	DESCRIPTION
627724	2" X 4"-16'	REALTRIM PREMIUM
627728	2" X 6"-12'	REALTRIM PREMIUM
627729	2" X 6"-14'	REALTRIM PREMIUM
627731	2" X 6"-16'	REALTRIM PREMIUM
627740	2" X 8"-16'	REALTRIM PREMIUM
627749	2" X 10"-16'	REALTRIM PREMIUM
627762	2" X 12"-16'	REALTRIM PREMIUM



VISIT BlueLinx

Posts and Accesories

Woodtone RealTrim Plus Primed Posts

ITEM #	SIZE	DESCR
667927	4" X 4" X 8'	REALT
667928	4" X 4" X 10'	REALT
649796	6" X 6"-8'	REALT
649797	6" X 6"-10'	REALT
649798	6" X 6"-12'	REALT
649800	8" X 8"-10'	REALT
649801	8" X 8"-12'	REALT





Woodtone RealTrim Plus Primed Rail Cap

ITEM # SIZE
 733026
 2" X 4"-16'
 REALTRIM RAIL CAP

 732832
 2" X 6"-16'
 REALTRIM RAIL CAP

DESCRIPTION

Woodtone RealTrim Plus Primed Balusters

ITEM #

SIZE DESCRIPTION 666925 2" X 2"-12' REALTRIM BALUSTER

Woodtone RealTrim Plus Primed Corners

691778 4" X 4" X 10' REALTRIM CORNER

ITEM # SIZE DESCRIPTION



LET BLUELINX BE YOUR WAREHOUSE



Get down to e-business!

Focus on your customers, not transactions.

Easy, effective and efficient. Conducting e-business improves business productivity by linking to customers or vendors and exchanging data.

How do you avoid wasting time? Simple. Call BlueLinx!

E-business, the buying and/or selling of goods via electronic means, is easy, effective and efficient. Conducting e-business improves business processes and productivity by linking to trading partners (customers or vendors) and exchanging data.

BlueLinx Corporation currently has applications to process the following electronic transactions for our customers and vendors:

- Purchase orders (inbound and outbound)
- Advanced Shipping Notice
- Payment (inbound)
- Invoices (inbound and outbound)
- Purchase order/confirmation

How is e-business a win-win for both BlueLinx Corporation and its trading partners? Improved productivity. Reduced paperwork. Improved inventory control and management. Improved ability to forecast customer demand. Improved manufacturing efficiency. Improved customer services. Increased competitiveness. Improved data accuracy and integrity. Reduced cost.

Net result, BlueLinx Corporation can exchange information with customers and vendors in minutes instead of days. It offers BlueLinx Corporation and its trading partners a new, more profitable way of doing business.


Ready to get down to e-business? Contact us at BlueLinx_EDI@BlueLinxco.com.

Sales: 888-502-BLUE • www.BlueLinxCo.com





LET BLUELINX BE YOUR WAREHOUSE

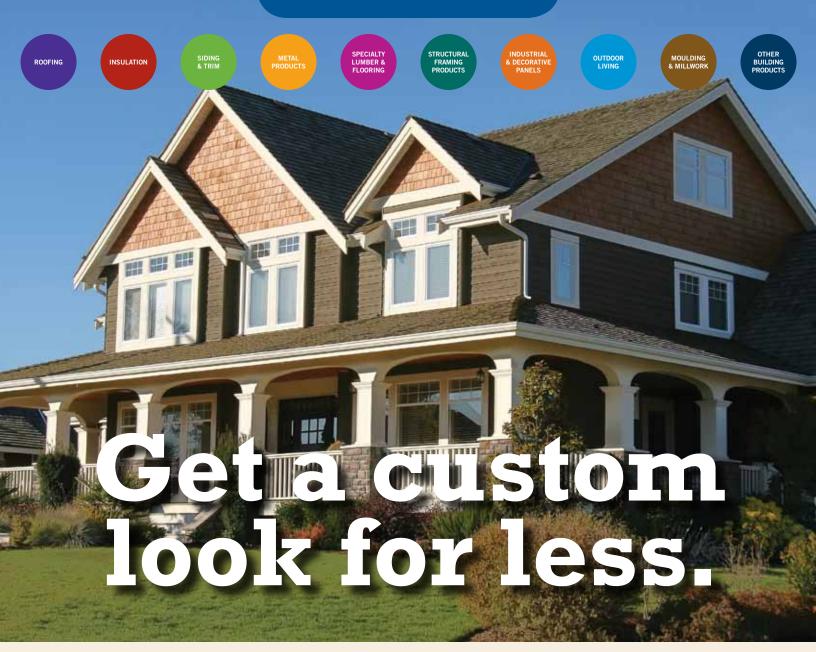

Get ahead of the Joneses.

Differentiate your homes without spending a fortune.

Set yourself apart from your competition with custom items.

Custom moulding, premium siding and trim, architectural columns, exclusive roofing accessories, striking decks and railings...and much more!



Sales: 888-502-BLUE • www.BlueLinxCo.com

Structural Framing Products

Engineered Lumber
LiteSteel Beam
Plywood Siding
Sanded Plywood
Dricon Fire-Treated Plywood
Specialty Plywood
Marine Grade Plywood
Lumber
OSB Sheathing & Underlayment

Engineered Lumber

Smart, affordable, sustainable structure

Generously sized rooms and high ceilings demand building products of uncompromised strength and stability. Engineered Lumber products outperform common grades of lumber and offer a longer life span in primary framing products. Floor joists, rim board, beams, and headers manufactured with Engineered Lumber are lightweight and easy to handle, *and* help eliminate the need for supporting posts in basements, garages, and bonus rooms.

Construction classics

Our formula for the strength and reliability of Engineered Lumber is a combination of natural strengths found in wood with specially formulated adhesives to produce virtually defect-free lumber. This manufacturing process helps minimize shrinking, twisting, and warping. As a result, Engineered Lumber is more consistent and has more load-carrying capacity and spanning ability than conventional lumber.



Why use Engineered Lumber in your next construction project?

- Create open spaces
- Ensure quiet floors with less vibration
- Stabilize floor systems
- Reduce the need for extra structural support
- Maximize ceiling heights




Engineered for performance

When it comes to floor joists, rim board, beams, and headers, builders and contractors choose engineered lumber for many reasons. Today's residential building trends call for large, open spaces, and high ceilings, creating a demand for products that provide higher strength and greater stability over long spans.

LVL

Engineered lumber provides the following benefits:

- More open spaces
- Quieter floors and less vibration D
- A flat, level, more stable floor system
- Environmentally responsible

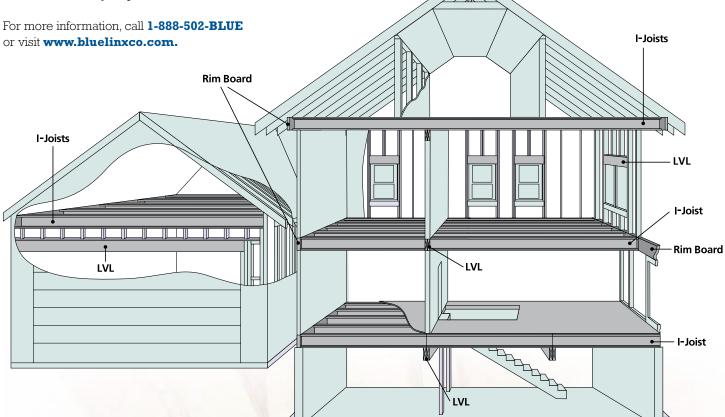



Rely on a superior performer



A. I-Joists

Lightweight and cost-effective, Solid Sawn Flanges and LVL Flanges Series I-joists are the builder's choice for residential floor and roof systems. Additionally, BlueLinx carries joists with an expanded depth for larger projects and commercial applications. A wide selection of sizes and flange choices make it easy to specify the materials that are right for the homes you build, whether they're smaller tract homes or custom plans.



Available depths and lengths: 24', 28', 32', 36', 40', 44' and 48'. Lengths up to 60' may be special ordered.



B. Laminated Veneer Lumber

LVL is used as primary support beams in floor, roof, and wall structures. This high-grade product is ideally suited for floor systems configured with I-joist products. LVL provides superior strength over long spans and reduces the need for support posts and features a sealant to provide short-term protection from moisture damage during the construction cycle that can cause splits, cupping, and warping.

Available in two thicknesses: 3½" one-piece member helps reduce installation time; 1¾" member for versatility. Value lengths of 24', 28', 32', 36', 40', 44', and 48'. Lengths up to 60' may be special ordered.



C. Rim Board

Rim Board completes the Engineered Lumber flooring system. The manufacturing process produces properties that allow designs with excellent seismic and wind-resistance performance. Our proven edge- and end-coating process for moisture resistance virtually ensures dimensional stability and job site durability. Manufactured to match the depths of I-joists, it serves as perimeter closure both parallel and perpendicular to floor joists and is used to transfer both vertical and lateral loads. When properly attached to ends of joists, Rim Board helps to prevent rotation and provides perimeter nailing for floor sheathing.

Sizes and Weights					Sizes and Weights
Depth	9-1/2"	11-7/8"	14"	16"	Thickness 1-1/8"
Weight (PLF)	3.0	3.7	4.4	5.0	Length 12'

Loads

- Vertical Load: Rim doublerstarter joist, or starter joist with blocking, supports 24" o.c., 4,850 PLF
- ▶ Horizontal Load: Lateral seismic or wind load, 200 PLF using a load duration factor of 160%. With 1/2" lag or through bolt attaching ledger to rim board, 350 lbs. lateral load per bolt
- Lateral load for nails in wide face of rim board: Design per 1997 NDS using Douglas Fir-Larch values

Today's Project

Floors: Fuse beauty with safety

Floors can be eye-catching hardwood, laminate, ceramic, vinyl sheet, vinyl tile, or linoleum. A beautiful floor complements and enhances a room. But is it safe and sturdy?

When used as part of a flooring system, I-joists can help floors stay quiet over time, reducing bothersome and costly callbacks. Conventional lumber can shrink, twist, and warp as the moisture found naturally in the wood evaporates. Floors can bow, nails

pull away from the joists, and the floor decking slides up and down against the nails, creating annoying squeaks. In contrast, I-joists are more stable by design. The wide flange helps reduce vibration, creating a firmer-feeling floor. I-joists are produced at lower moisture content, thereby minimizing the effects of shrinking, twisting, and warping.

Did you know?

A stiffer floor will result from using a live load deflection limit of L/480 versus the code minimum of L/360. A roof system with less total load deflection than the code required L/180 may be achieved by using an L/240 criterion.

In addition to more stringent deflection limits, several other factors may improve overall floor performance. Reducing joist spacing and/or increasing the subfloor thickness will lessen deflection between adjacent joists and increase load sharing. For increased floor stiffness, gluing the

subfloor to the joists is recommended before nailing or screwing rather than nailing only. Vibrations may occur in floor systems with very little dead load, as in large empty rooms. A gypsum wallboard ceiling attached to the bottom of the joists will generally dampen vibration as will interior partition walls running perpendicular to the joists.





Engineered Lumber

I-Joist

SOLID SAWN FLANGE - AVAILABLE 2' INCREMENTS Up TO 44', AND 48'

PCS/UNIT	SIZE	DESCRIPTION
33	9-1/2' X 2.5"	WI40 (PRI40)
33	11-7/8' X 2.5"	WI40 (PRI40)
33	14' X 2.5"	WI40 (PRI40)
33	11-7/8' X 2.5"	WI60 (PRI60)
33	14' X 2.5"	WI60 (PRI60)
33	16' X 2.5"	WI60 (PRI60)
24	11-7/8' X 3.5"	WI80 (PRI80)
24	14' X 3.5"	WI80 (PRI80)
24	16' X 3.5"	WI80 (PRI80)

WI80 18' & 20', WI85 22' & 24', AVAILABLE BY QUOTATION.

LVL - 2.0E, 2900 Fb - Sealed 6 Sides

PCS/ UNIT	SIZE	DESCRIPTION
60	1-1/2" x 3-1/2'	2.0E LVL ALSO AVAILABLE IN 92 5/8" & 104 5/8" PET LENGTHS.
40	1-1/2" x 5-1/2'	2.0E LVL ALSO AVAILABLE IN 92 5/8" & 104 5/8" PET LENGTHS.
30	1-3/4" x 7-1/4'	2.0E LVL
25	1-3/4" x 9-1/4'	2.0E LVL
25	1-3/4" x 9 /12'	2.0E LVL
20	1-3/4" x 11-1/4'	2.0E LVL
20	1-3/4" x 11-7/8'	2.0E LVL
15	1-3/4" x 14'	2.0E LVL
15	1-3/4" x 16'	2.0E LVL
10	1-3/4" x 18'	2.0E LVL
10	1-3/4" x 23-7/8'	2.0E LVL UP TO 32' IN 2' INCREMENTS, THEN 48' ONLY





APA Rim Board x 12'

ITEM #	PCS/UNIT	SIZE	DESCRIPTION
561749	50	1-1/8" X 9-1/2'	RIM BOARD
561753	40	1/8" X 11-7/8'	RIM BOARD
561755	30	1/8" X 14'	RIM BOARD
561758	30	1/8" X 16'	RIM BOARD

1.8E, 2400Fb, Doug Fir Glulam Garage Door Headers

ITEM #	PCS/ UNIT	SIZE	DESCRIPTION
527846	6	3-1/2" X 9" 9'9"	GARAGE DOOR HEADERS
527845	6	3-1/2" X 12" 16'9"	GARAGE DOOR HEADERS
597642	6	3-1/2" X 13-1/2" 16'9"	GARAGE DOOR HEADERS
527405	6	3-1/2" X 15" 18'9"	GARAGE DOOR HEADERS



LiteSteel Beam

LiteSteel Beam

LiteSteel Beam is a revolutionary new product that was developed in response to the demand for a light structural beam with the strength of steel, but with the installation workability normally associated with wood products. LSB[®] is a structural beam suitable for use in both wood- and steel-framed residential and light commercial construction projects. It can be used in a variety of applications including floor and bearer beams, basement beams, garage beams, long span headers and lintels, roof and ridge beams, fascia, and mezzanine flooring.

LiteSteel Beam – In Stock

BEAM SIZE 800LSB250-98 1000LSB300-098 1000LSB300-118 1200LSB350-118 1200LSB350-134 1400LSB350-134 DESCRIPTION NOMINAL 8" X 2-1/2" X .098 NOMINAL 10" X 3" X .098 NOMINAL 10" X 3" X .118 NOMINAL 10" X 3-1/2" X .118 NOMINAL 12" X 3-1/2" X .118 NOMINAL 14" X 3-1/2" X .118 NOMINAL 14" X 3-1/2" X .118 NOMINAL 14" X 3-1/2" X .134 *See actual sizes in chart below



Stock 16', 20', 24', 40'; cut to size available



Product Specifications							
Beam Size	Depth (inches)	Flange Width (inches)	Thickness (inches)	Wt/Ft (pounds)	Bundle Size	Bundle Weight	Bundles per T/L
1400LSB350-134	13.78	3.5	0.134	13.00	8 pieces	4,160	10
1400LSB350-118	13.78	3.5	0.118	11.50	8 pieces	3,680	11
1200LSB350-134	11.81	3.5	0.134	12.10	8 pieces	3,872	10
1200LSB350-118	11.81	3.5	0.118	10.70	8 pieces	3,424	12
1000LSB300-118	9.84	2.95	0.118	8.88	8 pieces	2,842	14
1000LSB350-98	9.84	2.95	0.98	7.47	8 pieces	2,390	17
800LSB250-98	7.87	2.36	0.98	5.89	16 pieces	3,770	10

CALL BlueLinx

LiteSteel Beam Product Benefits

Easily cut to length using only hand tools

Can be cut, drilled, screwed, bolted, welded, and nailed with standard tools.

Attachments by common screws – no welding!

- Robust spanning capacity in a lightweight beam
- LSB has G-60 coating for superior corrosion protection
- ▶ 40% lighter than hot rolled steel or engineered wood of same spanning capacity
- Does not warp or twist
- Resistant to rot, mold, and termites
- Saves time and money by eliminating the need for a crane
- Green average of 65% or more recycled content



LSB Load Table

Beam Size				Total Lo	ads (lbs/ft)	Most restric	tive Simple:	Beam or Cor	ntinuous Sp	ban		
					Tot	al Load =	75%LL+2	5%DL				
	Deflection = <live 240<="" 360="" deflection="<" load="" th="" total=""></live>											
						Beam S	Span, Feet					
	4	6	8	10	12	14	16	18	20	24	28	32
1400LSB350-134	7649	5099	3824	3059	2550	2033	1549	1088	793	459	289	194
1400LSB350-118	5291	3527	2645	2116	1764	1512	1323	967	705	408	257	172
1200LSB350-134	7649	5099	3824	3059	2287	1627	1090	765	558	323	203	136
1200LSB350-118	5940	3960	2970	2376	1980	1421	952	668	487	282	178	119
1000LSB300-118	5940	3960	2970	1958	1281	807	541	380	277	160	101	68
1000LSB350-98	4097	2731	2049	1632	1096	690	462	325	237	137	86	58
800LSB250-98	4097	2731	1647	956	553	348	233	164	119	69	44	



Plywood Siding

Decades of use

A type of wood siding that can be produced from four types of tree species, plywood sidings, if properly maintained, can last more than 30 years. Many synthetic materials have been developed to replace wood, but the choice of wood siding or their substitutes should be considered with the climate factor in mind. For instance, some varieties such as redwood are resistant to winds, but can get damaged by moisture. Synthetic materials provide good protection, but do not display the same texture and design maturity as wood. The pricing of wood siding materials is different in each market. Customers who want wood-sided homes that use cedar will pay more, but the maintenance cost less. Proper maintenance of plywood siding includes power washing, sealing, staining, and polishing with proper varnishes.

Beaded Plywood SIZE

ITEM #

DESCRIPTION

720467	11/32" X 48" X 96"
102227	11/32" X 48" X 96"
538281	11/32" X 48" X 96"
409603	11/32" X 48" X 96"

RADIATA PINE NATLBEAD 2"OC ARAUCO RADIATA PINESTAR BEAD 2"OC ARAUCO 1.6" OC PINE PLYBEAD CLASSIC 3.5" OC PINE PLYBEAD

Rough Sawn

ITEM #	SIZE
720463	11/32" X 48" X 96"
127667	11/32" X 48" X 96"

DESCRIPTION RADIATA RS SDG NG SE 303-6 ARAUCO ROUGH SAWN FIR SOUND GRADE

AraucoPly Siding

T1-11 ITEM #

SIZE

DESCRIPTION

720468	19/32" X 48" X 96"	RADIATA RS SDG 4"OC 303-6 ARAUCO
720453	19/32" X 48" X 96"	RADIATA RS SDG 8"OC 303-6 ARAUCO
720470	19/32" X 48" X 108"	RADIATA RS SDG 4"OC 303-6 ARAUCO
720456	19/32" X 48" X 108"	RADIATA RS SDG 8"OC 303-6 ARAUCO
157755	19/32" X 48" X 96"	T1-11 4"OC FIR SOUND GRADE
186694	19/32" X 48" X 96"	T1-11 8"OC FIR SOUND GRADE
403331	19/32" X 48" X 108"	T1-11 4"OC FIR SOUND GRADE
100289	19/32" X 48" X 108"	T1-11 8"OC FIR SOUND GRADE
177189	19/32" X 48" X 96"	4"OC PINE SDG T1-11 PREMIUM GRADE
113699	19/32" X 48" X 96"	8"OC PINE SDG T1-11 PREMIUM GRADE
193519	19/32" X 48" X 96"	4"OC PINE SDG T1-11 DECORATIVE GRADE
119031	19/32" X 48" X 96"	8"OC PINE SDG T1-11 DECORATIVE GRADE

Reverse Board & Batten

ITEM #	SIZE	
102153	19/32" X 48" X 96"	
102165	19/32" X 48" X 108"	
117579	19/32" X 48" X 96"	
118832	19/32" X 48" X 108"	
172564	19/32" X 48" X 96"	
193247	19/32" X 48" X 96"	

DESCRIPTION

RADIATA RS SDG 12"OC RBB 303-6 ARAUCO RADIATA RS SDG 12"OC RBB 303-6 ARAUCO RB&B 12"OC FIR SOUND GRADE RB&B 12"OC FIR SOUND GRADE RB&B 12"OC PINE PREMIUM GRADE RB&B 12"OC PINE DECORATIVE GRADE



Sanded Plywood



Sanded plywood is used in a wide variety of applications.

Interior uses include cabinetry, furniture manufacturing, paneling, and shelving. Exterior uses include specialty construction and industrial applications such as fences, soffits, truck and boxcar linings, commercial refrigerators, and other applications in which exposure to high moisture is anticipated and smoothness and/or appearance are important. Sanded plywood is available in several grades, which are based on the grade of the veneers and the panel construction.

AA, AB & AC Fir

ITEM #	SIZE	DESCRIPTION
164197	23/32" X 48" X 96"	AA FIR EXTERIOR
157475	15/32" X 48" X 96"	AB FIR EXTERIOR
116679	1/4" X 48" X 96"	AC FIR EXTERIOR
191932	11/32" X 48" X 96"	AC FIR EXTERIOR
166541	15/32" X 48" X 96"	AC FIR EXTERIOR
192003	19/32" X 48" X 96"	AC FIR EXTERIOR
135407	23/32" X 48" X 96"	AC FIR EXTERIOR
167329	23/32" X 48" X 120"	AC FIR EXTERIOR

AC Fir Superply

ITEM #	SIZE
341008	1/4" X 48" X 96"
341009	11/32" X 48" X 96"
338555	15/32" X 48" X 96"
357143	19/32" X 48" X 96"
338557	23/32" X 48" X 96"

DESCRIPTION

AC FIR EXTERIOR SUPERPLY AC FIR EXTERIOR SUPERPLY AC FIR EXTERIOR SUPERPLY AC FIR EXTERIOR SUPERPLY AC FIR EXTERIOR SUPERPLY

Arauco AC Pine

ITEM #	SIZE
720454	1/4" X 48" X 96"
720460	11/32" X 48" X 96"
720458	15/32" X 48" X 96"
720455	19/32" X 48" X 96"
720459	23/32" X 48" X 96"
720472	31/32" X 48" X 96"

DESCRIPTION

AC U/L RADIATA 3PLY S2S AC U/L RADIATA 3PLY S2S AC U/L RADIATA 5PLY S2S AC U/L RADIATA 5PLY S2S AC U/L RADIATA 7PLY S2S AC U/L RADIATA 9PLY S2S



Whatever the project – from flooring and siding to sheathing and interior wainscot – count on BlueLinx for quality panels.

AC Pine

ITEM #	SIZE
272216	1/4" X 48" X 96"
272217	11/32" X 48" X 96"
272218	15/32" X 48" X 96"
272219	19/32" X 48" X 96"
272220	23/32" X 48" X 96"

DESCRIPTION

AC PINE EXTERIOR UNDERLAYMENT AC PINE EXTERIOR UNDERLAYMENT AC PINE EXTERIOR UNDERLAYMENT AC PINE EXTERIOR UNDERLAYMENT AC PINE EXTERIOR UNDERLAYMENT

BC Pine

ITEM #	SIZE
272211	1/4" X 48" X 96"
272212	11/32" X 48" X 96"
272213	15/32" X 48" X 96"
272214	19/32" X 48" X 96"
272215	23/32" X 48" X 96"

DESCRIPTION BC PINE EXTERIOR UNDERLAYMENT BC PINE EXTERIOR UNDERLAYMENT BC PINE EXTERIOR UNDERLAYMENT BC PINE EXTERIOR UNDERLAYMENT

BC PINE EXTERIOR UNDERLAYMENT

BBOES

 ITEM #
 SIZE


 165225
 23/32" X 48" X 96"

DESCRIPTION BB PINE PLYFORM OIL & EDGE SEALED

Info Corner:

Why wood? Why Arauco?

Arauco's wood is exclusively sourced from sustainably managed forest plantations. Arauco owns 807,000 acres of native forest that are permanently protected under strict international regulations and management standards defined by Bioforest. The company also uses a sulfate-based chemical manufacturing process, also known as the "kraft" process, for the production of its pulp. Wood is first chipped, and then treated with chemicals in order to separate the fiber from the lignin. The kraft process yields pulp with excellent mechanical resistance properties due to the fact that fiber suffers minimum damage when separated. Moreover, the chemical agents used in this process can be recovered and recycled continuously.

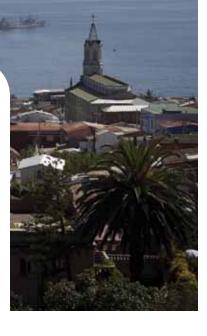



SYP Sheathing & Underlayment

ITEM #	SIZE	DESCRIPTION
112590	11/32" X 48" X 96"	SYP RATED SHEATHING
132411	15/32" X 48" X 96"	3-PLY SYP RATED SHEATHING
184200	15/32" X 48" X 96"	4-PLY SYP RATED SHEATHING
195482	19/32" X 48" X 96"	SYP RATED SHEATHING
157946	23/32" X 48" X 96"	SYP RATED SHEATHING
605188	19/32" X 48" X 96"	SYP STURD-I-FLOOR RATED SHEATHING SE
605187	19/32" X 48" X 96"	SYP STURD-I-FLOOR RATED SHEATHING T&G
605190	23/32" X 48" X 96"	SYP STURD-I-FLOOR RATED SHEATHING SE
161308	23/32" X 48" X 96"	SYP STURD-I-FLOOR RATED SHEATHING T&G
605189	23/32" X 48" X 96"	GP SYP STURD-I-FLOOR RTD SHEATHING T&G
673014	23/32" X 48" X 96"	GP DRYPLY SYP STURD-I-FLOOR T&G

Georgia Pacific SYP Premium Underlayment

ITEM #	SIZE
264285	11/32" X 48" X 96"
254848	15/32" X 48" X 96"
247462	19/32" X 48" X 96"
247464	19/32" X 48" X 96"
247465	23/32" X 48" X 96"
247466	23/32" X 48" X 96"

DESCRIPTION PINE UNDERLAYMENT BLUEDGE PINE UNDERLAYMENT BLUEDGE PINE PREMIUM CROSSBAND SE BLUEDGE PINE PREMIUM CROSSBAND T&G BLUEDGE PINE PREMIUM CROSSBAND SE BLUEDGE



178 CA

Dricon Fire-Treated Plywood

Safety first

Dricon Fire-Treated Wood is the only fire retardant chemical for wood treating registered for use as a wood preservative with the U.S. Environmental Protection Agency. It is designed for interior use only and to be used in above-ground, protected applications and out of contact with water. Dricon treated wood offers superior interior fire protection with excellent resistance to fungal decay and termites when used in above-ground, weather-protected applications. Using Dricon wood helps to control smoke development and flame spread. Dricon plywood is often used in buildings where codes require more protection for its occupants such as at schools, churches, hospitals, apartment buildings, condos, hotels, office buildings, and shopping centers.

Dricon Fire-Treated Plywood

ITEM #	SIZE
712369	15/32" X 48" X 96"
712371	19/32" X 48" X 96"
712372	23/32" X 48" X 96"
713911	23/32" X 48" X 96"

DESCRIPTION

RTD SHTG EXP1 SOU 32/16 4PLY DRICON FRT WOOD RTD SHTG EXP1 SOU 40/20 DRICON FRT WOOD RTD SHTG EXP1 SOU 48/24 DRICON FRT WOOD RTD SHTG WEST 48/24 DRICON FRT WOOD 5PL



179

Dricon Ratings

For rated Sturd-I-Floor and Rated Sheathing Applicable at Temperatures Up to 170°F

Dricon FRT Plywood Span Ratings			
APA Rating	Panel Thickness	Dricon Rating	
32/16	15/32, 1/2	24/16	
40/20	5/8, 19/32	32/20	
48/24	23/32, 3/4	40/24	

Dricon FRT Wood Features:

- Class A fire retardant treated wood
- Contains no halogens, sulfates, or ammonium phosphates
- Can be used in contact with concrete that contacts the ground
- No more corrosive to fasteners and connectors than untreated wood
- Complies with the model codes and meets Factory Mutual's requirements for a Class 1 treated wood roof deck
- Earned the Good Housekeeping Seal and its 2-year promise
- Treating solution listed in current standards of the American Wood-Preservers' Association as FR-1 for fire retardant (Standard P17) and as SBX for preservative (Standard P5)



Specialty Plywood

Top choices on the market

APA trademarked High and Medium Density Overlay plywood (HDO and MDO) combine the toughness of exterior-type plywood with the superior wear of an overlaid surface. These features place HDO and MDO among the most durable construction materials on the market today. Both MDO and HDO plywood are manufactured with a thermosetting resin-impregnated fiber surface bonded under heat and pressure and both are available in "good one side" (mill stamped on back) or "good two side" (mill stamped on edge). Common applications for high and medium density overlay plywood include construction – including siding, soffit, fascias, chimney enclosures, and garage doors – industrial uses, concrete forming, agriculture, and marine uses.

Medium Density Overlay

ITEM #	SIZE
141832	3/8" X 48" X 96"
183583	1/2" X 48" X 96"
185303	3/4" X 48" X 96"
596223	1/2" X 48" X 96"
480713	3/4" X 48" X 96"
114009	3/8" X 48" X 96"
156592	1/2" X 48" X 96"
162984	3/4" X 48" X 96"
235880	1/2" X 48" X 96"
742361	1/2" X 48" X 96"

DESCRIPTION

MDO - GOOD ONE SIDE	
MDO - GOOD ONE SIDE	
MDO - GOOD ONE SIDE	
MDO - GOOD ONE SIDE/PRIMED	
MDO - GOOD ONE SIDE/PRIMED	
MDO - GOOD TWO SIDES	
MDO - GOOD TWO SIDES	1
MDO - GOOD TWO SIDES	
MDO - GOOD TWO SIDES/PRIMED	
MDO INDUSTRIAL EXT G1S	

High Density Overlay

Available by Special Order

Marine Grade Plywood

Structural perfection

Marine grade plywood is assembled gap and void-free in all layers and laminated with special, water-proof glue that holds the various layers together. When immersed, water has absolutely no effect on the glue or the strength of the lamination of marine grade plywood. Marine grade plywood will not commonly delaminate, bubble, buckle, or warp. Upon cutting marine grade plywood, no voids will be discovered on the cut edges. It is also usually constructed of harder woods such as Douglas Fir or Western Larch. Marine grade is a superior grade of plywood that usually outlasts pressure-treated plywood because the typical glues used in plywood, pressure-treated or not, will eventually fail for structural reasons.

Marine Grade


180

 ITEM #
 SIZE

 167765
 1/2" X 48" X 96"

 113256
 3/4" X 48" X 96"

DESCRIPTION AB EXT MARINE WEST AB EXT MARINE WEST

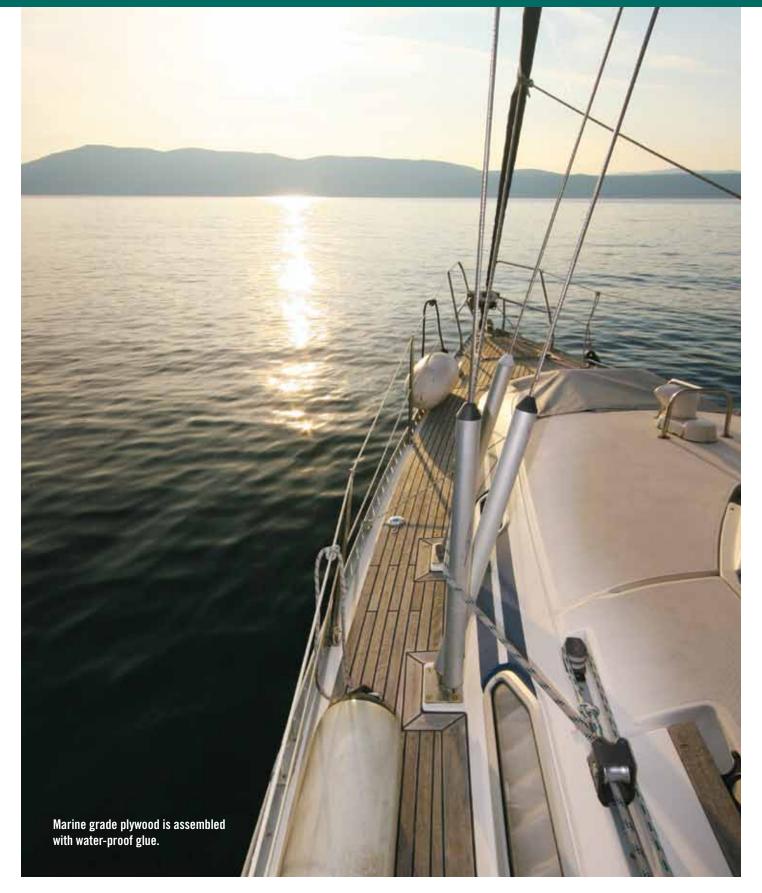



Info Corner: Plywood's Report Card

- A Best quality, no blemishes, well sanded surface without knots, veneer can be painted
- B Good quality, some blemishes, well sanded surface with potential for small knots up to 1" across
- C Average quality, depending on project, knots up to 1-1/2" across, discolorations and sanding defects may exist

C "Plugged" = An improved "C" panel with knotholes limited to 1/4" x 1/2" and splits limited to 1/8" wide, some broken grain allowed

D Maximum number of blemishes allowed, defects not repaired, knots and knotholes up to 2-1/2" across, not sanded; limit to interior use



C Great finish on face, relatively unfinished back



D Great for structural use, not suitable as finish material



Plywood Grades

Interior Grade Product Specifications				
			Inner	
Grade	Face	Back	Piles	Common Uses
A-A	А	А	D	Cabinet doors, built-ins, and
				furniture where both sides show.
A-B	А	В	D	Alternate for A-A. Face is finish
				grade; back is solid and smooth.
A-D	А	D	D	Finish grade face for paneling,
				built-ins, and backing.
B-D	В	D	D	Utility grade. One paintable
				side. Used for backing, cabinet
				sides, etc.
C-D	С	D	D	Sheathing and structural uses
				such as temporary enclosures,
				subfloor. Unsanded.
Under-	С	D	C, D	For underlayment or combination
layment	plugg			subfloor-underlayment under tile
	-ed			and carpeting.

Exterior Grade Product Specifications				
	Face	Back	Inner	
Grade			Piles	Common Uses
A-A	А	А	С	Outdoors, where appearance of
				both sides is important.
A-B	А	В	С	Alternate for A-A, where
				appearance of one side is less
				important. Face is finish grade.
A-C	А	С	С	Soffits, fences, base for coatings.
B-C	В	С	С	For utility uses such as farm
				buildings, some kinds of fences,
				base for coatings.
C-C	С	С	С	Excellent base for tile, backing
plugged	plugg			for wallcoverings, high-
	-ed			performance coatings.
C-C	С	С	С	Unsanded, for backing and
				rough construction exposed to
				weather.

VISIT BlueLinx •• AT WWW.BLUELINXCO.COM FOR ADDITIONAL PRODUCT LITERATURE

Lumber

High quality and low cost

As one of the largest lumber distributors in North America, BlueLinx harnesses the power of global supply chain sourcing to provide you with high-quality, low-cost construction lumber. We stock and distribute a full line of dimensional and stud lumber in a species mix customized to each market, including European spruce. Our product assortment includes 2 X 4 through 2 X 12, along with posts and timbers 8' through 36'. Green Douglas Fir is the premier soft lumber that can be easily carved and shaped. Southern Yellow Pine is durable softwood that is excellent for pressure treating, light frame construction, bracing, and floor and roof trusses.

SYP SIZE

DESCRIPTION

2" X 8"	#1 SYP KD 8'-20'	(96 PCS/UN)
2" X 10"	#1 SYP KD 8'-20'	(80 PCS/UN)
2" X 12"	#1 SYP KD 8'-20'	(64 PCS/UN)

Premium SPF

SIZE	DESCRIPTION
2" X 4"	#2 & BTR PREMIUM SPF 8'-20' (294 PCS/UN)
2" X 6"	#2 & BTR PREMIUM SPF 8'-20' (189 PCS/UN)

SPF SIZE

2" Y A"

DESCRIPTION #2 & BTR SPF 8'-20' (294 PCS/UN)

2 7 4	#2 & DIN 3FT 0-20 (294 F03/0N)
2" X 6"	#2 & BTR SPF 8'-20' (189 PCS/UN)
2" X 8"	#2 & BTR SPF 8'-20' (147 PCS/UN)
2" X 10"	#2 & BTR SPF 8'-20' (105 PCS/UN)

Studs

SIZE

DESCRIPTION

2" X 4"-07'	84" PET SPF/ESLP STUD S-DRY S4S
2" X 4"-08'	92-5/8" PET SPF PREM STUD S-DRY S4S (SINCLAIR)
2" X 4"-08'	96" PET SPF ECONOMY S-DRY S4S
2" X 4"-08'	96" PET SPF PREM STUD S-DRY S4S (SINCLAIR)
2" X 4"-09'	104-5/8" PET SPF/ESLP STUD S-DRY S4S
2" X 4"-10'	116-5/8" PET SPF/ESLP STUD S-DRY S4S
2" X 6"-08'	92-5/8" PET SPF/ESLP STUD S-DRY S4S
2" X 6"-09'	104-5/8" PET SPF /ESLP STUD S-DRY S4S
2" X 4"-10'	120" PET SPF/ESLP STUD S-DRY S4S
2" X 6"-10'	116-5/8" PET SPF/ESLP STUD S-DRY S4S



Green Doug Fir

SIZE DESCRIPTION

 2" X 6"
 #2 & BTR GREEN DOUG FIR 22'-24' (128 PCS/UN)

 2" X 8"
 #2 & BTR GREEN DOUG FIR 22',24',26',28' (96 PCS/UN)

 2" X 10"
 #2 & BTR GREEN DOUG FIR 22',24',26',28',30',32' (80 PCS/UN)

 2" X 12"
 #2 & BTR GREEN DOUG FIR 22',24',26',28',30',32' (64 PCS/UN)

Hem Fir

ITEM #	SIZE	DESCRIPTION
184871	2" X 10"-8'	#2 & BTR HEM FIR
163026	2" X 10"-10'	#2 & BTR HEM FIR
168745	2" X 10"-12'	#2 & BTR HEM FIR
139284	2" X 10"-14'	#2 & BTR HEM FIR
105727	2" X 10"-16'	#2 & BTR HEM FIR
197878	2" X 10"-18'	#2 & BTR HEM FIR
184989	2" X 10"-20'	#2 & BTR HEM FIR
156343	2" X 12"-8'	#2 & BTR HEM FIR
131069	2" X 12"-10'	#2 & BTR HEM FIR
168194	2" X 12"-12'	#2 & BTR HEM FIR
160847	2" X 12"-14'	#2 & BTR HEM FIR
139756	2" X 12"-16'	#2 & BTR HEM FIR
181086	2" X 12"-18'	#2 & BTR HEM FIR
120957	2" X 12"-20'	#2 & BTR HEM FIR

White Fir

ITEM #	SIZE	DESCRIPTION
660693	2" X 10"-8'	#2 & BTR WHITE FIR
671560	2" X 10"-10'	#2 & BTR WHITE FIR
660691	2" X 10"-12'	#2 & BTR WHITE FIR
660692	2" X 10"-14'	#2 & BTR WHITE FIR
660672	2" X 10"-16'	#2 & BTR WHITE FIR
660674	2" X 10"-18'	#2 & BTR WHITE FIR
660675	2" X 10"-20'	#2 & BTR WHITE FIR
660695	2" X 12"-8'	#2 & BTR WHITE FIR
660690	2" X 12"-10'	#2 & BTR WHITE FIR
660673	2" X 12"-12'	#2 & BTR WHITE FIR
671559	2" X 12"-14'	#2 & BTR WHITE FIR
671561	2" X 12"-16'	#2 & BTR WHITE FIR
671562	2" X 12"-18'	#2 & BTR WHITE FIR
671563	2" X 12"-20'	#2 & BTR WHITE FIR

SPF MSR

SIZE	DESCRIPTION
2" X 4"	1650 8'-20' (294 PCS/UN)
2" X 4"	2100 8'-20' (294 PCS/UN)
2" X 6"	1650 8'-20' (189 PCS/UN)
2" X 6"	2100 8'-20' (189 PCS/UN)



Lumber Comparison

186

Lumber Product Specifications			
	Thickness	Width	
Board Lumber	1"	2" or more	
Light Framing	2" to 4"	2" to 4"	
Studs	2" to 4"	2" to 6", 10' and shorter	
Structural Light Framing	2" to 4" 2" to 4"		
Structural Joints and Planks	2" to 4" 5" and wider		
Beams and Stingers	5" and thicker more than 2" greater than thickness		
Posts and Timbers	5" x 5" and larger	not more than 2" greater than thickness	
Decking	2" to 4"	4" to 12"wide	
Siding	Thickness expressed by dimension of butt edge		
Mouldings	Size at thickest and widest points		

Product \$	Product Specifications							
Board	PCS/Unit	8'	10'	12'	14'	16'	18'	20'
2 x 4	294	1568	1960	2352	2744	3136	3528	3920
2 x 4	208	1109	1388	1664	1941	2220	2496	2773
2 x 4	192	1024	1280	1536	1792	2048	2304	2560
2 x 6	189	1512	1890	2268	2646	3024	3402	3780
2 x 6	128	1024	1280	1536	1792	2048	2304	2560
2 x 8	96	1024	1280	1536	1792	2048	2304	2560
2 x 10	80	1067	1334	1600	1866	2134	2400	2667
2 x 12	64	1024	1280	1536	1792	2048	2304	2560

- free

OSB



High-rise style

Ideal for multi-story building designs, OSB (oriented strand board) is manufactured from waterproof heat-cured adhesives and rectangular wood strands that are arranged in cross-oriented layers, similar to plywood. This effect results in a structural engineered wood panel that shares many of the strength and performance characteristics of plywood. Produced in huge, continuous mats, OSB is a solid panel product of consistent quality with no laps, gaps, or voids. The manufacturing process makes it possible for panel makers to add innovative features such as a slip-resistant texture to panels designed for roof sheathing, and to supply oversized and metric panels.

OSB & Sheathing

Louisiana Pacific - OSB

ITEM #	SIZE	DESCRIPTION
283078	7/16" X 48" X 96"	LP OSB RATED SHEATHING
283079	15/32" X 48" X 96"	LP OSB RATED SHEATHING
278925	1/2" X 48" X 96"	LP OSB RATED SHEATHING
307222	19/32" X 48" X 96"	LP OSB RATED SHEATHING
272871	23/32" X 48" X 96"	LP OSB RATED STURD-I-FLOOR T&G
684170	23/32" X 48" X 96"	LP ORANGE PLUS OSB RATED STURD-I-FLOOR T&G
651544	23/32" X 48" X 96"	LP HIGH PERF OSB RATED STURD-I-FLOOR T&G

OSB

ITEM #	SIZE	DESCRIPTION
128580	1/4" X 48" X 96"	WAFERBOARD
113445	7/16" X 48" X 96"	WEYERHAUSER® OSB RATED SHEATHING
230287	7/16" X 48" X 108"	OSB RATED SHEATHING
253754	7/16" X 48" X 120"	OSB RATED SHEATHING
223821	15/32" X 48" X 96"	OSB RATED SHEATHING
172925	1/2" X 48" X 96"	WEYERHAUSER OSB RATED SHEATING
113490	19/32" X 48" X 96"	WEYERHAUSER OSB RATED SHEATHING
203831	23/32" X 48" X 96"	WEYERHAUSER OSB RATED STURD-I-FLOOR SE
193516	23/32" X 48" X 96"	WEYERHAUSER OSB RATED STURD-I-FLOOR T&G

Fir Sheathing & Underlayment

ITEM #	SIZE	DESCRIPTION
185109	11/32" X 48" X 96"	FIR RATED SHEATHING
154783	15/32" X 48" X 96"	4-PLY FIR RATED SHEATHING
202057	15/32" X 48" X 96"	5-PLY FIR RATED SHEATHING
178010	19/32" X 48" X 96"	FIR RATED SHEATHING
158747	19/32" X 48" X 96"	5-PLY FIR RATED SHEATHING
117389	23/32" X 48" X 96"	FIR RATED SHEATHING
241715	23/32" X 48" X 96"	FIR STURDI-FLOOR RATED SHEATHING T&G



187

VISIT BlueLinx

Relative Stiffness of Rated Sturd-I-Floor® Products

Baseline stiffness of 23/32" OSB Sturd-I-Floor 16" o.c. on 1.5" wide framing = 1.00

Table A			
Width of	Panel Type and Thickness Framing Member Spacin Center-to-Center (inches		
Framing Member		16"	19.2"
1.5"	23/32" OSB Sturd-I-Floor	1.00	0.55
	23/32" Plywood Sturd-I-Floor	1.10	0.60
1.75"	23/32" OSB Sturd-I-Floor	1.06	0.57
	23/32" Plywood Sturd-I-Floor	1.16	0.63
2.5"	23/32" OSB Sturd-I-Floor	1.25	0.66
	23/32" Plywood Sturd-I-Floor	1.38	0.72
3.5"	23/32" OSB Sturd-I-Floor	1.59	0.80
	23/32" Plywood Sturd-I-Floor	1.75	0.88



Baseline stiffness of 23/32" OSB Sturd-I-Floor **19.2**" o.c. on 1/5" wide framing = 1.00

Table B			
Width of	Panel Type and Thickness	Framing Men Center-to-Cer	
Framing Member		19.2"	24"
1.5"	23/32" OSB Sturd-I-Floor	1.00	0.55
	23/32" Plywood Sturd-I-Floor	1.10	0.60
1.75"	23/32" OSB Sturd-I-Floor	1.04	0.57
	23/32" Plywood Sturd-I-Floor	1.15	0.63
2.5"	23/32" OSB Sturd-I-Floor	1.20	0.66
	23/32" Plywood Sturd-I-Floor	1.32	0.72
3.5"	23/32" OSB Sturd-I-Floor	1.46	0.80
the second s	23/32" Plywood Sturd-I-Floor	1.61	0.88



LET BLUELINX BE YOUR WAREHOUSE

OUTDOOF

UILDIN



Your truck is on the way.

Bluelinx

Avoid the inventory squeeze.


You don't want to run out of stock. But order too much, and you end up paying a fortune to store, handle and insure excess inventory.

Rely on just-in-time inventory from BlueLinx to save you money.



Sales: 888-502-BLUE • www.BlueLinxCo.com

LET BLUELINX BE YOUR WAREHOUSE

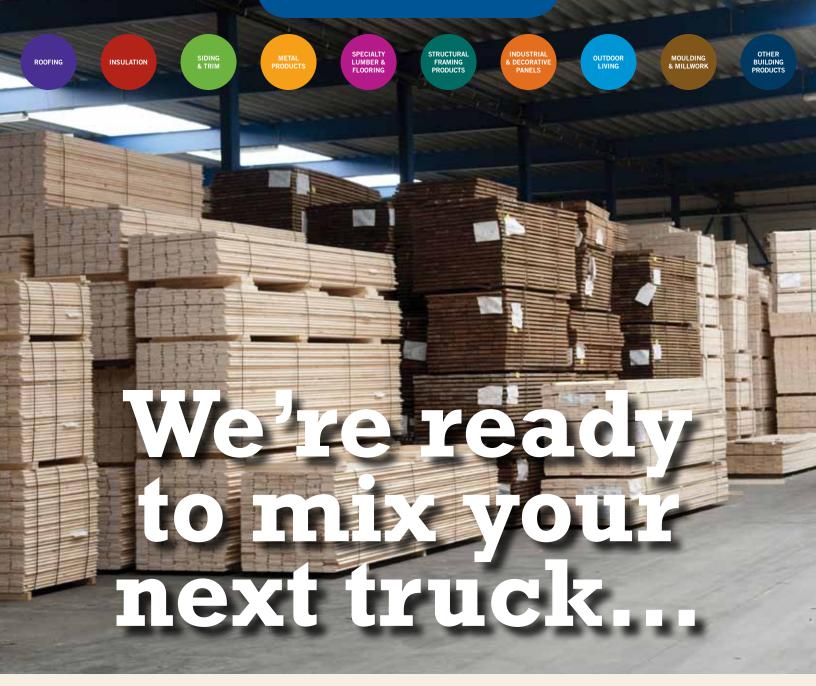

Over 70,000 different ways.

Call BlueLinx and gain access to the industry's leading selection of building products – more than 70,000 SKUs!

Lower your storage and transportation costs by ordering quantities that fit your needs. Receive express turnaround time on all orders. Get the customer service our seasoned professionals are known for.



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. @2010 BlueLinx Corporation. All rights reserved.

Industrial & Decorative Panels

Domestic Hardwood Plywood
Imported Hardwood Plywood
Hardwood Plywood Underlayment
Particleboard
Stair Treads
Melamine
MDF
Hardboard
Lionite
Paneling

Hardwood Plywood

Strength and high quality

A leader in distributing hardwood plywood, BlueLinx offers products with excellent surface and core characteristics. Since hardwood plywood grading is defined by appearance with a wide variation of grain, color, and natural characteristics of different species, the American National Standards Institute has established criteria intended to provide manufacturers, distributors, architects, and contractors with general guidelines. Lauan and Meranti are the most popular imports our customers request. Domestic hardwood plywood is most commonly cut from cherry, maple, oak, and poplar.

Veneer Matching

Veneer matching refers to the alignment of veneer strips on a panel. Hardwood plywood panels are precision-matched and available in a variety of veneer types.



Book-Match – Accomplished by turning over every other piece of progressive veneer peeled from the same log. The finished face resembles the opened pages of a book, with opposite patterns identical.



Slip-Match – Progressive pieces of veneer are joined side by side, same sides up. The result is a grain pattern more uniform than book-match.

Whole-Piece – Uses a single piece of veneer to expose a continuous grain characteristic across the entire panel.



color at the veneer joint but not necessarily matched for grain characteristics.

Pleasing Match - The face veneer is matched for

Mismatch or Random Match - Veneers are joined with the intention of creating a casual unmatched effect. Veneers from several logs may be used in the manufacture of these panels. This is commonly used in the production of prefinished wall panels.

Unmatched – The veneer is assembled without regard for color, pattern, or grain uniformity. Usually used for panel backs.

Types of Veneer Cuts

The manner in which veneers are cut is an important factor in producing the various visual effects obtained. Two logs of the same species, with their veneers cut differently, will have entirely different visual characters even though their colors are similar.




Rotary - The log is mounted centrally in the lathe and turned against a razor sharp blade, like unwinding a roll of paper. Since the cut follows the log's annual growth rings, a bold variegated

grain marking is produced. Eighty to ninety percent of all veneer is cut by the rotary lathe method.



192

Plain or Flat Slicing - The half log, or flitch, is mounted with the heart side flat against the guide plate of the slicer and the slicing is done parallel to a line through the center of the log. This produces a variegated figure that's similar to sawn lumber.



Half Round Slicing - A method of cutting in which log segments are mounted off-center in the lathe. This results in a cut slightly across the annual growth rings, and visually shows modified

characteristics of both rotary and plain sliced veneers. This method of cutting is often used on red and white oak.



Rift-Cut - Rift-cut veneer is produced in the various species of oak. Oak has medullary ray cells that radiate from the center of the log like curved spokes in a wheel. The rift or comb grain

effect is obtained by cutting perpendicularly to these medullary rays either on the lathe or slicer.

Okoume

ITEM #SIZE66954412MM X 48" X 96"66451818MM X 48" X 96"

Lauan/Meranti

 ITEM #
 SIZE

 214723
 2.7MM X 48" X 96"

 209229
 5.2MM X 48" X 96"

 111535
 5.2MM X 48" X 96"

 200002
 12 MM X 48" X 96"

 200003
 18 MM X 48" X 96"

DESCRIPTION

DESCRIPTION

BB/CC

BB/CC

LAUAN MERANTI POVL BB/CC EXTERIOR MERANTI CHINESE EXTERIOR MERANTI LAUAN MERANTI LAUAN MERANTI

Domestic Hardwood Plywood

Alder

ITEM #	SIZE	DE
288538	1/2" X 48" X 96"	CA
288858	3/4" X 48" X 96"	CA

Cherry

ITEM #	SIZE
437652	1/4" X 48" X 96"
288974	1/4" X 48" X 96"
742363	1/4" X 48" X 96"
100917	1/4" X 48" X 96"
102608	1/2" X 48" X 96"
288163	1/2" X 48" X 96"
101836	1/2" X 48.5" X 96.5"
742357	1/2" X 48" X 96"
101210	1/2" X 48" X 96"
102522	3/4" X 48" X 96"
101802	3/4" X 48.5" X 96.5"
289077	3/4" X 48" X 96"
101868	3/4" X 48.5" X 96.5"
742375	3/4" X 48.5" X 96.5"
101230	3/4" X 48.5" X 96.5"

ESCRIPTION ARB A-1MDF PS ALDER

ARB A-2MDF PS ALDER

DESCRIPTION

CARB A-1 CHERRY PS V/C MPF HPVA CARB A-4 MDF PS CHERRY CARB 1-4 CHERRY PS PLK/MCH LAUAN V/C CARB SHOP CHERRY (742363 O/G) CARB A-1 CHERRY PS MPF V/C CARB A-1 MDF PS CHERRY CARB B-2 CHERRY PS MPF V/C CARB 1-4 CHERRY PS PLK/MCH V/C CARB SHOP CHERRY (742357 O/G) CARB A-1 CHERRY PS MPF V/C CARB A-1 CHERRY PS MPF J-PLAT V/C CARB A-1 CHERRY PS MPF J-PLAT V/C CARB A-1 MDF PS CHERRY CARB B-2 CHERRY PS MPF V/C CARB B-1 CHERRY PS MPF V/C CARB 1-1 CHERRY PS PLK/MCH PS BK LAUAN V/C CARB SHOP CHERRY (742375 O/G)

Hardwood Plywood Terms to Know

Core:

- **VC** Veneer Core
- LC Lumber Core
- MDF Medium Density Fiberboard Core
- **PB** Particleboard Core

Cut:

- **RC** Rotary Cut
- **PS** Plain Sliced
- **QTR** Quarter-Sliced
- **RT** Rift Cut

Domestic Grade:

- B2 Face/Back
- Face A, B, C, D, E
 (A being the highest quality)
- Back 1, 2, 3, 4
 (1 being the highest quality)

Import Grade:

- G1S Good 1 Side
- **SSB** Sound Sanded Back
- G2S Good 2 Sides

Description:

- **WPF** Whole Piece Face (1Pc)
- MPF Multi Piece Face
- Sap Sapwood (White)
- Heart Heartwood (Red)
- Natural Mixed Heartwood & Sapwood
- **UV** UV Topcoated

Domestic Hardwood Plywood

Hickorv

ITEM # SIZE 113408 1/4" X 48" X 96" 113409 1/2" X 48" X 96" 113565 3/4" X 48" X 96"

Khaya (Mahogany)

ITEM # SIZE 113974 1/2" X 48" X 96" 734126 3/4" X 48" X 96"

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

DESCRIPTION

CARB A-4 MDF PS HICKORY

CARB A-1 MDF PS HICKORY

CARB A-1 MDF PS HICKORY

CARB A-1 MDF PS LYPTUS

CARB A-1 MDF PS LYPTUS

CARB A-4 MDF PS MAPLE

CARB A-1 MDF PS MAPLE

CARB A-1 MDF PS MAPLE

CARB A-1 MDF PS MAPLE

CARB B-3 NAT ASH RC MPF V/C

CARB A-4 MDF PS MAPLE CROSS GRAIN

CARB A-1 MDF PS KHAYA (MAHOGANY) CARB A-1 MDF PS KHAYA (MAHOGANY)

Lyptus

ITEM # SIZE 113641 1/2" X 48" X 96" 113819 3/4" X 48" X 96"

Maple

ITEM # SIZE 470935 1/4" X 48" X 96" 288661 1/2" X 48" X 96" 470168 3/4" X 48" X 96" 113885 113916 3/8" X 48" X 96"

3/4" X 48" X 120"

Natural Ash

ITEM # SIZE 101909 3/4" X 48" X 96"

Natural Birch

ITEM # SIZE

DESCRIPTION

742365 1/4" X 48" X 96" 742027 1/2" X 48" X 96" 101458 1/2" X 48.5" X 96.5" 742372 3/4" X 48" X 96" 742029 3/4" X 48" X 96" 742374 3/4" X 48" X 96" 742031 3/4" X 48" X 96" 101493 3/4" X 48.5" X 96.5" 742033 3/4" X 48" X 96" 742370 3/4" X 48" X 96"

CARB B-4 NAT BIRCH RC WPF REJ/BK UV1S V/C CARB A-1 NAT BIRCH RC WPF V/C CARB B-2 NAT BIRCH RC MPF V/C CARB A-1 NAT BIRCH RC MPF V/C CARB A-1 NAT BIRCH RC WPF V/C CARB B-2 NAT BIRCH RC MPF V/C CARB B-2 NAT BIRCH RC WPF V/C CARB C-2 NAT BIRCH RC MPF V/C CARB D-3 NAT BIRCH RC WPF V/C CARB 2-2 NAT BIRCH RC WPF UV2S V/C







CALL BlueLinx

Hardwood Plywood Cores

Hardwood Plywood is available with veneer or solid cores. The core type affects panel thickness, weight, and cost.



.

VISIT BlueLinx

Veneer Core (VC)

The most common core type with all inner plies made from softwood or hardwood veneer. Employs a standard cross-ply

technique with three, five, seven, or nine plies (including the face and back) used to produce the final panel. Structural strength and stability make veneer core panels particularly well-suited to cabinet and casework.




Solid Core (SC)

Solid cores consist of particleboard, or medium density fiberboard (MDF). Exceptionally stable; used for applications where flatness is required.

Hybrid Core (PBC)

A hybrid core with the advantage of both veneer core a solid core.



Veneer core crossbands are laminated on both sides of glued-up strips of lumber.

195

Characteristics of Wood Veneered Panel Products

Table Developed in Co	operation wit	th the Archited	tural Woodwo	ork Institute			
Panel Type	Flatness	Visual Edge	Surface	urface Dimensional		Bending	Availability
		Quality	Uniformity	Stability		Strength	
Industrial Particleboard	Excellent	Good	Excellent	Fair	Fair	Good	Readily
Core (Medium Density)							
Medium Density	Excellent	Excellent	Excellent	Fair	Good	Good	Readily
Fiberboard Core (MDF)							
Veneer Core –	Fair	Good	Good	Excellent	Excellent	Excellent	Readily
All Hardwood							
Veneer Core –	Fair	Good	Fair	Excellent	Excellent	Excellent	Readily
All Softwood							
Lumber Core –	Good	Good	Good	Good	Excellent	Excellent	Limited
Hardwood or Softwood							
Standard	Excellent	Excellent	Excellent	Fair	Good	Good	Readily
Hardboard Core							
Tempered	Excellent	Good	Good	Good	Good	Good	Limited
Hardboard Core							
Moisture Resistant	Excellent	Good	Good	Fair	Fair	Good	Limited
Particleboard Core							
Moisture Resistant	Excellent	Excellent	Good	Fair	Good	Good	Limited
MDF Core							
Fire Resistant	Excellent	Fair	Good	Fair	Fair	Good	Limited
Particleboard Core							

NOTES: Various characteristics above are influenced by the grade and thickness of the core and specific gravity of the core species. Visual Edge Quality is rated before treatment with edge bands or fillers, and Visual Edge Quality for lumber core assumes the use of "clear edge" grade. Surface Uniformity has a direct relationship to the performance of the fine veneers placed over the surface. Dimensional Stability is usually related to exposure to wide swings in relative humidity. Screwholding and Bending Strength are influenced by proper design and engineering.

Natural Maple

ITEM #	SIZE
102557	1/4" X 48" X 96"
101531	1/2" X 48.5" X 96.5"
101776	3/4" X 48.5" X 96.5"
102476	3/4" X 48" X 96"
101733	3/4" X 48.5" X 96.5"

Poplar

ITEM #	SIZE
102714	1/4" X 48" X 96"
102762	1/2" X 48" X 96"
12345	1/2" X 48" X 96"
102485	3/4" X 48" X 96"

Red Oak

SIZE
1/4" X 48" X 96"
1/4" X 48" X 96"
1/4" X 48" X 96"
1/2" X 48.5" X 96.5"
1/2" X 48.5" X 96.5"
3/4" X 48" X 96"
3/4" X 48" X 120"
3/4" X 96" X 48"
3/4" X 48.5" X 96.5"
3/4" X 48.5" X 96.5"
3/4" X 48" X 96"
3/4" X 48" X 96"
3/4" X 48.5" X 96.5"
3/4" X 48.5" X 96.5"
3/4" X 48.5" X 96.5"
5.2MM X 48" X 96"
5.2MM X 48" X 96"

DESCRIPTION

CARB B-2 NAT MAPLE RC MPF V/C CARB B-2 NAT MAPLE RC MPF V/C CARB A-1 NAT MAPLE RC MPF V/C CARB B-2 NAT MAPLE RC MPF V/C CARB B-2 NAT MAPLE RC MPF V/C

DESCRIPTION

CARB B-4 POPLAR RC MPF V/C CARB A-1 POPLAR RC MPF V/C CARB B-1 POPLAR RC MPF V/C CARB B-1 POPLAR RC MPF V/C

DESCRIPTION

A-4 MDF PS RED OAK A-4 RED OAK RC WPF V/C CARB B-4 RED OAK RC MPF V/C A-1 MDF PS RED OAK A-1 RED OAK RC MPF V/C B-2 RED OAK RC MPF V/C B-4 RED OAK RC MPF POPLAR V/C SHOP RED OAK (742360 O/G) A-1 MDF PS RED OAK CARB A-1 RED OAK RC WPF V/C CARB A-1 RED OAK RC MPF MDF V/C CARB A-1 RED OAK RC MPF V/C A-1 MDF PS RED OAK A-4 MDF PS RED OAK CROSS GRAIN B-1 RED OAK PS PLK/MCH V/C B-1 RED OAK PLK/MCH PS MDF V/C B-2 RED OAK RC MPF V/C B-2 RED OAK RC WPF V/C B-2 RED OAK RC MPF J-PLAT V/C SHOP RED OAK (742378 O/G) SHOP RED OAK (742376 O/G) B-2 RED OAK BV GRV UNF MDF/C SHOP RED OAK (742379 O/G)



Understanding Grades

Characteristics vary according to species, but there is a basic grading structure, which is followed for all species described in the Voluntary Standard. The most uniform color and grain is at the top of the scale for face grades.

IIII.+CINF

Face Grade	Applications
Grade	Description
AA	The best quality face grade for high-end use such as architectural paneling, doors and cabinets, case goods, and quality furniture.
A	Where AA is not required but excellent appearance is very important as in cabinets and furniture.
В	Where the natural characteristics and appearance of the species are desirable.
C, D, and E	Provide sound surfaces but allow unlimited color variation; grades C, D & E, respectively, allow repairs in increasing size ranges. Applications – where surface will be hidden or a more natural appearance is desired.
Specialty	Appearance characteristics are not standardized and are subject to agreement between the individual buyer and seller, as in factory-finished wall paneling. Usually effects such as those created by wormy chestnut, bird's eye maple, and English brown oak are considered specialty grade.

Back Grade Descriptions									
Grade	Description								
1, 2, 3, and 4	Back grades are designated by numbers: 1, 2, 3, and 4. Requirements of grade 1 are most restrictive. Grades 1								
	and 2 provide sound surfaces with all openings in the veneer repaired except for vertical worm holes not larger than								
	1.6 mm (1/16"). Grades 3 and 4 permit some open defects; however, grade 3 can be obtained with repaired splits,								
	joints, bark pockets, laps, and knotholes to achieve permits knotholes up to 102 mm (4") in diameter, and open								
	splits and joints limited by width and length.								

Grade	Description
J, K, L, and M	Four inner ply grades are described with the following letter designations: J, K, L, and M. Grade J is the most restrictive, allowing minimal size openings. Grades K, L, and M are progressively less restrictive. The least restrictive grade (M) is usually reserved for plies not adjacent to faces, and allows found and similar shaped openings not to exceed 63.5 mm (2 ¹ / ₂ ") and elongated openings up to 25.4 mm (1") as visible on the edges or ends of panels.

*Descriptions of allowable characteristics for grades AA, A, and B are identical to those used by the Architectural Woodwork Institute in their Quality Standards. **Specialty grades include veneer possessing characteristics unlike any of those described in the first six grades. Characteristics will be agreed upon between buyer and seller. NOTE: There are no longer words such as "premium," "select," "superior," etc., to refer to grades. Such adjectives are not included in the Standard.



Sap Maple

ITEM #	SIZE
742362	1/2" X 48.5" X 96.5"
742366	1/4" X 48.5" X 96.5"
742368	1/4" X 48.5" X 96.5"
742377	3/4" X 48.5" X 96.5"
101279	1/4" X 48.5" X 96.5"
101289	1/4" X 48.5" X 96.5"
101292	1/2" X 48.5" X 96.5"
101301	3/4" X 48.5" X 96.5"

DESCRIPTION

CARB B-4 SAP MAPLE (85%) RC WPF PLT/C B-1 SAP MAPLE RC WPF SAP/BK LAU V/C B-4 SAP MAPLE (85%) RC WPF PLT/C B-1 SAP MAPLE RC WPF SAP/BK LAU V/C SHOP SAPMAPLE (742368 O/G) SHOP SAPMAPLE (742366 O/G) SHOP SAPMAPLE (742362 O/G) SHOP SAPMAPLE (742377 O/G)



Walnut

DESCRIPTION

 ITEM #
 SIZE

 101309
 1/4" X 48" X 96"

 742367
 1/4" X 48" X 96"


CARB SHOP WALNUT(742367 O/G) CARB B-3 WALNUT PS MPF BV GRV MDF/C

White Oak

ITEM #	SIZE	DESCRIPTION
110364	3/4" X 48.5" X 96.5"	CARB SHOP B-1 WHITE OAK (738177 O/G)
102467	3/4" X 48.5" X 96.5"	CARB B-1 WHT OAK QTRSWN SLIP/MCH MDF V/C

Common Thicknesses & Metric Equivalents Metric Nominal Equivalent 3 mm 1/8" 5.2 mm 1/4" 3/8" 9 mm 1/2" 12 mm 15 mm 5/8" 18 mm 3/4"

Sample Edge Stamp

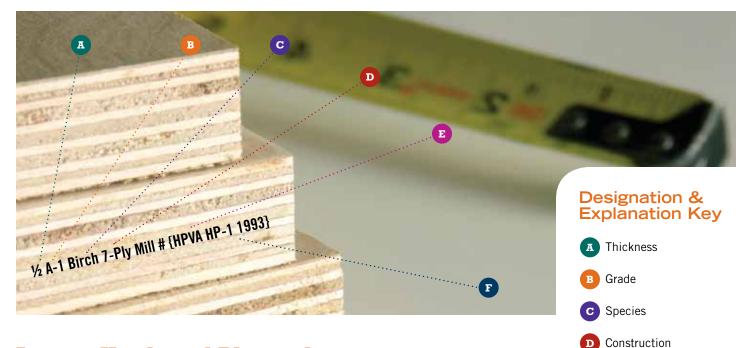

Import Hardwood Plywood

ITEM # SIZE 425400 5.2MM X 48" X 96" 159899 5.2MM X 48" X 96" 673976 12.0MM X 48" X 96" 674443 12.0MM X 48" X 96" 670072 18MM X 48" X 96" 674444 18MM X 48" X 96" 669521 18MM X 48" X 96"

DESCRIPTION

FANCY INTERIOR RED OAK PS V/C G1S INTERIOR IMP NATURAL BIRCH PS **B-2 IMPORT BIRCH WPF** B-2 IMPORT RED OAK WPF **B-2 IMPORT BIRCH WPF** B-2 IMPORT RED OAK WPF C-2 IMPORT BIRCH WPF

UV Top Coated (Pre-finished) White Birch

DESCRIPTION

ITEM # SIZE 107886 5.2 MM X 48.5" x 96.5" 107894 12 MM X 48.5" x 96.5" 107902 18 MM X 48.5" x 96.5" 107914 18 MM X 48.5" x 96.5"

CARB WHITE BIRCH TOP COATED 1 SIDE CARB WHITE BIRCH TOP COATED 2 SIDE CARB WHITE BIRCH TOP COATED 1 SIDE CARB WHITE BIRCH TOP COATED 2 SIDE

ULTRAPLY XL (5.2MM) UL 5-PLY VC EXTERIOR

ULTRAPLY XL (5.2MM) UL 5-PLY VC EXTERIOR

UltraPly Premium Underlayment

DESCRIPTION


ITEM # SIZE 734816 1/4" X 48" X 48" 734706 1/4" X 48" X 96"

Bending Lauan

ITEM #	SIZE
336195	3/8" X 8" X 4"
336194	3/8" X 4" X 8"
466811	1/4" X 8" X 4"

VISIT BlueLinx

DESCRIPTION **BENDING LAUAN (4') BARREL**





199

HPVA Mill Number/

Published Standard

Governing Manufacture

Mill Identification

E

Particleboard

Economical and dependable

The dominant species of particleboard is ponderosa pine, which provides a highly machinable substrate, light in color. Particleboard can be sawed, shaped, and routed without chipping or flaking. Because it has a high internal bond, smooth surfaces, and uniform density and strength, particleboard performs well for closet shelving or portable cabinetry. Note that particleboard may not be able to withstand stress as well as hardwood products, but its use in interior projects is economical and dependable.

Particleboard Shelving

ITEM #	SIZE	DESCRIPTION
198729	3/4" X 12" X 96"	PB SHELVING RAW BNEF
198728	3/4" X 12" X 144"	PB SHELVING RAW BNEF
244836	3/4" X 16" X 96"	PB SHELVING RAW BNEF
227366	3/4" X 16" X 144"	PB SHELVING RAW BNEF
474155	3/4" X 24" X 144"	PB SHELVING RAW BNEF
630657	3/4" X 12" X 96"	PB WHITE SHELVING BNEF
630658	3/4" X 12" X 144"	PB WHITE SHELVING BNEF
630659	3/4" X 16" X 96"	PB WHITE SHELVING BNEF
630660	3/4" X 16" X 144"	PB WHITE SHELVING BNEF
630661	3/4" X 24" X 96"	PB WHITE SHELVING BNEF
630662	3/4" X 24" X 144"	PB WHITE SHELVING BNEF
430889	3/4" X 12" X 96"	MDF SHELVING BULL NOSED
438149	3/4" X 12" X 145"	MDF SHELVING BULL NOSED
126510	3/4" X 16" X 145"	MDF SHELVING BULL NOSED
710585	3/4" X 16" X 96"	MDF SHELVING BULL NOSED
709585	3/4" X 24" X 96"	MDF SHELVING BULL NOSED



Produ	ict S	pecifica	ations														
	Dimensional Tolerances				Physical and Mechanical Properties									Linear Expansion			
				Thickness	Tolerand	e						Scre	w-holdin	g]		max. avg.
		ength Width		Average Specified		ice from Average	Modulus of Rupture		Modulus of Elasticity		Internal Bond		E	Face		Edge	
Grade	mm	inch	mm	inch	psi	psi	psi	psi	psi	psi	psi	psi	lbs.	lbs.	lbs.	lbs.	%
H-1	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	14.9	(2161)	2160	(313300)	0.81	(117)	1600	(360)	1200	(270)	NS
H-2	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	18.5	(2683)	2160	(313300)	0.81	(117)	1700	(382)	1400	(315)	NS
H-3	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	21.1	(3060)	2475	(359000)	0.90	(131)	1800	(405)	1400	(315)	NS
M-0	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	7.6	(1102)	1380	(200200)	0.31	(45)	NS		NS		NS
M-1	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	10.0	(1450)	1550	(224800)	0.36	(52)	NS		NS		0.40
M-S	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	11.0	(1595)	1700	(246600)	0.36	(52)	800	(180)	700	(157)	0.40
M-2	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	13.0	(1885)	2000	(290100)	0.40	(58)	900	(202)	800	(180)	0.40
M-3i	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	15.0	(2176)	2500	(362600)	0.50	(73)	1000	(225)	900	(202)	0.40
LD-1	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	2.8	(406)	500	(72500)	0.10	(15)	360	(81)	NS		0.40
LD-2	2.0	(0.080)	0.200	(0.008)	0.100	(0.004)	2.8	(406)	500	(72500)	0.14	(20)	520	(117)	NS		0.40





CARB Certified - P/B Sheetstock

ITEM #	SIZE	DESCRIPTION
179268	1/2" X 49" X 97"	INDUSTRIAL PARTICLEBOARD
177176	5/8" X 61" X 97"	INDUSTRIAL PARTICLEBOARD
70949	25/8" X 49" X 97"	INDUSTRIAL PARTICLEBOARD
196572	3/4" X 49" X 97"	INDUSTRIAL PARTICLEBOARD
707010	3/4" X 49" X 121"	INDUSTRIAL PARTICLEBOARD
707013	3/4" X 49" X 145"	INDUSTRIAL PARTICLEBOARD
707014	3/4" X 61" X 97"	INDUSTRIAL PARTICLEBOARD
702327	3/4" X 61" X 121"	INDUSTRIAL PARTICLEBOARD
707022	3/4" X 61" X 145"	INDUSTRIAL PARTICLEBOARD
686117	1" X 49" X 97"	INDUSTRIAL PARTICLEBOARD
686118	1" X 49" X 121"	INDUSTRIAL PARTICLEBOARD
707023	1" X 61" X 97"	INDUSTRIAL PARTICLEBOARD
181853	1" X 61" X 121"	INDUSTRIAL PARTICLEBOARD
686126	1-1/8" X 49" X 97"	INDUSTRIAL PARTICLEBOARD
132091	1-1/8" X 49" X 121"	INDUSTRIAL PARTICLEBOARD
475985	1-1/8" X 49" X 145"	INDUSTRIAL PARTICLEBOARD
707025	1-1/8" X 61" X 97"	INDUSTRIAL PARTICLEBOARD
139570	1-1/8" X 61" X 145"	INDUSTRIAL PARTICLEBOARD

CARB Certified - Countertop

ITEM #	SIZE	DESCRIPTION
707027	3/4" X 25" X 97"	WESTERN INDUSTRIAL PARTICLEBOARD
707132	3/4" X 25" X 121"	WESTERN INDUSTRIAL PARTICLEBOARD
707133	3/4" X 25" X 145"	WESTERN INDUSTRIAL PARTICLEBOARD
707134	3/4" X 30" X 97"	WESTERN INDUSTRIAL PARTICLEBOARD
707135	3/4" X 30" X 121"	WESTERN INDUSTRIAL PARTICLEBOARD
707136	3/4" X 30" X 145"	WESTERN INDUSTRIAL PARTICLEBOARD
707137	3/4" X 36" X 97"	WESTERN INDUSTRIAL PARTICLEBOARD
707139	3/4" X 36" X 121"	WESTERN INDUSTRIAL PARTICLEBOARD
707140	3/4" X 36" X 145"	WESTERN INDUSTRIAL PARTICLEBOARD
159572	3/4" X 36" X 145"	SOUTHERN INDUSTRIAL PARTICLEBOARD

* More items available in various thicknesses 3/8" - 1-1/2", lengths and widths * NAUF, FSC, Moisture Resistant items available



Stair Treads

No knots or grain

Particleboard has gained wide acceptance among builders as a stepping material. Particleboard stepping has no knots or grain, comes with one edge bullnosed, and has been sanded to provide a smooth surface and close tolerances. It can be ordered in specific lengths from some manufacturers or cut on site from standard lengths. Particleboard stair treads can be installed using conventional framing and fastening practices. Structural adhesives should be used in combination with nailing. When planning to arrange stair treads, consider location. Stairs near entries will be subject to wet foot traffic, so treads should be protected by a waterproof surface such as vinyl floor covering. When carpeting is used, the treads should be protected with a suitable moisture-resistant coating before installation of the carpet.

Particleboard Stair Treads

ITEM #	SIZE	DESCRIPTION
200083	1-1/8" X 11-1/2" X 42"	PB STAIR TREADS
200084	1-1/8" X 11-1/2" X 48"	PB STAIR TREADS
572421	1-1/8" X 11-1/2" X 145"	PB STAIR TREADS

Particleboard Tread Risers

 ITEM #
 SIZE

 604860
 3/4" X 7-1/4" X 48"

DESCRIPTION PB TREAD RISERS



What is CARB Certified?

CARB (California Air Resources Board) certification requirements state that manufacturers of hardwood plywood, particleboard, and MDF using resins that contain formaldehyde be in compliance with the emission standards specified and must be verified using a third-party approved certifier. Suppliers should be aware that CARB voted to implement new limits for formaldehyde emitted from composite wood products and implementation began on January 1, 2009. When the final limits are fully in place in 2012, the regulation will establish the toughest production standard in the world for formaldehyde emissions from composite wood products.

Visit www.arb.ca.gov/homepage.htm for more information.

Melamine

Flexible and versatile

Melamine is an organic compound that is often combined with formaldehyde to produce melamine resin, a synthetic polymer that is fire resistant and heat tolerant. Melamine resin is a very versatile material with a highly stable structure. Uses for melamine include whiteboards, floor tiles, kitchenware, fire retardant fabrics, and commercial filters. Melamine can be easily molded while warm, but will set into a fixed form. This property makes it ideally suited to certain industrial applications. Melamine resin is known as a thermoset plastic because the plastic is fixed after molding. If exposed to enough heat, melamine will decompose. The plastic is able to withstand higher temperatures than other plastics, however. Because it is a thermoset plastic, melamine resin is difficult to recycle.

Thermafused Melamine Shelving

ITEM #	SIZE	DESCRIPTION
643652	3/4" X 11-3/4" X 97"	PB SHELVING MELAMINE WHITE 2S EB1LE
643653	3/4" X 15-3/4" X 97"	PB SHELVING MELAMINE WHITE 2S EB1LE
643654	3/4" X 23-3/4" X 97"	PB SHELVING MELAMINE WHITE 2S EB1LE
118207	3/4" X 11-3/4" X 145"	PB SHELVING MELAMINE WHITE 2S EB1LE

CARB Certified – Thermafused Melamine Sheetstock

ITEM #	SIZE	DESCRIPTION
659030	1/4" X 49" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE®
636009	1/4" X 49" X 97"	BLACK 2 SIDES ROSEBURG DURAMINE
655082	1/2" X 49" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
658936	1/2" X 49" X 97"	BLACK 2 SIDES ROSEBURG DURAMINE
659883	1/2" X 61" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
655392	1/2" X 61" X 109"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
653282	3/4" X 49" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
664896	3/4" X 49" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
653332	3/4" X 49" X 97"	OXFORD WHITE 1S PG/BACKER ROSEBURG DURAMINE
653359	3/4" X 49" X 97"	ALMONDINE 2 SIDE ROSEBURG DURAMINE
654021	3/4" X 49" X 97"	BLACK 2 SIDES ROSEBURG DURAMINE
653283	3/4" X 61" X 97"	OXFORD WHITE 2 SIDES ROSEBURG DURAMINE
654022	3/4" X 61" X 97"	BLACK 2 SIDES ROSEBURG DURAMINE

MDF

Smooth texture

MDF (medium density fiberboard) is a type of hardwood, which is made from wood fibers glued under heat and pressure. There are several advantages of using MDF over plywood or chipboard. MDF is dense, flat and stiff, has no knots, and is easily machined. It can be painted with oil or water-based paints as well as varnishes to produce a smooth quality surface. Because MDF contains no grain, it can be cut, drilled, machined, and filed without damaging the surface. MDF can be dangerous to use if the correct safety precautions are not taken. MDF contains a substance called urea formaldehyde, which may be released from the material through cutting and sanding. Urea formaldehyde may cause irritation to the eyes and lungs. Proper ventilation is required when using it and facemasks are needed when sanding or cutting MDF with machinery.

CARB Certified – MDF Sheetstock

ITEM #	SIZE	DESCRIPTION
298638	3/16" X 48" X 96"	MEDIUM DENSITY FIBERBOARD
475361	3/16" X 49" X 121"	MEDIUM DENSITY FIBERBOARD
217851	1/4" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
242604	1/4" X 61" X 97"	MEDIUM DENSITY FIBERBOARD
324504	1/4" X 61" X 121"	MEDIUM DENSITY FIBERBOARD
129682	3/8" X 49" X 145"	MEDIUM DENSITY FIBERBOARD
115138	1/2" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
106110	1/2" X 49" X 109"	MEDIUM DENSITY FIBERBOARD
222637	1/2" X 49" X 121"	MEDIUM DENSITY FIBERBOARD
260979	1/2" X 49" X 145"	MEDIUM DENSITY FIBERBOARD
200102	1/2" X 61" X 97"	MEDIUM DENSITY FIBERBOARD
162224	1/2" X 61" X 109"	MEDIUM DENSITY FIBERBOARD
137917	1/2" X 61" X 121"	MEDIUM DENSITY FIBERBOARD
312761	1/2" X 61" X 145"	MEDIUM DENSITY FIBERBOARD
201990	5/8" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
118193	5/8" X 61" X 97"	MEDIUM DENSITY FIBERBOARD
225677	11/16" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
202467	3/4" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
225678	3/4" X 49" X 121"	MEDIUM DENSITY FIBERBOARD
319869	3/4" X 49" X 145"	MEDIUM DENSITY FIBERBOARD
200104	3/4" X 61" X 97"	MEDIUM DENSITY FIBERBOARD
166035	3/4" X 61" X 109"	MEDIUM DENSITY FIBERBOARD
170232	3/4" X 61" X 121"	MEDIUM DENSITY FIBERBOARD
139265	3/4" X 61" X 145"	MEDIUM DENSITY FIBERBOARD
124924	1" X 49" X 97"	MEDIUM DENSITY FIBERBOARD
149736	1" X 61" X 121"	MEDIUM DENSITY FIBERBOARD
More items	available in various thick	messes

More items available in various thicknesses, 1/4" - 1-1/2", lengths and widths



BlueLinx supplier CARB certification requirements state that manufacturers of hardwood plywood, particleboard, and MDF using resins that contain formaldehyde be in compliance with the emission standards specified and must be verified by using a third-party CARB approved certifier.

Medium Density Fiberboard Common Uses

- Doors, Jambs, & Millwork
- Laminating & Finishing
- Edge Shaping & Machining
- Moulding
- Embossing
- Office & Residential Furniture
- Kitchen Cabinets
- Paneling
- Laminate Flooring

.

Store Fixtures

Table 1: Physical and Mechanical Property Requirements

For MD	MDF when determined in accordance with ASTM D 1037-06a Part A											
					Physica	I and Mechan	ical Prop	erties				
											Maximum Thi	
								Swell (T	5)			
		lus of		dulus of	Inte	rnal Bond		Screw	holding		-	
	Rupture (MOR) Elasticity (MOE)		(IB)		Fa	Face Ed		dge				
Grades	N/mm ²	(psi)	N/mm ²	psi	mm	(inch)	mm	(inch)	mm	(inch)	mm	(inch)
115	12.4	1800	1241	180000	0.47	68	703	158	601	135	1.65 (0.065)	11%
130	21.6	3130	2160	313000	0.54	78	988	222	787	177	1.65 (0.065)	11%
155	27.9	4050	2792	405000	0.81	117	1201	270	1001	225	1.65 (0.065)	11%

Table 2: Pysical and Mechanical Property Requirements for MDF

In accordance	In accordance with ASTM D 1037-06a Part B Test Methods for Hardboard							
	Physical and Mechanical Properties							
	Modulus of Rupture (MOR)		Interna (IE		Maximum Thickness Swell (TS)			
Grades	N/mm ²	(psi)	N/mm ²	psi	mm	(inch)		
210	18.9	2741	0.32	46	2.2	(0.087)		
220	28.9	4192	0.54	78	2.2	(0.087)		
230	28.9	4192	0.90	131	2.2	(0.087)		

Property Requirements Common to all MDF			
Properties	Tolerance Limits		
Panel Length or Width 0.61m (2 feet)	+/- 2.0 mm (0.080 inch)		
Panel Average from Specified Thickness	+/- 0.125 mm (0.005 inch)		
Variance from Panel Average Thickness	+/- 0.125 mm (0.005 inch)		
Linear Expansion (LE)	0.33 percent		
Formaldehyde Emissions	See below		

Formaldehyde Emissions 0.21 ppm or 0.11 ppm for MDF with a minimum thickness greater than 8 mm. Formaldehyde Emissions 0.21 ppm or 0.13 ppm for MDF with a maximum thickness greater than 8 mm.





Hardboard

Scuff and humidity resistant

Hardboard is a composite panel manufactured primarily from inter-felted ligno-cellulosic fibers consolidated under heat and pressure. One of the benefits of using hardboard is that it resists marring, scuffing, and abrasion, as well as changes in temperature and humidity. Other materials may be added during the manufacturing process to improve certain properties, such as resistance to abrasion and moisture, and increased strength and durability. Hardboard has a uniform thickness, density, and appearance and has no grain. Hardboard can be cut, routed, shaped, and drilled with standard woodworking tools. The most common uses for hardboard are siding, perforated board, exterior trim, office and residential furniture, and door skins.

Hardboard Sheetstock

ITEM #	SIZE	DESCRIPTION
174859	1/8" X 48" X 96"	STANDARD HARDBOARD S1S
146767	1/8" X 48" X 96"	SERV TEMPERED HARDBOARD S1S
214818	1/8" X 48" X 96"	LIONITE TEMPERED HARDBOARD S2S
673258	1/8" X 48" X 96"	HARDBOARD S1S
228653	1/8" X 48" X 96"	SERV TEMPERED PERF HARDBOARD S1S
108657	1/4" X 48" X 96"	STANDARD HARDBOARD S1S
155075	1/4" X 48" X 96"	SERV TEMPERED PERF HARDBOARD S1S
673260	1/4" X 48" X 96"	HARDBOARD S1S
214817	1/4" X 48" X 96"	LIONITE TEMPERED HARDBOARD S2S
227780	1/4" X 48" X 96"	SERV TEMPERED PERF HARDBOARD S1S
146689	1/4" X 48" X 96"	STANDARD PERF HARDBOARD S1S

Additional Hardboard Items

ITEM #	SIZE	DESCRIPTION
687335	7/32" X 33" X 96"	HARDBOARD
647029	3/16" X 4' X 8'	GP CLUTTER CUTTER
713533	1/10" X 4' X 8'	STANDARD HARDBOARD
687334	1/8" X 48" X 66"	STANDARD
725258	1/8" X 5' X 8'	STANDARD PERF S1S
212873	1/8" X 4' X 8'	STANDARD PERF S1S
647382	1/8" X 4' X 8'	STANDARD HARDBOARD
351086	1/8" X 66" X 96.5"	STANDARD HARDBOARD
158498	1/4" X 4' X 8'	TEMPERED HARDBOARD S2S
740737	1/4" X 4' X 9'	TEMPERED HARDBOARD S2S
222305	1/4" X 4' X 12'	TEMPERED HARDBOARD S2S

VISIT BlueLinx AT WWW.BLUELINXCO.COM FOR ADDITIONAL PRODUCT LITERATURE

0

Hardboard Thickness & Physical Properties

Product Spe	cifications									
ANSI A13	5.4-2004 Ba	sic Hardboard		Moisture Resistance (Max. Average per Panel)		Tensile Strength (Min. Average per Panel)				
	Nomi	inal Thickness	Water Absorption	Thickness Swelling	(Minim	of Rupture um Average Panel)		illel to rface	Perpo to S	endicular Surface
Class	mm	inch	percent	percent	MPa	psi	MPa	psi	MPa	psi
1	2.1	1/12	30	25	41.4	6000	20.7	3000	0.90	130
Tempered	2.5	1/10	25	20						
	3.2	1/8	25	20						
	4.8	3/16	25	20						
	6.4	1/4	20	15						
	7.9	5/16	15	10						
	9.5	3/8	10	9						
2	2.1	1/12	40	30	31.0	4500	15.2	2200	0.62	90
Standard	2.5	1/10	35	25						
	3.2	1/8	35	25						
	4.8	3/16	35	25						
	6.4	1/4	25	20						
	7.9	5/16	20	15						
	9.5	3/8	15	10						
3	3.2	1/8	35	30	31.0	4500	13.8	2000	0.52	75
Service-	4.8	3/16	30	30						
Tempered	6.4	1/4	30	25						
	9.5	3/8	20	15						
4	3.2	1/8	45	35	20.7	3000	10.3	1500	0.34	50
Service	4.8	3/16	40	35						
	6.4	1/4	40	30						
	9.5	3/8	35	25						
	11.1	7/16	35	25						
	12.7	1/2	30	20						
	15.9	5/8	25	20						
5	6.4	1/4	50	30	13.8	2000	6.9	1000	0.17	25
Industrialite	9.5	3/8	40	25						
	11.1	7/16	40	25						
	12.7	1/2	35	25						
	15.9	5/8	30	20						

Lionite



Add personality

Lionite tileboard is an inexpensive alternative to tile and adds personality to bathrooms, kitchens, and utility rooms. Lionite's tough, baked-on melamine finish is water resistant and can be cleaned with soap and water. The broad selection of Lionite decorative colors and patterns are available in flat and scored surfaces. Colonial White or Sandstone Marble adds sophistication to any otherwise dreary space like a laundry room.

Tileboards – Hardboard Backer Paneling

Lionite

ITEM #	SIZE	DESCRIPTION
445102	1/8"	WHISPER MAUVE TILEBOARD (4" X 4")
214675	1/8"	COLONIAL WHITE FLAT
216763	1/4"	COLONIAL WHITE PERFORATED
222792	1/4"	COLONIAL WHITE FLAT MARKER BOARD
214682	1/8"	SANDSTONE MARBLE
445102	1/8"	WINTER WHITE

Jubilee

ITEM #	SIZE	DESCRIPTION
378704	3/16"	WHITE ICE BEADED DECO
215573	3/16"	COUNTRY TAVERN PERF
630369	3/16"	READY-TO-PAINT
216580	3/16"	COUNTRY TAVERN CEDAR GROOVED

Engineered Wood Substrates MDF Backer Paneling

Mount Vernon

ITEM #	SIZE	DESCRIPTION		
601498	5/32"	MOUNT VERNON OAK		
682093	5/32"	MOUNT VERNON NEW CUT CEDAR		

Paneling

A unique option

Paneling is used as an option to the more usual painted or textured wallpaper and drywall. It is also always sold in 4 X 8 ft. sheets. Because it is extremely thin and needs only minor adjustment for outlet and trims if done properly, wood paneling could be used in new installations on top of whatever material is currently on the wall. The bead board and some kinds of wood paneling are usually made of thin lumber. Many wood panelings are similar and vary only in type and quality of wood. Durable veneer sheets are very thin and cover up a lower quality sheet of wood, which serves as the base. A strip is fitted with groove and tongue edges in order to fit. It is the most costly type available because it is solid wood rather than the plywood. Wood wall paneling comes in several styles and species and can be finished in variety of ways, painted, or natural. The application to the wall could also be achieved by a large number of methods, groove and tongue, shiplap, reverse board, and batten.

Real Wood Paneling – Hardwood/Softwood Plywood Backer

Timber Ridge

	/ INGS	C			
ITEM # 742558 325900	SIZE 7/16" 7/16"	DESCRIPTION TIMBER RIDGE TIMBER RIDGE	COLOR MEDIUM OAK NATURAL OAK		
McKe	nzie			-4-	
ITEM #	SIZE	DESCRIPTION	COLOR	the second	
742042	1/4"	MCKENZIE	BROOKSTONE BIRCH	/ 包括	2
742561	1/4"	MCKENZIE	BRIGHTON OAK	TAL .	1
742424	1/4"	MCKENZIE	WHITECAP OAK	The second	
Bedfo	ord Villa	age		10	
ITEM #	SIZE	DESCRIPTION	COLOR	The second second	
742040	5.0 MM	BEDFORD VILLAGE	UNFINISHED NATURAL BIRCH		
742426	1/4"	BEDFORD VILLAGE	RUSTIC HONEY OAK	A C	
742425	5.0 MM	BEDFORD VILLAGE	UNFINISHED OAK		



5.0 MM BEDFORD VILLAGE ANN ARBOR BIRCH



METAL

INSULATION

ROOFING

Our warehouse pulls in on request.

Just-in-time inventory.

When you order inventory from BlueLinx, it's like having your very own warehouse. But without the messy overhead.

Order exactly what you need – whether it's a job lot quantity to optimize inventory levels or a full truckload to meet high-volume needs.



Sales: 888-502-BLUE • www.BlueLinxCo.com





<complex-block><complex-block>

Ordering from BlueLinx is that simple.

We've eliminated the confusing search for you by dividing our products into 10 categories. Get everything you need on one truck.

Call BlueLinx and get back to business!



Sales: 888-502-BLUE • www.BlueLinxCo.com

Outdoor Living

GAF CorrectDeck CX

GAF DuraLife

DuraLife RailWays Universal Railing
CorrectPorch
CorrectDock
Additional GAE Products


OUTDOOR LIVING

Info Corner: Composite or wood decking?

One type of green decking material is wood-plastic composite decking because it is made from recycled materials, including recovered wood fiber and recycled polyethylene plastics from items such as milk jugs and grocery sacks. We all know that style, cost, and maintenance, however, play a part in building such an important home addition. Composite or wood? Consider this:

- Wood has an authentic appearance with natural grains and glow.
- Wood homes and wood decking make a good marriage.
- Composite decking offers more design options.
- Both wood and composite can be impacted by temperature and other weather considerations.
- Composite is stronger than wood.
- Composite is more expensive than wood, but lasts longer.
- Composite decking comes with a 20- to 30-year limited warranty, depending on the manufacturer.

Again, composite or wood? The choice is yours!

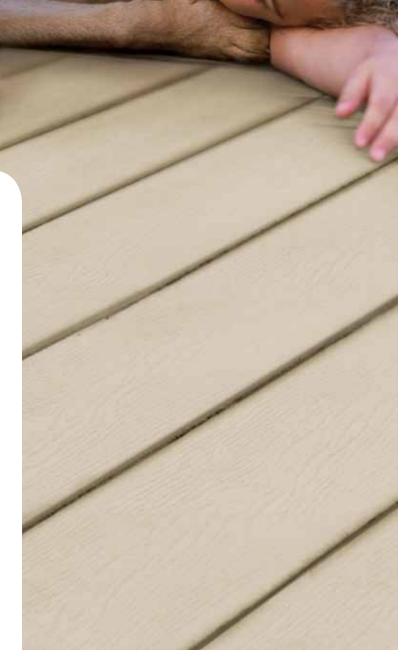

GAF CorrectDeck CX

Low maintenance and strong

Boasting ultra-low maintenance, CorrectDeck CX features enhanced anti-microbial protection that adds resistance to mold and mildew. Its co-extruded top layer fully encases the exposed wood fibers on the top and sides of each board providing added resistance to color fade and staining. Because CorrectDeck CX is made with tough plastic, you don't have to worry about wood fibers being exposed. GAF offers six unique colors in a rich embossed finish that keeps its integrity under the pressure of sun or rain.

Strength. Performance. Aesthetics.

- Made with a durable plastic to withstand more use and abuse
- Built-in resistance to staining, fading, mold, and mildew
- Rich colors that last, a deeply embossed woodgrain, and a unique hidden fastening system
- No exposed wood fibers on surface
- Environmentally friendly made of recycled materials; no toxic chemicals or preservatives
- Barefoot friendly, less slippery, and won't splinter; 30-year ltd. warranty*

For Fastener-Free Surfaces.

The FASTENATOR[®] Clip is available preloaded with a stainless steel, trim-head screw or without the screw for pneumatic stapling.

- One screw or staple per joist
- No pre-drilling
- No screw holes, except at perimeter
- Perfectly fits the groove designed into our channeled boards
- Installs from the top, not from underneath
- Allows for a clean, uniform deck surface installation







Stain Resistant

Protection from all kinds of grease and environmental stains

Fade Resistant

Concentrated UV inhibitors close to the surface for maximum color retention

Mold Resistant

 Antimicrobial product protection for an added layer of defense against a deck's worst enemies

* See Itd. warranty for complete coverage and restrictions

CEDAR





MAHOGANY





SAGE

GAF Fastenator

CHICAGOOTHERITEM #ITEM #124675123741123500123512

DESCRIPTION GAF FASTENATOR WITH SCREWS GAF FASTENATOR WITH SCREWS

SIZE 500 CT BUCKET 100 CT BUCKET

MEROT

250 SQ FT 50 SQ FT

VISIT	BlueLinx •••	A



CorrectDeck CX Products

CorrectDeck CX Classic

CHICAGO	OTHER				1
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR	l
124087	123000	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	CEDAR	
124096	123039	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	COASTAL GREY	
124106	123049	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	MAHOGANY	1
124112	123083	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	MERLOT	
124136	123098	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	PEBBLE	
124172	123141	GAF CORRECTDECK CX CLASSIC	5/4" X 6" X 16'	SAGE	

CorrectDeck CX Channeled CHICAGO OTHER

CHICAGO	UINER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124284	123301	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	CEDAR
124298	123338	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	COASTAL GREY
124309	123352	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	MAHOGANY
124320	123389	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	MERLOT
124325	123406	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	PEBBLE
124330	123436	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 12'	SAGE
124334	123441	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	CEDAR
124365	123472	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	COASTAL GREY
124371	123493	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	MAHOGANY
124375	123505	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	MERLOT
124393	123517	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	PEBBLE
124418	123543	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 16'	SAGE
124445	123566	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 20'	CEDAR
124464	123576	GAF CORRECTDECK CX CHANNELED	5/4" <mark>X 6" X 2</mark> 0'	COASTAL GREY
124530	123613	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 20'	MAHOGANY
124546	123619	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 20'	MERLOT
124555	123632	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 20'	PEBBLE
124565	123636	GAF CORRECTDECK CX CHANNELED	5/4" X 6" X 20'	SAGE

CorrectDeck CX Starter Board

. . . .

CHICAGO	OTHER			1
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124179	123178	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	CEDAR
124187	123184	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	COASTAL GREY
124215	123196	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	MAHOGANY
124220	123215	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	MERLOT
124227	123229	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	PEBBLE
124246	123235	GAF CORRECTDECK CX STARTER BOARD	5/4" X 6" X 16'	SAGE



Classic

The CorrectDeck CX Classic profile features a traditional fastener system and offers outstanding performance in a deck board. The CorrectDeck CX Classic board is fastened by pre-drilling and fastening with stainless steel trim head screws through the board and into the joists.

- Provides a wood-like finish with a tougher surface than most wood, wood composite, or PVC vinyl decking
- Cuts and installs just like wood
- Stronger, stiffer, and lighter (less flex between joists)

Channeled

Each CorrectDeck CX Channeled board is grooved on both sides to accommodate our Fastenator Hidden Fastening System. The Fastenator clips are available preloaded with a stainless steel trim head screw or without the screw to facilitate pneumatic stapling.

- Same benefits of CorrectDeck CX classic boards
- Unique hidden fastening system simplifies installation
- Surface remains free of screw holes for improved appearance

Starter

The CorrectDeck CX Starter board profile provides improved aesthetics and easy installation for edge board applications, especially when a "picture frame" design technique is utilized. The CorrectDeck CX Starter board profile has one side grooved for our hidden fastener system, while the other side has a clean, finished, bullnosed edge.

- Provides a clean finished edge when used together with our channeled profile
- Perfect for stair treads

GAF DuraLife

Natural grain collection

DuraLife Decking won't splinter or crack, and requires no annual sanding or staining – what could be easier? Naturally resistant to mold, mildew, and insects because it contains virtually no digestible nutrients, DuraLife Decking is designed to make outdoor living carefree and easy. Special low-maintenance composite formulations free you from the hassles of traditional wood decks, but maintain a textured, natural wood-grain finish.

Safe and durable decking with a realistic wood-grain finish


Available in four contemporary colors

- **Durable Construction:** Unique formula helps prevent splintering, warping, cracking, and rotting.
- Less Hassles: Unlike wood decks, DuraLife decking needs no annual scraping, sanding, or staining.
- Strong And Safe: Especially when combined with our RailWays railings that have an R1 Residential Rating – the highest rating possible.
- Peace Of Mind: Backed by a comprehensive 25-year ltd. warranty from GAF Materials Corporation, \$3 billion company (see ltd. warranty for complete coverage and restrictions).
- Reversible Board Finish: Natural deep wood grain emboss on one side & a contemporary "combed" emboss on the opposite side that allows customization (see photos).
- Long-Lasting Beauty: Naturally resistant to mold, mildew, and insects because it contains virtually no digestible nutrients.
- Special Formulation: High-density polyethylene and rice hulls composition helps eliminate exposed wood particles found in standard composite decking that typically leads to staining and fading issues.
- **Eco-Friendly:** Rice hulls are an abundant and renewable agricultural fiber.









Reversible board gives you more design options!

Mix and match the wood grain and combed sides of DuraLife boards, or even combine different colors to add interesting accents.





GAF DuraLife Groove Decking

CHICAGO	OTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
125119	113675	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 12	DRIFTWOOD
125126	117556	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 16	DRIFTWOOD
125144	117576	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 20	DRIFTWOOD
125157	124807	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 12	GOLDEN OAK – SPECIAL ORDER
125165	124824	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 16	GOLDEN OAK – SPECIAL ORDER
125172	124830	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 20	GOLDEN OAK – SPECIAL ORDER
125186	124837	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 12	BURNT WALNUT
125194	124843	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 16	BURNT WALNUT
125208	124852	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 20	BURNT WALNUT
125212	124860	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 12	REDWOOD
125226	124865	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 16	REDWOOD
125234	124871	GAF DURALIFE DECKING GROOVED	5/4 X 6 X 20	REDWOOD

GAF DuraLife No Groove Decking

CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124961	124696	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 16	DRIFTWOOD
124995	109706	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 20	DRIFTWOOD
125020	124706	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 12	GOLDEN OAK – SPECIAL ORDER
125028	124721	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 16	GOLDEN OAK – SPECIAL ORDER
125048	124728	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 20	GOLDEN OAK – SPECIAL ORDER
125069	124735	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 12	BURNT WALNUT
125079	124742	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 16	BURNT WALNUT
125084	124758	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 20	BURNT WALNUT
125102	124763	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 12	REDWOOD
125106	124786	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 16	REDWOOD
125110	124798	GAF DURALIFE DECKING NO GROOVE	5/4 X 6 X 20	REDWOOD

GAF DuraLife Fascia CHICAGO OTHER

CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
125263	117600	GAF DURALIFE FASCIA	1/2 X 7-1/2 X 12	DRIFTWOOD
125285	124889	GAF DURALIFE FASCIA	1/2 X 7-1/2 X 12	GOLDEN OAK – SPECIAL ORDER
125291	124893	GAF DURALIFE FASCIA	1/2 X 7-1/2 X 12	BURNT WALNUT
125300	124897	GAF DURALIFE FASCIA	1/2 X 7-1/2 X 12	REDWOOD

Choose Hidden Fasteners: For a better finished look...

DuraLife Decking can be installed using regular deck screws. But for a neater finished look, choose the unique Sabre™ Clip hidden fastener system. It makes installation a snap and delivers greater holding power than ordinary plastic clips.*

GAF Sabre Clip

	ary plastic c	111111			- Sector
	Sabre C	Clip			
ITEM #	ITEM #	DESCRIPTION	SIZE	COVERAGE	
231384	N/A	SABRE CLIP USED WITH DURALIFE DECKING	250 CT BUCKET	120 SQ FT	
* Used only f	or DuraLife Dec	cking			


219

Party and a

DuraLife RailWays Universal Railing

Mix and match

RailWays railing system is built around the concept of allowing the consumer to mix and match components. Traditional styles may mix with different-colored hand rails, posts, and balusters. Every baluster in the line is designed to be used with the manufacturer's easy-to-install Uni-ball[™], a universal fitting engineered to easily attach balusters to any of the company's rails.



RailWays Level Rail Kit

CHICAGO	OTHER				STANDA
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR	
126571	133546	GAF TRD LEVEL RAIL KIT	36" X 6'	BLACK	BLACK
126591	133553	GAF TRD LEVEL RAIL KIT	36" X 8'	BLACK	
126625	133559	GAF TRD LEVEL RAIL KIT	42" X 6'	BLACK	
126635	133574	GAF TRD LEVEL RAIL KIT	42" X 8'	BLACK	CEDAR
126653	133601	GAF TRD LEVEL RAIL KIT	36" X 6'	BURNT WALNUT	
126679	133620	GAF TRD LEVEL RAIL KIT	36" X 8'	BURNT WALNUT	GOLDEN OA
126708	133625	GAF TRD LEVEL RAIL KIT	42" X 6'	BURNT WALNUT	
126731	133637	GAF TRD LEVEL RAIL KIT	42" X 8'	BURNT WALNUT	
126813	133642	GAF TRD LEVEL RAIL KIT	36" X 6'	CEDAR	PEBBLE
126846	133653	GAF TRD LEVEL RAIL KIT	36" X 8'	CEDAR	
126879	133668	GAF TRD LEVEL RAIL KIT	42" X 6'	CEDAR	
126925	133685	GAF TRD LEVEL RAIL KIT	42" X 8'	CEDAR	
126946	133722	GAF TRD LEVEL RAIL KIT	36" X 6'	DRIFTWOOD	
126983	133729	GAF TRD LEVEL RAIL KIT	36" X 8'	DRIFTWOOD	
126996	133740	GAF TRD LEVEL RAIL KIT	42" X 6'	DRIFTWOOD	
127010	133746	GAF TRD LEVEL RAIL KIT	42" X 8'	DRIFTWOOD	
127036	133758	GAF TRD LEVEL RAIL KIT	36" X 6'	GOLDEN OAK – SPECIA	L ORDER
127055	133764	GAF TRD LEVEL RAIL KIT	36" X 8'	GOLDEN OAK – SPECIA	
131694	133779	GAF TRD LEVEL RAIL KIT	42" X 6'	GOLDEN OAK – SPECIA	
131716	133787	GAF TRD LEVEL RAIL KIT	42" X 8'	GOLDEN OAK – SPECIA	L ORDER
131722	133797	GAF TRD LEVEL RAIL KIT	36" X 6'	MAHOGANY	
131730	133806	GAF TRD LEVEL RAIL KIT	36" X 8'	MAHOGANY	
131740	133819	GAF TRD LEVEL RAIL KIT	42" X 6'	MAHOGANY	_
131786	133839	GAF TRD LEVEL RAIL KIT	42" X 8'	MAHOGANY	Featu
131802	133849	GAF TRD LEVEL RAIL KIT	36" X 6'	PEBBLE	Insta
131821	133880	GAF TRD LEVEL RAIL KIT	36" X 8'	PEBBLE	conv
131828	133889	GAF TRD LEVEL RAIL KIT	42" X 6'	PEBBLE	penc
131900	133894	GAF TRD LEVEL RAIL KIT	42" X 8'	PEBBLE	Mee
131907	133911	GAF TRD LEVEL RAIL KIT	36" X 6'	WHITE	Avail
131918	133914	GAF TRD LEVEL RAIL KIT	36" X 8'	WHITE	and
131941	133921	GAF TRD LEVEL RAIL KIT	42" X 6'	WHITE	▶ 20-y
131948	133937	GAF TRD LEVEL RAIL KIT	42" X 8'	WHITE	

STANDARD COLORS



Features and Benefits

- Installs in as little as half the time as conventional railings using our patentpending Uni-Ball Fastening System
- Meets R1-R4 residential rating*
- Available in 36" and 42" rail heights and 6' and 8' railing lengths**
- 20-year limited warranty***

* RailWays railing meets the R1, R2 rating when installed with the RailWays enhanced post mount. Must be installed to a code-approved structure. Check your local building codes. * RailWays railing meets the R1, R2 rating when installed with the RailWays enhanced post mount. Must be installed to code-approved structure. Check your local building codes.

**Railing length is measured from center of post to center of post.

***See Itd. warranty for complete coverage and restrictions

RailWays Post Sleeve

CHICAGO	OTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
132715	134823	GAF TRD POST SLEEVE	5" X 5" X 44"	BLACK
132752	134830	GAF TRD POST SLEEVE	5" X 5" X 108"	BLACK
132755	134838	GAF TRD POST SLEEVE	5" X 5" X 44"	BURNT WALNUT
132779	134843	GAF TRD POST SLEEVE	5" X 5" X 108"	BURNT WALNUT
132789	134849	GAF TRD POST SLEEVE	5" X 5" X 44"	CEDAR
132812	134852	GAF TRD POST SLEEVE	5" X 5" X 108"	CEDAR
132820	134861	GAF TRD POST SLEEVE	5" X 5" X 44"	DRIFTWOOD
132831	134886	GAF TRD POST SLEEVE	5" X 5" X 108"	DRIFTWOOD
132840	134901	GAF TRD POST SLEEVE	5" X 5" X 44"	GOLDEN OAK – SPECIAL ORDER
132850	134914	GAF TRD POST SLEEVE	5" X 5" X 108"	GOLDEN OAK – SPECIAL ORDER
132860	134929	GAF TRD POST SLEEVE	5" X 5" X 44"	MAHOGANY
132880	134934	GAF TRD POST SLEEVE	5" X 5" X 108"	MAHOGANY
132887	134943	GAF TRD POST SLEEVE	5" X 5" X 44"	PEBBLE
132891	134949	GAF TRD POST SLEEVE	5" X 5" X 108"	PEBBLE
132895	134958	GAF TRD POST SLEEVE	5" X 5" X 44"	WHITE
132909	134981	GAF TRD POST SLEEVE	5" X 5" X 108"	WHITE

RailWays Railing Cap


CHICAGO	OTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
133251	135370	GAF TRD CAP FLAT	5" X 5"	BLACK
133274	135373	GAF TRD CAP FLAT	5" X 5"	BURNT WALNUT
133291	135409	GAF TRD CAP FLAT	5" X 5"	CEDAR
133294	135434	GAF TRD CAP FLAT	5" X 5"	DRIFTWOOD
133313	135445	GAF TRD CAP FLAT	5" X 5"	GOLDEN OAK – SPECIAL ORDER
133327	135454	GAF TRD CAP FLAT	5" X 5"	MAHOGANY
133333	135460	GAF TRD CAP FLAT	5" X 5"	PEBBLE
133344	135463	GAF TRD CAP FLAT	5" X 5"	WHITE
133367	135483	GAF TRD CAP PYRAMID	5" X 5"	BLACK
133388	135500	GAF TRD CAP PYRAMID	5" X 5"	BURNT WALNUT
133394	135517	GAF TRD CAP PYRAMID	5" X 5"	CEDAR
133401	135562	GAF TRD CAP PYRAMID	5" X 5"	DRIFTWOOD
133421	135614	GAF TRD CAP PYRAMID	5" X 5"	GOLDEN OAK – SPECIAL ORDER
133432	135625	GAF TRD CAP PYRAMID	5" X 5"	MAHOGANY
133451	135643	GAF TRD CAP PYRAMID	5" X 5"	PEBBLE
133455	135647	GAF TRD CAP PYRAMID	5" X 5"	WHITE

Color combinations: Add a touch of color and individuality to your deck.





VISIT BlueLinx • AT WWW.BLUELINXCO.COM FOR ADDITIONAL PRODUCT LITERATURE

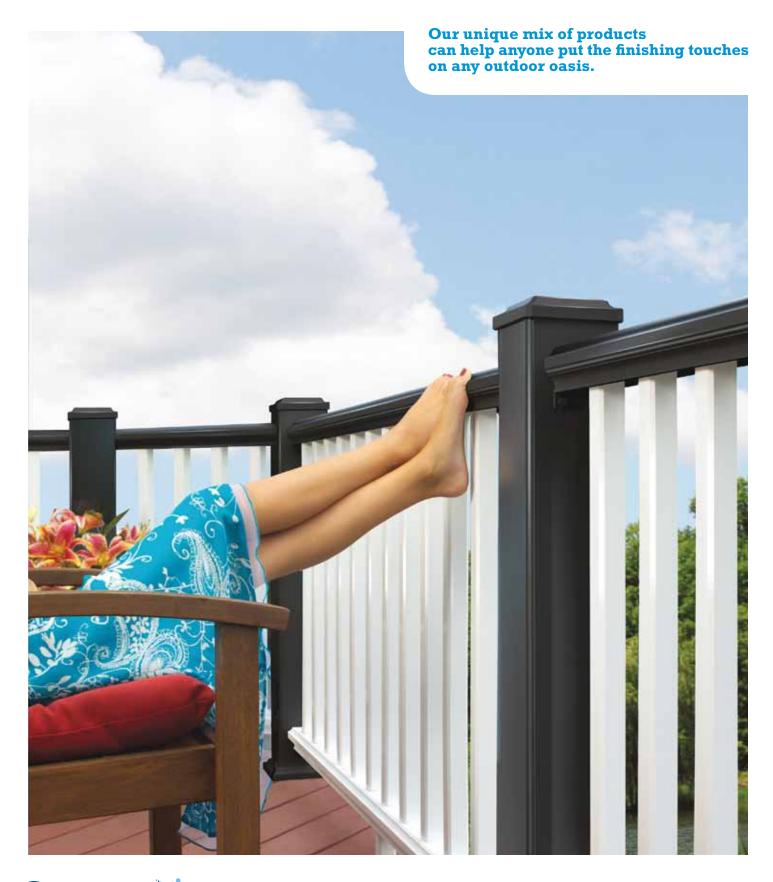

222

BlueLinx • AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

RailWays Base Trim

CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
133463	135653	GAF TRD BASE TRIM	5" X 5"	BLACK
133468	135677	GAF TRD BASE TRIM	5" X 5"	BURNT WALNUT
133476	135686	GAF TRD BASE TRIM	5" X 5"	CEDAR
133501	135689	GAF TRD BASE TRIM	5" X 5"	DRIFTWOOD
133515	135700	GAF TRD BASE TRIM	5" X 5"	GOLDEN OAK*
133526	135726	GAF TRD BASE TRIM	5" X 5"	MAHOGANY
133533	135734	GAF TRD BASE TRIM	5" X 5"	PEBBLE
133538	135745	GAF TRD BASE TRIM	5" X 5"	WHITE

* Golden Oak special order only

RailWays Hardware Kit CHICAGO OTHER

CHICAGO	UTHER	
ITEM #	ITEM #	DESCRIPTION
132914	134986	GAF TRD HARDWARE KIT LEVEL
132929	134998	GAF TRD HARDWARE KIT STAIR
132947	135002	GAF TRD HARDWARE KIT SWIVEL
132953	135023	GAF TRD HARDWARE KIT LEVEL
132956	135032	GAF TRD HARDWARE KIT STAIR
132959	135042	GAF TRD HARDWARE KIT SWIVEL
132964	135078	GAF TRD HARDWARE KIT LEVEL
132993	135091	GAF TRD HARDWARE KIT STAIR
133002	135110	GAF TRD HARDWARE KIT SWIVEL
133017	135113	GAF TRD HARDWARE KIT LEVEL
133030	135121	GAF TRD HARDWARE KIT STAIR
133050	135131	GAF TRD HARDWARE KIT SWIVEL
133096	135137	GAF TRD HARDWARE KIT LEVEL
133099	135155	GAF TRD HARDWARE KIT STAIR
133106	135185	GAF TRD HARDWARE KIT SWIVEL
133138	135208	GAF TRD HARDWARE KIT LEVEL
133167	135231	GAF TRD HARDWARE KIT STAIR
133216	135243	GAF TRD HARDWARE KIT SWIVEL
133220	135251	GAF TRD HARDWARE KIT LEVEL
133232	135262	GAF TRD HARDWARE KIT STAIR
133235	135287	GAF TRD HARDWARE KIT SWIVEL
133240	135303	GAF TRD HARDWARE KIT LEVEL
133243	135341	GAF TRD HARDWARE KIT STAIR
133248	135352	GAF TRD HARDWARE KIT SWIVEL

COLOR BLACK BLACK BLACK **BURNT WALNUT BURNT WALNUT BURNT WALNUT** CEDAR CEDAR CEDAR DRIFTWOOD DRIFTWOOD DRIFTWOOD GOLDEN OAK - SPECIAL ORDER **GOLDEN OAK - SPECIAL ORDER** GOLDEN OAK - SPECIAL ORDER MAHOGANY MAHOGANY MAHOGANY PEBBLE PEBBLE PEBBLE WHITE WHITE





WHITE



The GAF Warranty

Material Defect Coverage	"TYPICAL" Competitor's Deck & Rail Ltd. Warranty	GAF CorrectDeck CX Ltd. Warranty	GAF DuraLife Ltd. Warranty	GAF RailWays Ltd. Warranty
Decking				
100% Material Coverage – Non-Prorated	up to 25 years	30 years	25 years	20 years**
100% Labor Coverage – Non-Prorated	NO	5 years	5 years	5 years
Installation Clips Included	NO	NO	NO	NO
Transferability	YES	YES	YES	YES
Railing Purchased with Decking				
 100% Material Coverage – Non-Prorated 	up to 25 years	30 years	25 years	20 years**
 100% Labor Coverage – Non-Prorated 	NO	5 years	5 years	5 years
Transferability	YES	YES	YES	YES
Peace of Mind				
Labor To Remove Product	NO	YES	YES	YES
Disposal Of Product	NO	NO	NO	NO
Material Defect Coverage				
Warranty Valid Even If Product Is Installed Incorrectly	NO	NO	NO	NO

* Please Note: ** RailWays Railing has a 20-year warranty if installed separately from GAF Decking Systems.

- See Itd. warranties for complete coverage and restrictions.

– Transfer of the GAF Decking Systems Smart Choice Itd warranty is limited to one time only.

See additional manufacturer's warranties for other products.

GAF CorrectPorch

GAF CorrectPorch Flooring

CHICAGO	OTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
123956	121693	GAF CORRECTPORCH FLOORING	5/4" X 4" X 8'	GREY
123983	122436	GAF CORRECTPORCH FLOORING	5/4" X 4" X 10'	GREY
124013	122532	GAF CORRECTPORCH FLOORING	5/4" X 4" X 12'	GREY
124020	122568	GAF CORRECTPORCH FLOORING	5/4" X 4" X16'	GREY

GAF CorrectPorch Tread

.

CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124031	122612	GAF CORRECTPORCH TREAD	1-1/8" X 5-1/2" X 12'	GREY
124045	122657	GAF CORRECTPORCH TREAD	1-1/8" X 5-1/2" X 16'	GREY

GAF CorrectPorch Trim

.

UTHER			
ITEM #	DESCRIPTION	SIZE	COLOR
122767	GAF CORRECTPORCH QTR RND TRIM	10'	GREY
122820	GAF CORRECTPORCH HALF RND TRIM	10'	GREY
122879	GAF CORRECTPORCH OGEE TRIM	10'	GREY
	122767 122820	ITEM #DESCRIPTION122767GAF CORRECTPORCH QTR RND TRIM122820GAF CORRECTPORCH HALF RND TRIM	ITEM #DESCRIPTIONSIZE122767GAF CORRECTPORCH QTR RND TRIM10'122820GAF CORRECTPORCH HALF RND TRIM10'

GAF CorrectPorch Screws

CITICAGO	OTTIEN					
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR		
124098	122910	GAF CORRECTPORCH SCREWS	100 CT PK	STAINLESS STEEL		

GAF CorrectDock

GAF CorrectDock Dock Plank

	SILICAUO	OTTER			
I	TEM #	ITEM #	DESCRIPTION	SIZE	COLOR
1	124279	123244	GAF CORRECTDOCK DOCK PLANK	2" X 6" X 16'	GREY





Additional GAF Products

GAF CorrectDeck CX Care Kit


CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124174	123030	GAF CX CARE KIT	24 CT	CEDAR
124189	123104	GAF CX CARE KIT	24 CT	COASTAL GREY
124222	123147	GAF CX CARE KIT	24 CT	MAHOGANY
124138	123007	GAF CX CARE KIT	24 CT	MERLOT
124229	123202	GAF CX CARE KIT	24 CT	PEBBLE
124248	123220	GAF CX CARE KIT	24 CT	SAGE

GAF CorrectDeck CX Pen Kit


CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124291	123240	GAF CX PEN KIT	24 CT	CEDAR
124311	123305	GAF CX PEN KIT	24 CT	COASTAL GREY
124336	123314	GAF CX PEN KIT	24 CT	MAHOGANY
124354	123342	GAF CX PEN KIT	24 CT	MERLOT
124367	123356	GAF CX PEN KIT	24 CT	PEBBLE
124377	123393	GAF CX PEN KIT	24 CT	SAGE
124395	123445	GAF CX PEN KIT	24 CT	WHITE

GAF CorrectDeck CX Stain

CHICAGO	UTHER			
ITEM #	ITEM #	DESCRIPTION	SIZE	COLOR
124420	123455	GAF CX STAIN	12-8 OZ	CEDAR
124466	123497	GAF CX STAIN	12-8 OZ	COASTAL GREY
124532	123509	GAF CX STAIN	12-8 OZ	MAHOGANY
124548	123521	GAF CX STAIN	12-8 OZ	MERLOT
124557	123547	GAF CX STAIN	12-8 OZ	PEBBLE
124567	123570	GAF CX STAIN	12-8 OZ	SAGE
			and the second	the set of the set of the

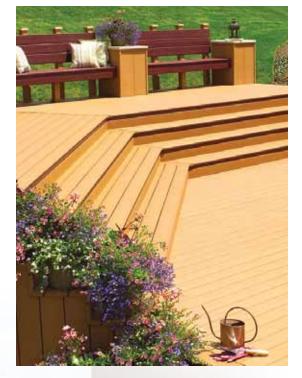


.

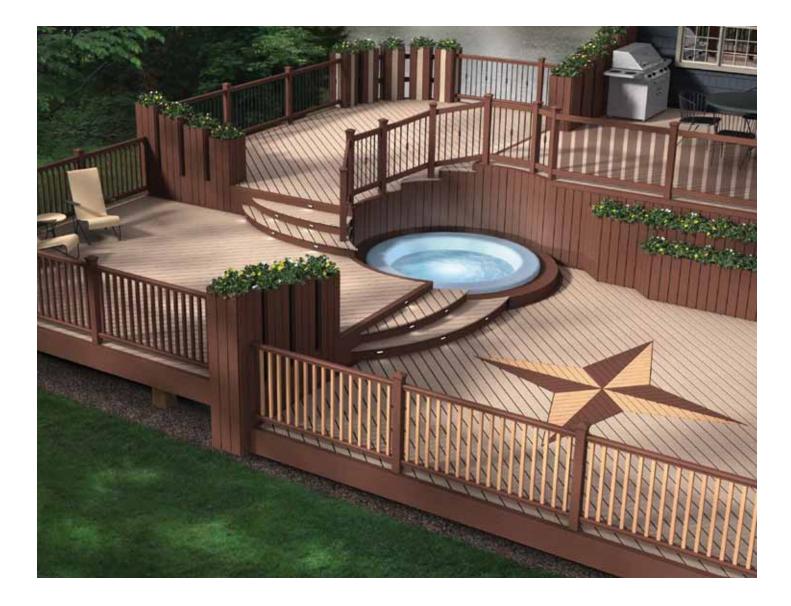

GAF CorrectDeck CX Screw Pack CHICAGO OTHER

CITICAGO	OTTER				
ITEM #	ITEM #	DESCRIPTION	SIZE	PACK SIZE	COLOR
124576	123580	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	CEDAR
124632	123622	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	COASTAL GREY
124648	123639	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	MAHOGANY
124656	123653	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	MERLOT
124677	123668	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	PEBBLE
124697	123676	GAF CX SCREW PACK	#8 X 2-1/2"	100 CT PK	SAGE
124707	123702	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	CEDAR
124737	123728	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	COASTAL GREY
124743	123759	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	MAHOGANY
124759	123814	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	MERLOT
124764	123832	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	PEBBLE
124787	123843	GAF CX SCREW PACK	#8 X 2-1/2"	350 CT PK	SAGE



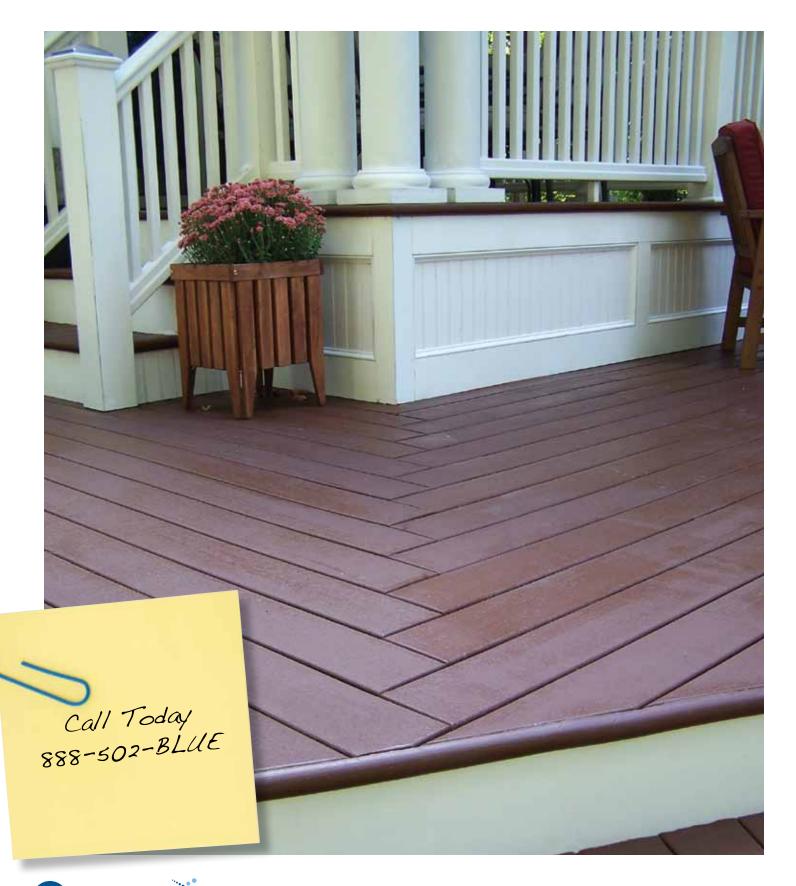

228

L BlueLinx *• AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

LET BLUELINX BE YOUR WAREHOUSE



Take care of your packaging needs with one phone call.

1-800-839-2588

Move.

Protect.

Strapping: steel, plastic, and woven Tools, buckles and seals Cardboard corner protectors Pallet covers and sheets Corrugated boxes in various sizes Specialty boxes (dish, wardrobe) Cushion wrap Stretch film

Ship.


Corrugated boxes in various sizes Cushion wrap Stretch film Mailing tubes



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

LET BLUELINX BE YOUR WAREHOUSE

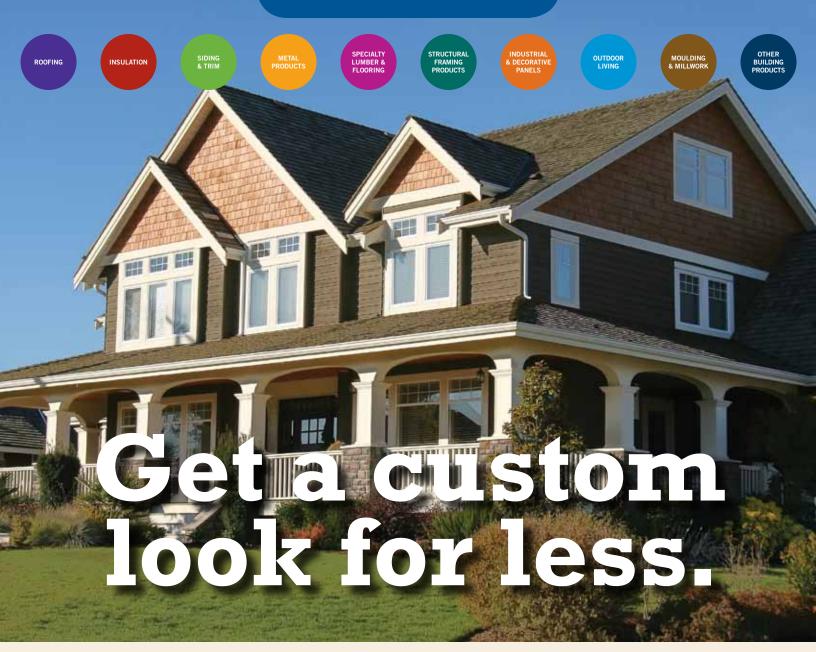

Get ahead of the Joneses.

Differentiate your homes without spending a fortune.

Set yourself apart from your competition with custom items.

Custom moulding, premium siding and trim, architectural columns, exclusive roofing accessories, striking decks and railings...and much more!



Sales: 888-502-BLUE • www.BlueLinxCo.com

Moulding & Millwork

HB&G Columns

Posts & Accessories

Moulding Directory

.....

An eye for detail Primer on Moulding

Homeowners with an eye for detail look to decorative moulding to add panache to their homes, even when it comes down to where the floor meets the walls. Combination mouldings provide a bold, beautiful transition between unlike surfaces. Whether homeowners are seeking a clean, crisp, modern look, or a more traditional appearance, the right floor moulding is an interior finish that shouldn't be compromised. Consider the elegant look of a moulding that creates a grid pattern on the ceiling to add interest to a kitchen, family room, or master bedroom. Turn the space underneath a stair well into a beautiful nook with wall moulding, but of course the right selection is crucial.

Info Corner: What species is best?



First determine if you want to paint or stain. How elaborate do you want the look? How much do you want to spend on your moulding type? In general, moulding falls into one of four categories:

- **Solid Pine, Oak, Poplar.** Pine has the most distinctive grain. Oak has a tighter grain and poplar has the most consistent grain of the three. Pine has a yellowish appearance while poplar is lighter. Oak comes in red oak and white oak with variations of cream and brown.
- Finger-Jointed Pine. Assembled from short lengths of clear lumber. Seams are visible and resemble fingers.
- **Primed Pine.** Prepared for painting with a coat of primer. Appears as if it's been painted white.
- **MDF (Medium Density Fiberboard).** Prepared for painting with a coat of primer. Appears as if it's been painted white. Smooth wood fiber back (no grain).





HB&G Columns

What is column perfection?

When the wall of each column maintains the same thickness, it assures there are no weak spots. This guarantee from HB&G, along with the use of more fiberglass, makes HB&G columns stronger than the competition, allowing them to be used as front porch support columns, decorative columns, and many other applications. PermaCast columns are weather proof, insect proof, and come with a lifetime warranty. Round columns can be fluted or plain, with or without the classic tapering of the upper two-thirds of the column. Square columns are available in a variety of styles, including plain, fluted, applied or recessed panel, and craftsman.

Plain Round PermaCast Columns

ITEM #	SIZE	DESCRIPTION	VENDOR #
668783	6" X 6'	PERMACAST PLAIN ROUND COLUMN	44020
668784	6" X 8'	PERMACAST PLAIN ROUND COLUMN	44040
668785	8" X 6'	PERMACAST PLAIN ROUND COLUMN	45030
659828	8" X 8'	PERMACAST PLAIN ROUND COLUMN BOXED	45050
690417	8" X 8'	PERMACAST PLAIN ROUND COLUMN SW	45050
611451	8" X 8'	PERMACAST PLAIN ROUND COLUMN SPLIT	45050S
639859	8" X 9'	PERMACAST PLAIN ROUND COLUMN	45051
482498	8" X 10'	PERMACAST PLAIN ROUND COLUMN	45070
482497	10" X 8'	PERMACAST PLAIN ROUND COLUMN	45090
668786	10" X 9'	PERMACAST PLAIN ROUND COLUMN	45104
482499	10" X 10'	PERMACAST PLAIN ROUND COLUMN	45110
565708	10" X 12'	PERMACAST PLAIN ROUND COLUMN	45130
472952	12" X 8'	PERMACAST PLAIN ROUND COLUMN	45150
482500	12" X 10'	PERMACAST PLAIN ROUND COLUMN	45170
560953	12" X 12'	PERMACAST PLAIN ROUND COLUMN	45190
649141	14" X 10'	PERMACAST PLAIN ROUND COLUMN	45290




Product Specifications

Round & Square PermaCast Load Bearing Specifications		
Split columns are not load bearing		
Column Diameter	Structural Load	
6"	8,000 lbs. Max	
8"	10,000 lbs. Max	
10"	14,000 lbs. Max	
12"	18,000 lbs. Max	
14"	20,000 lbs. Max	

Round PermaCast Inside Dimensions			
Inside diameter may vary up to 1/8"			
Splitting a column will decrease inside dimension 1/8"			
Column Size	Top I.D.	BOT I.D.	
6"	3-7/8"	4-7/8"	
8"	5-1/2"	6-7/8"	
10"	7-3/8"	8-7/8"	
12"	8-5/8"	10-7/8"	
14"	10-7/8"	12-7/8"	

Round PermaCast Column Dimensions (in inches)*					
Col. Size	6"	8"	10"	12"	14"
A	5-5/8"	7-5/8"	9-5/8"	11-5/8"	13-5/8"
В	4-5/8"	6-1/4"	8-1/8"	9-3/8"	11-5/8"
С	9"	10-1/2"	13-1/8"	16-1/2"	19-1/2"
D	1-7/16"	1-7/8"	2-3/8"	2-7/8"	3-3/8"
E	1-5/16"	1-3/4"	2-1/8"	2-3/8"	3-1/8"
F	9/16"	3/4"	3/4"	7/8"	1-1/8"
G	3/4"	3/4"	3/4"	13/16"	7/8"
J	1-1/4"	1-1/4"	1-1/4"	1-3/4"	2"
К	1-3/8"	1-1/2"	1-3/4"	2-1/4"	2-7/8"
L	8"	9-1/4"	11-1/4"	13-3/4"	17"
0	1"	1/2"	5/8"	3/4"	7/8"
Ν	6-1/4"	2-1/4"	2-1/4"	2-5/8"	2-5/8"
R	3-15/16"	4-3/8"	5-1/4"	6-1/8"	7-5/8"
т	4-7/16"	4-1/2"	5"	5-3/4"	7"

* There may be a variance of up to 1/4" in all dimensions. Fluted columns available in all diameters. Plain round PermaCast columns can be trimmed at least 24" with the following exceptions 6" x 6'-8', 14" x 9'-12'

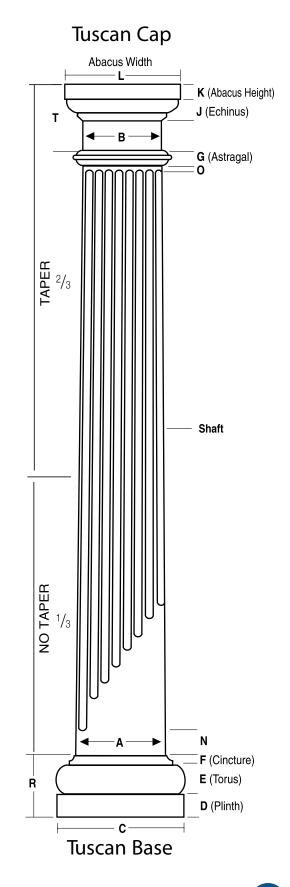



Fluted Round PermaCast Columns

ITEM #	SIZE	DESCRIPTION
659822	8" X 8'	PERMACAST FLUTED ROUND COLUMN

VENDOR # 45060



Tuscan Cap & Base Set - Round PermaCast ITEM # SIZE DESCRIPTION **VENDOR #** 668851 6" TUSCAN CAP & BASE SET PERMACAST ROUND 44091 TUSCAN CAP & BASE SET PERMACAST ROUND TUSCAN CAP & BASE SET PERMACAST ROUND SPLIT TUSCAN CAP & BASE SET PERMACAST ROUND TUSCAN CAP & BASE SET PERMACAST ROUND TUSCAN CAP & BASE SET PERMACAST ROUND 475341 8" 45081 611453 8" 611453 8" 486736 10" 472953 12" 45081S 45141 472953 12" 45261 649142 14" 45401

Plain Round Wood Columns

ITEM #SIZEDESCRIPTION7045168" X 8'PLAIN ROUND WOOD COLUMN PRIMED

VENDOR # 00052P





Round Tuscan Base

Fluted Round Wood Columns

ITEM #SIZEDESCRIPTION6598208" X 8'FLUTED ROUND WOOD COLUMN

VENDOR # 00061

VENDOR #

13030

Standard Poly Cap & Base Set

ITEM #SIZE4189368"

CAP & BASE SET FOR ROUND WOOD





Versatility of square columns

The design and versatility of an HB&G square column has enhanced its popularity with today's architects. The HB&G Square PermaCast column lineup includes square, plain, and fluted. An unlimited combination of styles can be achieved by various uses of the panel moulding, neck moulding, and caps and bases. Additionally, the square column is not tapered and can be cut to any height without affecting the fit of the caps and bases.

Plain Square PermaCast Columns

ITEM #	SIZE	DESCRIPTION	VENDOR #
668910	6" X 8'	PERMACAST PLAIN SQUARE COLUMN	45990
634430	8" X 8'	PERMACAST PLAIN SQUARE COLUMN	46010
644461	8" X 10'	PERMACAST PLAIN SQUARE COLUMN	46012

Recessed Square PermaCast Columns

ITEM #	SIZE	DESCRIPTION	VENDOR #
689026	8" X 8'	RECESSED PANEL PERMACAST SQUARE COLUMN	46382

Recessed Panel Load Bearing Specifications for an 8" diameter column is 10,000 lbs. max.

.

Tuscan Cap & Base Set - Square PermaCast

ITEM #	SIZE	DESCRIPTION
668930	6"	TUSCAN CAP & BASE SET PERMACAST SQUARE
634432	8"	TUSCAN CAP & BASE SET PERMACAST SQUARE

VENDOR # 54297 54301

Product Specifications

Square PermaCast Inside Dimensions Inside dimensions may vary up to 1/8".		
Splitting a column will decrease inside dimension 1/8".		
Column Size	Inside	
6"	5 1/4"*	
8"	6 7/8"	
*Inside is Round		

Recessed Panel Square Permacast		
Column Size	Inside	
8"	5 5/8"	

Craftsman Square PermaCast Columns

ITEM #	SIZE	DESCRIPTION
687975	10"X 5.5"X66"	HB&G CRAFTSMAN COLUMN SHAFT
687979	CAP & BASE	HB&G CRAFTSMAN
687976	16'X9"X 58"	HB&G CRAFTSMAN COLUMN SHAFT
687980	CAP & BASE	HB&G CRAFTSMAN

VENDOR # 46358 46358/46359 46350 46350/46351

Product Specifications

Craftsman Inside Dimensions			
Inside dimensions may	vary up to 1/8"		
Splitting a column will	Splitting a column will decrease inside dimension 1/8".		
Column Size	Тор	Bottom	T
10" x 5-1/2"	4.5"	9"	-
16" x 9"	8"	15"	

Recessed Panel Load Bearing Specifications		
For an 8" diameter, col	umn is 10,000 lbs max.	
Craftsman Load Bearing Specifications		
(Split columns are not load bearing)		
Column Diameter Structural Load		
10" x 5-1/2" 10,000		
16" x 9" 14,000		



Posts & Accessories

Warm and inviting

HB&G PermaPost is made from a super low-maintenance polyethylene and is finished white so it can be painted or left unpainted. With a load bearing of up to 5,000 lbs., you can expect both strength and appeal for years to come. The PermaPost is composed of a polyethylene shell that surrounds a galvanized steel pipe (20 gauge for the 5" post, 13 gauge for the 6" post) and polyurethane foam filler. For a warm and inviting decorative look for your front porch, choose from either the 5" or 6" Colonial post.

Permaposts

SIZE	DESCF
5" X 5" -9'	PERM
6" X 6" -8'	PERM
	5" X 5" -9'

DESCRIPTION PERMAPOST COLONIAL PERMAPOST COLONIAL VENDOR # PP5X9FF PP6X8HD

PermaPost Fastening Systems

ITEM #	SIZE	DESCRIPTION	VENDOR #
659824	5"	PERMAPOST FASTENING SYSTEM	3869
659825	6"	PERMAPOST FASTENING SYSTEM	3869



Tips for ordering and installing HB&G Columns:

- Verify exact opening measurement prior to ordering column length.
- When installing a PermaCast column, verify concentric loading of column.
- ▶ 100% of bottom must contact substrate and 75% of top must contact soffit.
- When attaching hand rails or corner iron to PermaCast columns, holes must be pre-drilled before applying screws.
- When ordering panel molding for square PermaCast columns, make sure to order enough for four sides of the column.
- Split columns are left partially intact. Cut with masonry or carbide tip blade.





Aluminum Plinth Blocks

ITEM #	SIZE	DESCRIPTION	VENDOR
659823	3-1/4" X 3-1/4"	ALUM PLINTH	01070
659829	4-1/4" X 4-1/4"	ALUM PLINTH	01080
659830	5-1/4" X 5-1/4"	ALUM PLINTH	01090

Column Installation Kits

ITEM #	SIZE	DES
699088	N/A	COL

SCRIPTION LUMN INSTALLATION KIT 17040

.

VENDOR #

#

BlueLinx' value-driven millwork strategy promotes long-term customer relationships. We encompass various advantages that benefit you, such as our global supply chain capabilities, knowledgeable sales professionals, and logistics expertise. We differentiate ourselves as a millwork supplier by providing a market-appropriate product mix, effective business solutions, and unparalleled service.



Moulding Profile Directory

All profiles are scaled at 30% of actual size.

Page #	Profile	Page #	Profile
246	Crown	270	Screen Mould
250	Bed Mould	270	Lattice
250	Cove	272	S4S Board
251	Picture Mould	273	E2E Board
252	Casing	273	Square
256	Mullion Casing	274	Rake Mould
256	Brick Mould	274	Shingle/Panel Mould
256	Drip Cap	275	Chamfer
257	Stop	275	Glass Bead
258	Backband	276	Shelf Cleat
258	Stool	276	Jamb
259	Sill Stock	276	Frame
259	Chair Rail		
260	Ply Cap	1	
260	Panel Mould		
261	Outside Corner		
262	Base		
267	Base Cap	and the second second	
267	Base Shoe	Contraction of the second	
268	Handrail		ann.
268	Full Round	1. 6	
269	Half Round		
269	Quarter Round		

SPECIES DESCRIPTION

_

PINE Pine
MDF Primed Medium Density Fiberboard
PRIMED Single-Primed FJ Pine
OAK
JPRMD Jesso FJ Primed Pine
P-VEN
O-VEN
BAN

Terminology

Crown – Adding a touch of class, crown moulding is a decorative type of trim that is used to line the area where the ceiling of a home meets the wall. Crown comes in many designs.

Bed – A moulding in an angle, as between the overhanging cornice or eaves of a building and the sidewalls, the bed moulding can either be plain or sprung.

Cove – Cove mouldings have a concave profile and are often used as inside corner guards or to hide joists. Cove moulding can also be used as a transition to a mantle or shelf.

Picture Rail – Picture rail moulding is applied to the circumference of the room near the ceiling and is used in conjunction with hooks to hang pictures or other artwork.



Casing – Casing is the framework for doors, windows or stairways. The most visible part of the trim, casings are smaller and thicker than base mouldings. Design and weight vary.

Brick – Brick moulding has no brick in it, but earns its name for the support that it provides around your exterior doors. Brick moulding does need to be replaced occasionally.

Drip Cap – Drip cap is a horizontal moulding installed over the frame for a door or window to direct water away from the frame.

Backband – Backband mouldings are used in conjunction with casing or baseboard to create various trim options and door surrounds.

Stop – Also known as "shoe stop," stop moulding is only 3/8 to 1/2 inch thick x 1-1/2 inches wide and usually has a 90 degree angle where the door contacts the inside edge.

Stool – Stool moulding adds more depth to windows; also known as sills.

Sill Stock – The foundation for windows, sill stock is produced in simple rectangular form. Sills are offered with smooth edges or machine pitched along one long edge.

Plinth Block – Used to raise an architectural element such as a column or monument, a plinth block is also used as trim for doors, windows or fireplaces.

Chair Rail – This decorative moulding is placed at a height on the wall comparable to the place where the back of a chair would impact the wall surface.

Ply Cap – Usually located at the head of a window or door, ply cap moulding enhances the trim of the casing.

Panel – Usually very small with intricate features, panel moulding is used to simulate the look of frame and panel work. It can also be used to add detail to cabinets, furniture, and mantels.

Outside Corner – Corner moulding has two excellent uses: protect edges from damage and abrasion, and to cover the exposed edge of surface material such as wood veneer or plastic.

Base – Base moulding is used at the junction of an interior wall and floor to protect the wall from impacts.

Base Cap – Base caps are used as an addition to regular baseboard moulding to create a finished and more complex architectural moulding.

Base Shoe – Generally used when the floor finish is hard, a base shoe is a small moulding combined with a base moulding to complete the trimming of the wall and floor intersection.

Handrail – Handrails are a rare opportunity to show off design flair and be functional. Aluminum, bronze or wood moulding turns a necessity into an elegant addition for any home.



Full Round – Full round moulding contains a perfect circular shape after the cutting process.

Half Round – Often used in red and white oak, half round moulding results from the method of cutting veneers on an off-center lathe, which produces modified characteristics. A cross section of a half round looks like a half circle and is primarily used as decorative trim.

Quarter Round – Quarter rounds come in several sizes and serve a variety of functions. They are most often used with baseboards in the same function as base shoes.

Screen – This small moulding hides the area where a screen is attached to a frame.

Chamfer – A chamfer is a beveled edge connecting two surfaces.

Glass Bead – Glass bead is used to hold glazing in place in windows. It's also known as glass stop, cove and bead, putty bead, glazing bead, and staff bead.

Cleat – A cleat is installed on the dividers beneath shelves in order to support the weight of objects on the shelves.

Jamb – A door jamb is a finished piece of wood placed on the inside of a door frame. Usually three boards make up the door jamb, along with a threshold at the bottom.

Frame – A frame is the utility part of a door frame, where the door is hinged.



Crown Moulding

Adding a touch of class, crown moulding is a decorative type of trim that is used to line the area where the ceiling of a home meets the wall. Crown comes in many designs. Formal, dramatic or streamlined and simple, ceiling moulding helps smooth the transition from walls to ceiling and add unmistakable impact.



CROWN LWM 47 15MM X 4-5/8 MDF - R/L - 628847



CROWN LWM 47 15MM X 5-1/4 STRETCH PRMD MDF - 16' - 637603



CROWN LWM 47 9/16 X 5- 1/4 PINE - R/L - 208519



CROWN LWM 47 11/16 X 5-1/4 PINE - R/L - 219236 JPRMD - 16' - 697248



CROWN WM 48 11/16 X 4-1/4 OAK - R/L - 233156



CROWN LWM 48 9/16 X 4-1/4 JPRMD - R/L - 695220



CROWN LWM 48 15MM X 4-1/4 MDF - R/L - 696657



CROWN LWM 48 9/16 X 4-1/4 PINE - R/L - 155965 PRMD - 16' - 206635



CROWN WM 49 11/16 x 3-5/8 OAK - R/L - 219164



CROWN LWM 49 9/16 X 3-5/8 PINE - R/L - 127100 JPRMD - 16' - 695221



CROWN LWM 49 9/16 x 3-5/8 JPRMD - R/L - 695221 PINE - R/L - 127100



CROWN LWM 49 15MM X 3-5/8 MDF - R/L - 626467



CROWN WM 51 11/16 X 3-1/4 OAK - R/L - 378005




CROWN LWM 51 9/16 X 3-1/4 PINE - R/L - 189094



CROWN WM 52 9/16 X 2-3/4 PINE - 16' - 154315



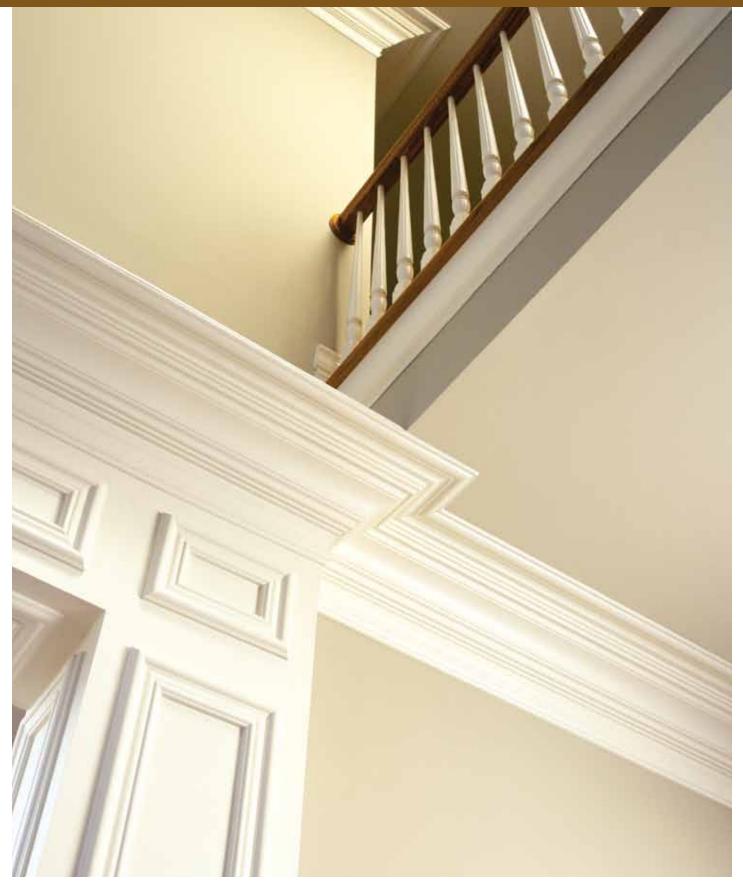





CROWN GM 655 3/4 X 5-1/4 MDF - R/L - 710903



CROWN WM 54 9/16 X 2-1/4 PINE - R/L - 131017



CROWN GM 349 11/16 X 5-1/4 MDF - R/L - 719700




CROWN GM 340 11/16 X 3-3/8 MDF - R/L - 719711



CROWN GM 327 3/4 X 6 MDF - R/L - 710562



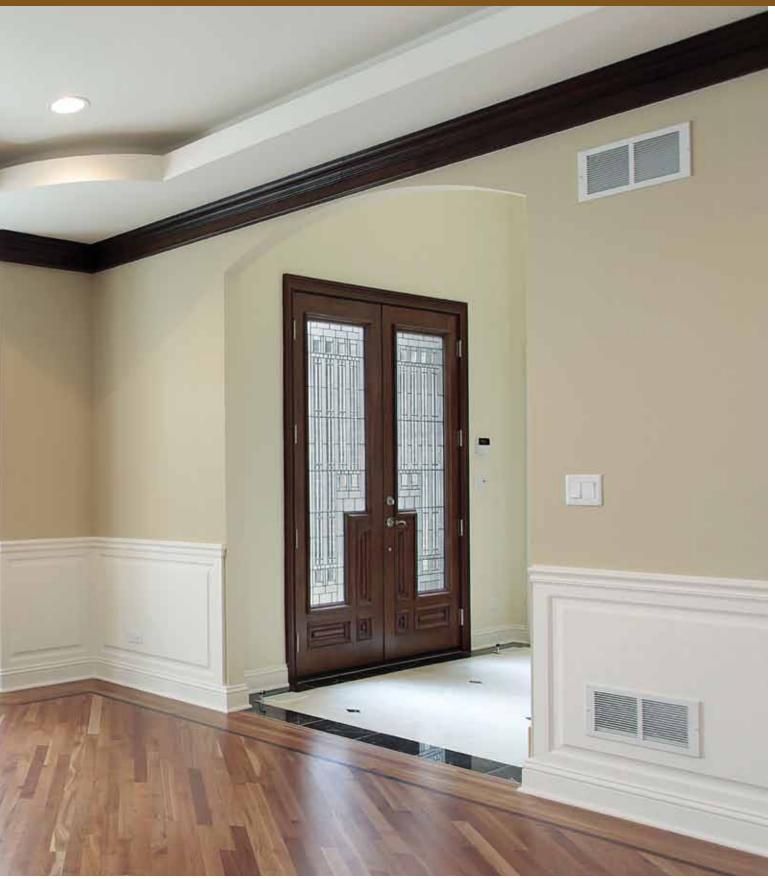

Bed Mould

A moulding in an angle, as between the overhanging cornice or eaves of a building and the sidewalls, the bed moulding can either be plain or sprung. Current trends in home design offer many beautiful and interesting applications, and bed moulding is just the accessory that makes a quiet splash.



BED MOULD WM 74 9/16 X 1-3/4 PINE - R/L - 148247

Cove

Cove mouldings have a concave profile and are often used as inside corner guards or to hide joists. Cove moulding can also be used as a transition to a mantle or shelf. Go wild and surround a flat screen television with a cove moulding to transform technology into a terrific design detail.



COVE WM 84 9/16 X 2-1/4 PINE - R/L - 150721



COVE WM 85 9/16 X 1-3/4 PINE - 8/0 - 160555 PINE - R/L - 151598



COVE WM 93 3/4 X 3/4 OAK - 8/0 - 182440 OAK - R/L - 193086 PINE - 8/0 - 120428 PINE - R/L - 170745



COVE WM 94 11/16 x 1-1/8 PINE - 8/0 - 132580 PINE - R/L - 181561



COVE WM 100 11/16 X 11/16 PINE - 8/0 - 177066 PINE - R/L - 159295





COVE WM 101 1/2 X 1/2 PINE - R/L - 152107

Picture Mould

Picture rail moulding is applied to the circumference of the room near the ceiling and is used in conjunction with hooks to hang pictures or other artwork. Because most mouldings are made of wood or wood fibers (such as MDF), they should be handled with care to prevent them from getting dirty or damaged.



PICTURE MOULD WM 273 11/16 X 1-3/4 PINE - R/L - 160500



Casing

Casing is the framework for doors, windows, or stairways. The most visible part of the trim, casings are smaller and thicker than base mouldings. Design and weight vary. Remember that if you will be storing the casing before using it, do so in a clean, dry place.



CASING

LGM 72

5MM X 3-1/2

MDF - R/L - 634225



CASING GM 155 3/4 X 3-1/2 MDF - R/L - 719694



CASING LGM 195 15MM X 3-1/4 MDF - R/L - 674076



CASING GM 299 15MM X 2-3/4 MDF - R/L - 719697



CASING GM 312 ^{5/8 X 3} MDF - R/L - 641054



CASING WM 315 11/16 X 2-1/2 PINE - R/L - 124643



CASING WM 316 11/16 X 2-1/4 PINE - 6/8 - 204007 PINE - R/L - 101410 PRIMED - 6/8 - 488129 PRIMED - R/L - 184954



CASING WM 324 11/16 X 2-1/4 PINE - R/L - 130703



CASING LWM 324 1/2 X 2-1/4 OAK - 6/8 - 152256 OAK - R/L - 185403



CASING WM 327 11/16 x 2-1/4 PINE - 6/8 - 203836 PINE - R/L - 180055



CASING LWM 328 9/16 X 2-1/4 OAK - 6/8 - 428447 OAK - R/L - 379391



CASING LWM 332 11/16 X 3-1/4 PINE - R/L - 699560 STL JPRMD - 15' - 677676



CASING WM 351 11/16 X 2-1/2 PINE - R/L - 155232




CASING WM 356 11/16 X 2-1/4 PINE - R/L - 191533 PINE - 6/8 - 205521 JPRMD - 14' - 695215 JPRMD - 6/8 - 695222



CASING LWM 356 9/16 X 2-1/4 OAK - 6/8 - 269964 OAK - R/L - 269961



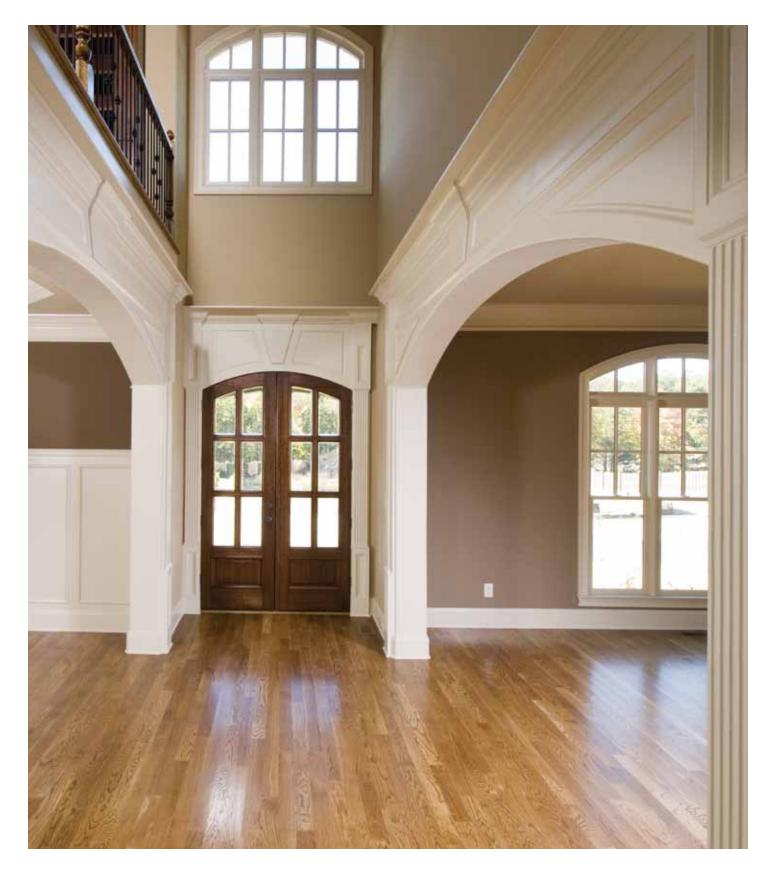



CASING LWM 356 1/2 X 2-1/4 OAK - 6/8 - 223142 OAK - R/L - 128242



CASING LWM 356 15MM X 2-1/4 MDF - 6/8 - 616283 MDF - R/L - 616271



CASING WM 361 11/16 X 2-1/2 PINE - R/L - 190674



CASING LWM 361 11/16 X 3-1/2 JPRMD - R/L - 695218 OAK - R/L - 363437 PINE - 7/3 - 265539 PINE - R/L - 119487



CASING LWM 361 11/16 X 3-1/4 PINE - R/L - 717539 JPRMD - 695234



CASING WM 366 11/16 X 2-1/4 PINE - R/L 265507 PINE - 6/8 - 204009 JPRMD - 14' - 695229



CASING LWM 366 11/16 X 2-1/4 PINE - 7/0 - 340231 PRIMED - R/L - 111437



CASING WM 430 9/16 X 4-1/4 PINE - R/L - 167920 CASING LWM 430 9/16 X 5-1/2 PINE - R/L - 107976 CASING WM 432 9/16 X 3-1/2 JPRMD - R/L - 695217 PINE - R/L - 138939



CASING LWM 432 12MM X 3-1/2 MDF - R/L - 696689



CASING LWM 444 11/16 X 3-1/4 PINE - 8/0 - 102553 PINE - R/L - 172189 JPRMD - R/L - 695216



CASING LWM 444 15MM X 3-1/4 MDF - 7/2 - 638172 MDF - R/L - 629872



CASING LWM 444 11/16 X 3-1/4 COLONIAL PRMD - 15' 315988



CASING LWM 444 11/16 X 3-1/2 PINE - R/L - 188240 JPRMD - 14' - 695232





CASING LWM 445 3/4 X 3-1/4 OAK - R/L - 290030



CASING LWM 445 15MM X 3-1/4 MDF - R/L - 626461



CASING LWM 445 11/16 X 3-1/4 JPRMD - R/L - 695219



CASING GM 457 11/16 X 2-3/4 JPRMD - R/L - 695230



CASING WM 472 9/16 X 2-1/2 PINE - R/L - 114047



CASING

LWM 472 1/2 X 2-1/4 OAK - R/L - 696067

CASING WM 492 7/16 X 2-1/2 PINE - R/L - 136817



GM 3121 11/16 X 3-1/2 MDF - R/L - 719708



CASING GM 4442 11/16 X 3-1/4 OAK - R/L - 697568



CASING GM 4524 18MM X 3-1/2 MDF - R/L - 662626



CASING GM 4524 11/16 X 3-1/2 JPRMD - R/L - 107991 CASING

GM 4555 13/16 X 3-1/2 OAK - R/L - 624866



Mullion Casing

An interior or exterior casing member to cover the mullion joint between single windows, mullion casing can make the difference in a multiple window unit because of its practical application.



MULLION CASING LWM 983 3/8 x 1-3/8 PINE - R/L - 267597

Brick Mould

Brick moulding has no brick in it, but earns its name for the support that it provides around your exterior doors. Brick moulding does need to be replaced occasionally.



.



BRICK MOULD WM 180

1-1/4 X 2 JPRMD - R/L - 695208 PINE - R/L - 181799 PRIMED - 10/0 - 269947 PRIMED - 8/0 - 354057 PRIMED - R/L - 173726

Drip Cap

Drip cap is a horizontal moulding installed over the frame for a door or window to direct water away from the frame. It prevents deterioration and water damage.



DRIP CAP WM 188 1-1/16 x 1-5/8 PINE - R/L - 167046



DRIP CAP WM 197 11/16 X 1-5/8 PINE - R/L - 122584





.

Stop

Also known as "shoe stop," stop moulding is only 3/8 to 1/2 inch thick x 1-1/2 inches wide and usually has a 90 degree angle where the door contacts the inside edge.



STOP

WM 816

7/16 X 1-3/8



STOP LWM 843 7/16 X 2-1/8 PINE - R/L - 155744



STOP WM 845 7/16 x 1-5/8 PINE - R/L - 178294



STOP WM 846 7/16 X 1-3/8 PINE - 7/0 - 460024 PINE - R/L - 124372



STOP WM 847 7/16 X 1-1/4 PINE - R/L - 134754



PINE - R/L - 192961

STL PINE - 7/0 - 371103

STOP LWM 853 3/8 X 2-1/8 OAK - R/L - 715599



STOP WM 855 3/8 x 1-5/8 OAK - R/L - 715600



STOP WM 857 3/8 X 1-1/4 OAK - 6/8 - 543409 OAK - R/L - 523878 PINE - 6/8 - 295011 PINE - R/L - 146407



STOP LWM 873 7/16 X 2-1/8 PINE - R/L - 173566



STOP WM 875 7/16 X 1-5/8 PINE - R/L - 138997



STOP WM 876 7/16 x 1-3/8 PINE - R/L - 155335 PINE - 7/0 - 370054



STOP WM 887 3/8 X 1-1/4 OAK - R/L - 160991 PINE - 6/8 - 226742 PINE - R/L - 251737 PRIMED - 6/8 - 392877



STOP WM 906 7/16 x 1-3/8 PINE - R/L - 158871



STOP LWM 933 7/16 X 2-1/8 PINE - R/L - 180249



STOP WM 935 7/16 X 1-5/8 PINE - R/L - 164392



STOP WM 936 7/16 x 1-3/8 PINE - R/L - 165830 PINE - 7/0 - 337142



STOP WM 937 12MM X 1-1/4 MDF - 7/0 - 662627



STOP WM 937 7/16 X 1-1/4 PINE - 7/0 - 617568 PINE - R/L - 646007



STOP LWM 943 3/8 X 2-1/8 OAK - R/L - 715521



STOP WM 947 3/8 X 1-1/4 OAK - 6/8 - 218067 OAK - R/L - 218063 PINE - 7/0 - 455401 PINE - R/L - 100550 PRIMED - 6/8 - 521008 PRIMED - R/L - 233150



Backband

Backband mouldings are used in conjunction with casing or baseboard to create various trim options and doors. A backband moulding is the perfect way to bring a design together and make it just a touch more elaborate.



BACK BAND WM 280 11/16 X 1-1/16 PINE - R/L - 156489

Stool

Stool moulding adds more depth to windows; also known as sills.



STOOL 1021 18MM X 5-1/4 PRMD MDF - 645138



STOOL WM 1153 11/16 X 3-1/4 PINE - R/L - 132600



Sill Stock

The foundation for windows, sill stock is produced in simple rectangular form. Sills are offered with smooth edges or machine pitched along one long edge.

SILL STOCK LGM 1500 1-1/4 x 6-9/16 PRIMED - R/L - 627397

Chair Rail

This decorative moulding is placed at a height on the wall comparable to the place where the back of a chair would impact the wall surface. Chair rails can beautifully accent a room while protecting walls from scuffs and scratches.



CHAIR RAIL LWM 300 25MM X 3 PRMD MDF - 16' - 626468



CHAIR RAIL WM 390 11/16 X 2-5/8 PINE - 8/0 - 193772 PINE - R/L - 107756



CHAIR RAIL LWM 390 11/16 X 2-1/2 PINE - R/L - 187203 PRIMED - R/L - 467914



CHAIR RAIL LWM 390 5/8 x 2-1/2 OAK - R/L - 378505



CHAIR RAIL LWM 390 15MM X 2-5/8 MDF - R/L - 460096



259



CHAIR RAIL LWM 390 11/16 X 2-5/8 PRMD - 16' - 545179

Ply Cap

Usually located at the head of a window or door, ply cap moulding enhances the trim of the casing. Ply caps can be used in stacking, or combining two or more moulding profiles, to achieve a custom look without much added expense.



PLY CAP WM 292 9/16 X 1-1/8 PINE - 8/0 - 167190 PINE - R/L - 162538

Panel Mould

Usually very small with intricate features, panel moulding is used to simulate the look of frame and panel work. It can also be used to add detail to cabinets, furniture, and mantels.



PANEL MOULD **GM 75** 11/16 X 1-7/8 PINE - R/L - 646046



PANEL MOULD LWM 185 9/16 X 1-1/2 PINE - R/L - 138799 PRIMED - R/L - 467992



Outside Corner

WM 204

Corner moulding has two excellent uses: protect edges from damage and abrasion, and to cover the exposed edge of surface material such as wood veneer and plastic.





Base

Base moulding is used at the junction of an interior wall and floor to protect the wall from impacts. Beyond its practical use, base moulding can be used to conceal the gap between your floor and wall or set off the different materials you've chosen.



BASE GM 22 9/16 x 5-1/4 PINE - R/L - 164893 PRIMED - R/L - 543029




BASE LWM 163E 11/16 X 5-1/4 MDF - R/L - 626460



BASE LWM 163E 9/16 X 4-1/4 JPRMD - R/L - 695207



BASE LWM 163E 9/16 X 5-1/4 JPRMD - R/L - 695206



BASE LWM 163E 15MM X 7-1/4 MDF - R/L - 714849




BASE LWM 163E 15MM X 7-1/4 VICTORIAN PRMD MDF - 16' - 652193




BASE GM 187 5/8 x 7 MDF - R/L - 719703



BASE GM 296 5/8 x 4-1/4 MDF - R/L - 710558




BASE GM 296 5/8 X 5-1/4 MDF - R/L - 710559



GM 296 5/8 X 7-1/4 MDF - R/L - 710560



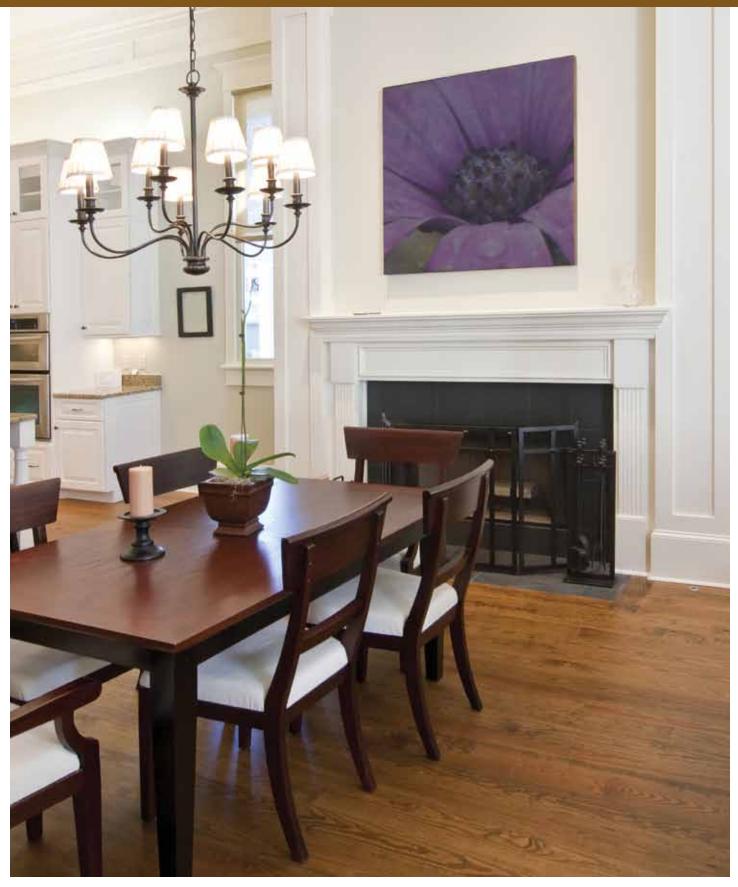



BASE GM 312 5/8 X 5-1/4 MDF - R/L - 678962



BASE GM 314 9/16 X 4-1/4 MDF - R/L - 719687



BASE GM 343 9/16 X 4-1/4 JPRMD - R/L - 695224



BASE GM 423 7/16 X 4-1/4 MDF - R/L - 719704



BASE WM 613 5/8 X 6-1/2 MDF - R/L - 698263



BASE WM 618 9/16 X 5-1/4 PINE - R/L - 155300



BASE LWM 620 1/2 X 4-1/4 OAK - R/L - 375007




BASE LWM 620 12MM X 4-1/4 MDF - R/L - 628743



BASE WM 620 9/16 X 4-1/4 COLONIAL PINE - R/L - 113368 PRMD - 16' - 262904 JPRMD - 16' - 695205



BASE WM 623 9/16 X 3-1/4 PINE - R/L - 100273 JPRMD - 16' - 695204



BASE LWM 623 9/16 X 3-1/4 COLONIAL PRMD MDF - 16' - 429249



BASE LWM 633 12MM X 3-1/4 MDF - R/L - 628694



BASE LWM 633 3/8 X 3-1/4 OAK - R/L - 240646




BASE LWM 633 7/16 X 3-1/4 COLONIAL PINE - R/L - 175322 JPRMD - 16' - 695203



BASE LWM 634 3/8 X 3 OAK - R/L - 219169







BASE LWM 634 7/16 X 3 COLONIAL PRMD - 16' - 183927



BASE LWM 634 12MM X 3 MDF - R/L - 634226



BASE LWM 725 3/8 X 2-3/4 OAK - R/L - 272873



BASE WM 663 9/16 X 3-1/4 PINE - R/L - 177116 PRMD - 16' - 216298



BASE

WM 713

9/16 X 3-1/4

PINE - R/L - 138676

BASE LWM 713 7/16 X 3-1/4 PINE - R/L - 200705



BASE WM 714 9/16 X 3 PINE - R/L - 101895



BASE WM 723 7/16 X 3-1/4 PINE - R/L - 115837 PRIMED - R/L - 525708

BASE LWM 723 3/8 X 3-1/4 OAK - R/L - 240647





BASE

7/16 X 3

LWM 724

PINE - R/L - 174658

PRIMED - R/L - 174093




BASE LWM 724 3/8 X 3 OAK - R/L - 219171



BASE GM 7608 1/2 X 3-1/4 OAK - R/L - 715311



BASE GM 7618 1/2 X 4-1/4 OAK - R/L - 658248



BASE GM 7628 1/2 X 5-1/4 OAK - R/L - 658249



BASE GM 7650 15MM X 5-1/4 MDF - R/L - 662624



BASE GM 7650 15MM X 7-1/4 MDF - R/L - 710561



BASE GM 7655 3/4 X 5-1/4 OAK - R/L - 624867

BASE SCIW 9/16 X 4-1/4 JPRMD - 16' - 677671



Base Cap

Base caps are used as an addition to regular baseboard moulding to create a finished and more complex architectural molding. Demonstrate the special care you've applied to the overall look of your home by spending extra time on the small touches.





BASE CAP WM 163 11/16 X 1-3/8 PINE - R/L - 193485

BASE CAP GM 400 5/8 X 1-3/4 PINE - R/L - 446114 PRIMED - R/L - 543028



Base Shoe

Generally used when the floor finish is hard, a base shoe is a small moulding combined with a base moulding to complete the trimming of the wall and floor intersection. Base shoes should work in harmony, or otherwise blend in, with the rest of your base applications.

.





BASE SHOE

WM 126 1/2 X 3/4 OAK - 8/0 - 125295 OAK - R/L - 160159 PINE - 8/0 - 128657 PINE - R/L - 698994 PRIMED - R/L - 646367



BASE SHOE WM 126 1/2 X 3/4 PINE - R/L - 109129



BASE SHOE WM 129 7/16 X 11/16 PINE - R/L - 195551





Handrail

Practically speaking, a handrail is used in stairwork to follow the pitch of the stair for grasping by the hand. Further, handrails are a rare opportunity to show off design flair and be functional. Pine or oak moulding turns a necessity into an elegant addition for any home.



HANDRAIL WM 231 1-1/2 X 1-11/16 OAK - R/L - 309375 PINE - R/L - 698992



HANDRAIL GM 5010 2-3/8 X 2-1/4 OAK - 16/0 - 697562



Full Round

Full round moulding contains a perfect circular shape after the cutting process. Use your imagination and add an extraordinary effect with full round moulding.



FULL ROUND WM 232 1-5/8 X 1-5/8 PINE - R/L - 671073



FULL ROUND WM 233 1-1/4 X 1-1/4 PINE - 8/0 - 336124 PINE - R/L - 698993



FULL ROUND LWM 233 1-1/4 X 1-1/4 PINE - R/L - 179855





Half Round

Half round moulding results from the method of cutting veneers on an off-center lathe, which produces modified characteristics. Available in pine, the half round moulding demonstrates your precision in creating a specific profile combination.



Quarter Round

Quarter rounds come in several sizes and serve a variety of functions. They are most often used with baseboards in the same function as base shoes.



QUARTER ROUND WM 103 1-1/16 X 1-1/16 PINE - R/L - 158130



QUARTER ROUND WM 106 11/16 X 11/16 PINE - R/L - 196961



QUARTER ROUND WM 105 3/4 x 3/4

OAK - 8/0 - 121501 OAK - R/L - 137131 PINE - 8/0 - 279428 PINE - R/L - 198682 PRIMED - R/L - 651477



QUARTER ROUND WM 108 1/2 x 1/2 PINE - 8/0 - 177087 PINE - R/L - 175855



QUARTER ROUND WM 106 11/16 × 11/16 PINE - R/L - 196691 PINE - 8/0 - 134119



QUARTER ROUND WM 110 1/4 x 1/4 PINE - 8/0 - 165603 PINE - R/L - 112977





Screen Mould

This small moulding hides the area where a screen is attached to a frame. Frames are a decorative element in their own right, so all materials should be chosen carefully.



SCREEN MOULD WM 138 5/16 X 5/8 PINE - R/L - 179187






SCREEN MOULD WM 144 1/4 x 3/4 PINE - 8/0 - 286517 PINE - R/L - 189191



Lattice

To achieve a dignified look of regular, ordered structure, choose lattice moulding with its net-like arrangements of diagonal fillets or other straight mouldings crossing each other diagonally.

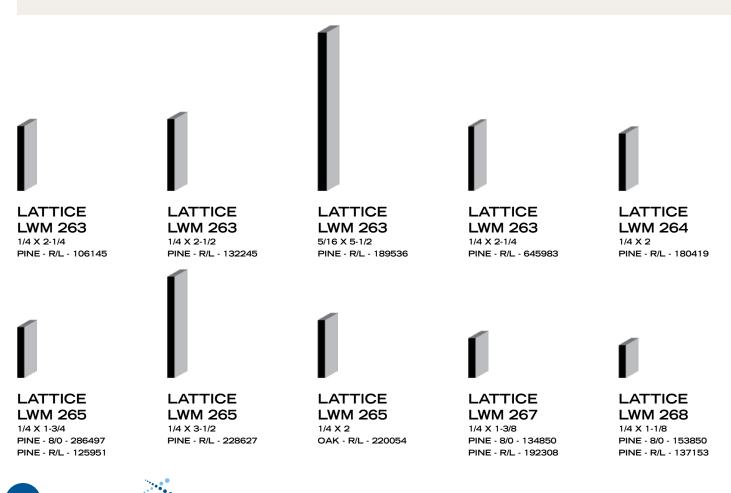



Morning Project: Enhance passages

To create passageways and windows with pizzazz, consider door and window trims. From a simple door surround to more elaborate combinations over an arched opening, elegant door trims make an impression. Any doorway can be more welcoming with decorative door trim, from the front entrance to doors leading into casual living spaces. Entry doors and grand door openings should have distinct trims. As you consider what trim will result in the appearance you're striving for, remember these tips:

- Door trim frames a large opening and affects the view of what lies ahead. If the passage opens up to a view of a nature setting (earth tones), choose white trim. If you're aiming to downplay the view of a parking lot or a neighboring building, go with darker trim, which tends to narrow the view ahead.
- Trim contributes to an overall interior look, so be sure to match the rest of the architectural elements inside the home.
- Consider using imaginative moulding configurations instead of window treatments to frame a view.
- Even bathrooms deserve special treatment; consider framing your mirrors by stacking different styles of decorative moulding.

S4S Boards

Finish boards come in either S4S (surfaced four sides) or S3S (surfaced three sides) and are used for a multitude of purposes including shelving, window liners, bases, and casing. S4S stock is reliable, workable wood that can bring out the best of your moulding project. It also boasts a fine appearance grade for staining or painting.






S4S BOARD WM 243 1-1/16 X 1-3/4 PINE - R/L - 114496

S4S BOARD WM 254 1/2 X 3/4 PINE - 8/0 - 326145 PINE - R/L - 711697



S4S BOARD LWM 246 11/16 X 2-3/4 PINE - R/L - 148601



S4S BOARD LWM 246 11/16 X 2-5/8 PINE - R/L - 216293



S4S BOARD LWM 249 11/16 x 1-5/8 PINE - R/L - 160360



Eased Two Edges Boards

E2E (eased two edges) boards provide stability in moulding profiles and are available in a variety of widths and thicknesses. BlueLinx offers proven products with the selection of surface and core characteristics that matches your vision of a dynamite room.



Square

BlueLinx square pine moulding is offered in a variety of sizes that will add value to any project.



SQUARE WM 237 1-5/16 X 1-5/16 PINE - R/L - 173747



SQUARE WM 238 1-1/16 x 1-1/16 PINE - R/L - 106710



SQUARE WM 239 3/4 X 3/4 PINE - 8/0 - 286508 PINE - R/L - 136192

Rake Mould



4.14

Slopes add subtle flair to any moulding design. As such, rake moulding is any that's adjusted at a slant, rake, or ramp.





RAKE MOULD GM 17 1-1/8 X 2-1/4 PINE - R/L - 253780 PRIMED - R/L - 235416

Shingle & Panel Mould

Revealing fine detail, shingle moulding may be used in similar ways as panel moulding but originally was used on the rake of a building or around exterior window frames.





SHINGLE MOULD WM 182 11/16 X 1-5/8 PINE - R/L - 150820



SHINGLE MOULD WM 183 9/16 x 1-1/8 PINE - R/L - 132753



A chamfer is a beveled edge connecting two surfaces.

CHAMFER WM 995 3/4 X 3/4 BAN - R/L - 267467 PINE - R/L - 160281

Glass Bead

Glass bead is used to hold glazing in place in windows. It's also known as glass stop, cove and bead, putty bead, glazing bead, and staff bead.





GLASS BEAD WM 147 1/2 X 9/16 PINE - R/L - 172366



GLASS BEAD WM 148 3/8 x 3/8 PINE - R/L - 104929

Shelf Cleat

A cleat is installed on the dividers beneath shelves in order to support the weight of objects on the shelves.



SHELF CLEAT WM 990 11/16 X 1-1/2 PINE - R/L - 195745

Jamb

A door jamb is a finished piece of wood placed on the inside of a door frame. Usually three boards make up the door jamb, along with a threshold at the bottom.

.



JAMB INT JMB 11/16 X 4-7/8 ULTRA PRIMED - 6/8 - 731566 PRIMED - 6/8 - 283086 ULTRA PRIMED - 7/0 - 123326



JAMB INT JMB 11/16 X 4-5/8 MDF - 6/8 - 579518



đ,

JAMB INT JMB 11/16 X 4-9/16 OVEN - 6/8 - 540345 - LUMBER CORE EDGE WRAPPED PINE - 6/8 - 219856 PRIMED - 6/8 - 262418 PRIMED - 7/0 - 564451 P-VEN - 6/8 - 563796 - PB CORE EDGE WRAPPED P-VEN - 6/8 - 563769 - PB CORE EDGE WRAPPED P-VEN - 6/8 - 563349 - PB CORE EDGE WRAPPED O-VEN - 6/8 - 563349 - PB CORE EDGE WRAPPED O-VEN - 6/8 - 563346 - LUMBER CORE EDGE WRAPPED JPRMD - 6/8 - 698379 ULTRA - 6/8 - 731669 ULTRA - 7/0 - 123263


Frame


A frame is the utility part of a door frame, where the door is hinged.




FRAME FRM SR 1-13/16 X 5-1/4 PRIMED - 6/8 - 300613



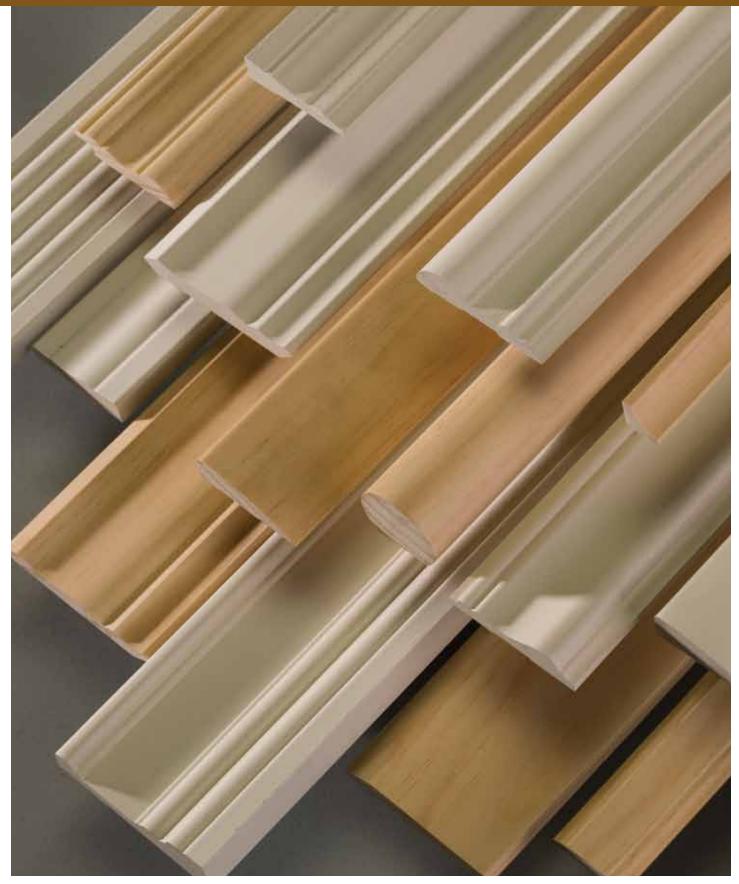

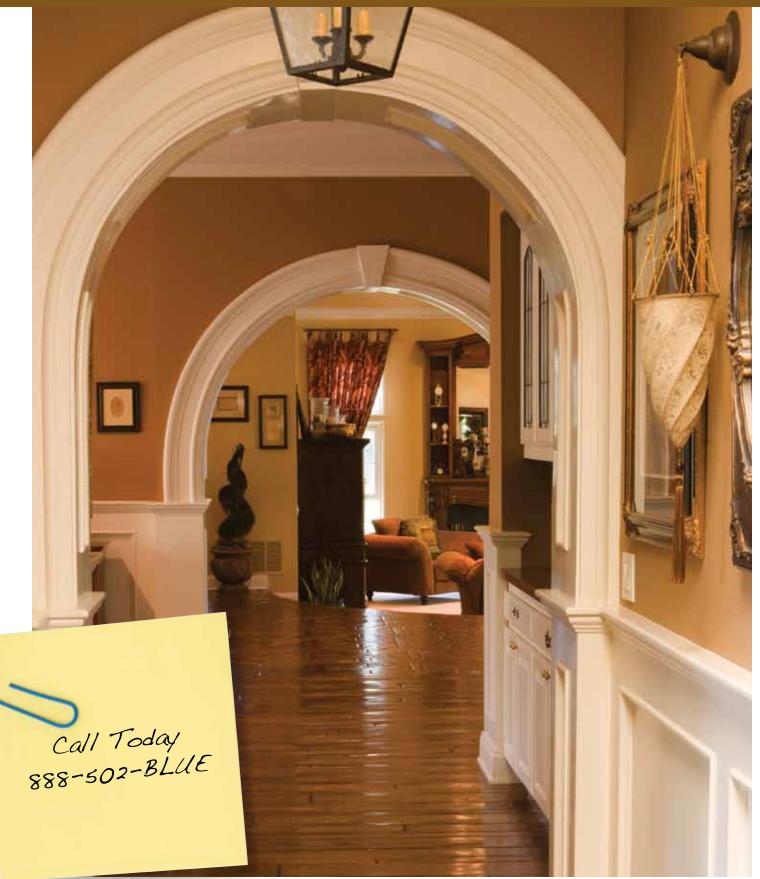

LET BLUELINX BE YOUR WAREHOUSE

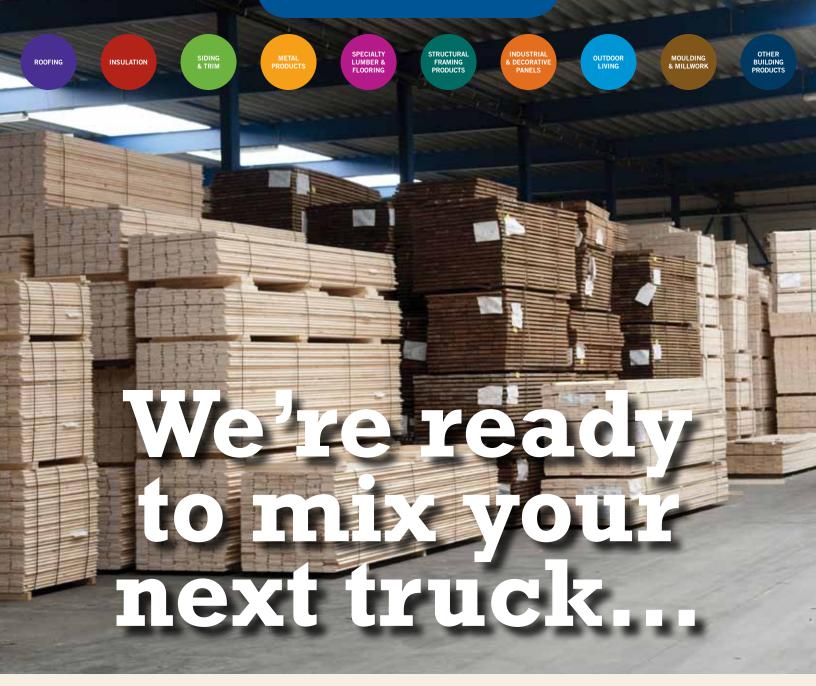

Over 70,000 different ways.

Call BlueLinx and gain access to the industry's leading selection of building products – more than 70,000 SKUs!

Lower your storage and transportation costs by ordering quantities that fit your needs. Receive express turnaround time on all orders. Get the customer service our seasoned professionals are known for.



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. @2010 BlueLinx Corporation. All rights reserved.

LET BLUELINX BE YOUR WAREHOUSE



Get down to e-business!

Focus on your customers, not transactions.

Easy, effective and efficient. Conducting e-business improves business productivity by linking to customers or vendors and exchanging data.

How do you avoid wasting time? Simple. Call BlueLinx!

E-business, the buying and/or selling of goods via electronic means, is easy, effective and efficient. Conducting e-business improves business processes and productivity by linking to trading partners (customers or vendors) and exchanging data.

BlueLinx Corporation currently has applications to process the following electronic transactions for our customers and vendors:

- Purchase orders
 (inbound and outbound)
- Advanced Shipping Notice
- Payment (inbound)
- Invoices (inbound and outbound)
- Purchase order/confirmation

How is e-business a win-win for both BlueLinx Corporation and its trading partners? Improved productivity. Reduced paperwork. Improved inventory control and management. Improved ability to forecast customer demand. Improved manufacturing efficiency. Improved customer services. Increased competitiveness. Improved data accuracy and integrity. Reduced cost.

Net result, BlueLinx Corporation can exchange information with customers and vendors in minutes instead of days. It offers BlueLinx Corporation and its trading partners a new, more profitable way of doing business.

Ready to get down to e-business? Contact us at BlueLinx_EDI@BlueLinxco.com.

Sales: 888-502-BLUE • www.BlueLinxCo.com





Other Building Products

Solar
Softboard
Poly
Packaging / Shipping Boxes
Rosin Paper

PureSky Solar

Solar Central

BlueLinx has scoured the earth to bring you the best solar package available. Under PureSky Solar, our renewable energy portfolio brand, let our sales experts shed some light on the latest developments in renewable energy and offer you select solutions such as solar panels, top-rated inverters, superior mounting systems, and customized site-specific design drawings. PureSky Solar simplifies the solar experience while helping you maximize all the benefits.






PureSky Solar simplifies the solar experience, while maximizing all the benefits.

- Superior reliability & performance system by SolarWorld
- Largest PV manufacturer in the US since 1977
- Highest energy yield compared to other major brands
- Leading 25 year power warranty (first in the industry)
- Made, manufactured and distributed in the United States


Solar Annual Output

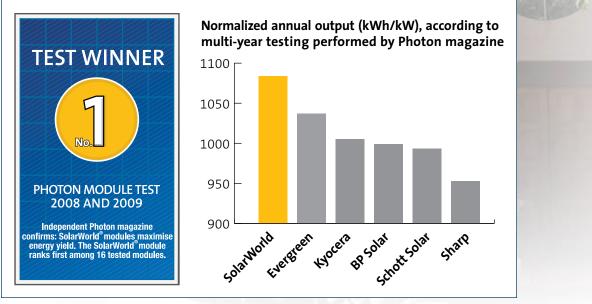

Just the facts

Modules by SolarWorld

- Meets or exceeds the latest electrical codes for safety and durability
- Manufactured in ISO 9001:2000 certified factories
 Tested and retested to withstand hail, extreme heat.
- high winds, and heavy snow loads
- Up to 10% more kWh/kW than other modules
- Superior low-light performance through cell texturing
- Guaranteed rated power
- ▶ 113 psf for IEC 61215 heavy load compliance
- NEC 2008 compliant cable and connectors

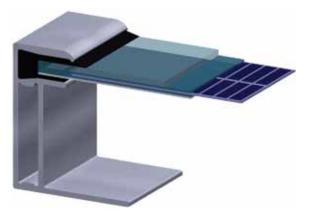



Inverters by SMA

- Certified to the new UL 1741/IEEE 1547
- 10 year warranty standard, up to 20 years optional
- Comprehensive communications and data collection
- Rugged powder coated aluminum
- Exceptional reliability and energy capture ratio
- Easy to install three-point mounting system
- Modular design is easily expandable

Complete System includes:

- SolarWorld Sunmodules
- SMA SunnyBoy Inverter
- DC-cables with NEC 2008 Compliant MultiContact® connectors
- Quality racking mount hardware
- Detailed custom electrical & installation drawings
- PV system components matching
- Optimal module array designs included with customized racking solutions on each job
- Tailored customer proposals (including estimated system payback, capital costs, etc)
- Technical support for engineering, installation, codes, and rebates
- Pre-qualification and location questionnaires
- End user financing options available
- No stocking position. Drop shipped to job site!



SolarWorld

Make eco-statements while providing functionality.



The SolarWorld group is one of the world's largest solar energy businesses. SolarWorld's family of companies dedicates itself exclusively to the business of solar energy, combining all stages of the photovoltaic value chain, from the raw material silicon to turn-key solar power plants. The SolarWorld group offers products ranging from wafers and cells to PV modules for grid-coupled and grid-independent power generation to complete solar power kits and systems. SolarWorld Sunmodules repeatedly have proven to produce more energy per rated kilowatt than other major brands. SolarWorld's customized solar power systems, Sunkits[®], enable small businesses such as electrical contractors to offer reliable, cost-effective systems. By providing training and design services as well as photovoltaic components, the Sunkits program helps small businesses enter the fast-growing industry.



The forecast calls for solar

According to USA Today, solar power accounted for under one percent of U.S. electric energy in 2007. Wind, biomass and geothermal were far more widely deployed. Just in the past three years, technology, education, government incentives and sheer dedication to reshaping the planet into a sustainable life force for generations to come have fueled a burning demand for solar industries. For the space of building construction alone, the forecast is extremely bright:

- 20% to 30% annual growth rate for solar products in the U.S.
- \$39 billion market anticipated by 2014
- 26 billion solar panel units in service by 2014
- An increase in governmental and local incentives to switch to solar

Solar Attic Fans – Natural Light Energy

ITEM #	SIZE	DESCRIPTION	COVERAGE
1142 <mark>05</mark>	10 WATT	ATTIC BLK SOLAR FAN NL ENERGY 25 YR WARRANTY	1500 SQ FT
1387 <mark>41</mark>	10 WATT	GABLE BLK SOLAR FAN NL ENERGY 25 YR WARRANTY	1500 SQ FT
1142 <mark>54</mark>	20 WATT	ATTIC BLK SOLAR FAN NL ENERGY 25 YR WARRANTY	2000 SQ FT
138756	20 WATT	GABLE BLKSOLAR FAN NL ENERGY 25 YR WARRANTY	2000 SQ FT
128272	20 WATT	ATTIC BLK SOLAR FAN REMOTE PANEL NL ENERGY 25 YR WARRANTY	2000 SQ FT
138727	30 WATT	ATTIC BLK SOLAR FAN NL ENERGY 25 YR WARRANTY	2500 SQ FT
145208	30 WATT	GABLE BLK SOLAR FAN NL ENERGY 25 YR WARRANTY	2500 SQ FT
128297	30 WATT	ATTIC BLK SOLAR FAN 30WATT REMOTE PANEL NL ENERGY 25 YR WARRANTY	2500 SQ FT

Solar Tubular Skylights

ITEM #	SIZE	DESCRIPTION
116070	10"	SOLAR SKYLIGHT BLK NL ENERGY BLK 25 YR WARRANTY
116095	13"	SOLAR SKYLIGHT BLK NL ENERGY BLK 25 YR WARRANTY
138560	18"	SKYLITE KIT NL ENERGY 25 YR WARRANTY
138640 2	21"	SKYLITE KIT NL ENERGY 25 YR WARRANTY

Solar Tubular Skylight Accessories

Colui	Iusului	
127898	10" 2'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
127958	10"1'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
128037	10"	ADJUSTABLE ELBOW NL ENERGY 25 YR WARRANTY
128139	10"	TURET EXTENSION NL ENERGY 25 YR WARRANTY
128166	10"	TILE SKIRT NL ENERGY 25 TR WARRANTY
128213	13" 2'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
128271	13" 1'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
128296	13"	ADJUSTABLE ELBOW NL ENERGY 25 YR WARRANTY
128325	13"	TURET EXTENSION NL ENERGY 25 YR WARRANTY
128346	13"	TILE SKIRT NL ENERGY 25 YR WARRANTY
138573	18" 2'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
138582	18" 1'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
138597	18"	ADJUSTABLE ELBOW NL ENERGY 25 YR WARRANTY
138609	18"	TILE SKIRT NL ENERGY 25 YR WARRANTY
138665	21" 2'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
138700	21"1'	LIGHT PIPE EXTENSION NL ENERGY 25 YR WARRANTY
138714	21"	ADJUSTABLE ELBOW NL ENERGY 25 YR WARRANTY



Info Corner: Anatomy of a solar panel

The manufacturing process of a solar panel, and SolarWorld's panels in particular, involves four main steps: crystal growing, wafering, solar cell production and solar panel assembly.

SolarWorld heats and melts polysilicon rock until it forms a whitehot liquid, then re-fuses the molten silicon into a single giant crystal in which all atoms are perfectly aligned in a desired structure and orientation.

A silicon crystal must change shape several times before it winds up as the precisely calibrated wafers that form the foundations of photovoltaic cells. This complicated process is known as wafering.

Solar cell production, or the conversion of wafers into cells, is the multi-step phase that creates a cell that flourishes with sunlight.

The final assembly step is moduling. At SolarWorld, module manufacturing is a highly automated process, relying on robust steel robotics to undertake the increasingly heavy lifting of assembling lightweight PV cells into modules weighing around 45 pounds apiece. First, cells are soldered together into strings of 10, using an over-under-overunder pattern of metal connectors to link the cells. Six strings are laid out to form a rectangular matrix of 60 cells. Each matrix is laminated onto glass. Once a frame and junction box are affixed, voilá! A solar panel is ready to be inspected and shipped. *Source: SolarWorld*

OTHER BUILDING PRODUCTS

Softboard

Natural insulation

Softboard is a natural way to insulate a structure and provide a healthy living environment because it's manufactured from wood fibers and sourced from FSC certified suppliers. Containing no harmful material, structural softboard wall sheathing in particular helps builders offer environmentally sound homes, commercial buildings and offices. The manufacturing process of softboard sheathing often includes wood chip blending, pulping, mat blending, forming, and trimming, board pressing, trimming operations, seal coating, and wood waste-handling operations with the major emission sources being a boiler and dryers.

Softboard Sheathing

ITEM #	SIZE	DESCRIPTION
107348	1/2 X 4 X 8	REGULAR SHEATHING C1S
494459	1/2 X 4 X 9	REGULAR SHEATHING C1S
145282	1/2 X 4 X 8	REGULAR SHEATHING C6S
185862	1/2 X 4 X 8	SOUND DEADNING HUSHBOARD
228185	1/2 X 4 X 8	STURD-I-TOP ROOF FIBERBOARD
646170	1/2 X 4 X 60	FIBERBOARD EXPANSION JOINT FILLER

ECONDIN

Poly Film

All-purpose protection

Known for its all-purpose protection against water vapor and foreign matter, poly film is tough yet pliable. Poly is also lightweight with excellent durability and isn't prone to cracking, peeling, rotting or mildew. While being highly resistant to tearing, poly's permanent flexibility even at subzero temperatures allows for countless applications in construction, agriculture, and industry. Further, acids and most other chemicals can't damage poly film.

Poly Film

IIEM#	SIZE	DESCRIPTION
208100	8'4" X 200'	1.5 MIL CLEAR POLY FILM
103716	8' X 100'	4 MIL CLEAR POLY FILM
164809	10' X 100'	4 MIL CLEAR POLY FILM
155717	12' X 100'	4 MIL CLEAR POLY FILM
160417	16' X 100'	4 MIL CLEAR POLY FILM
139396	20' X 100'	4 MIL CLEAR POLY FILM
114078	8' X 100'	6 MIL CLEAR POLY FILM
136778	10' X 100'	6 MIL CLEAR POLY FILM
170273	12' X 100'	6 MIL CLEAR POLY FILM
196631	16' X 100'	6 MIL CLEAR POLY FILM
187957	20' X 100'	6 MIL CLEAR POLY FILM
170098	32' X 100'	6 MIL CLEAR POLY FILM
146070	40' X 100'	6 MIL CLEAR POLY FILM
246014	20' X 100'	10 MIL CLEAR POLY FILM





OTHER BUILDING PRODUCTS

Packaging Supplies

Store, ship, and protect

Businesses ship hundreds of packages each year. Whether they use corrugated boxes, mailing tubes, or specialty boxes of course depends on the item to be stored and delivered. Remember to pay special attention to weight when considering your packaging needs. For instance, most white corrugated boxes comfortably hold up to 200 pounds. They improve the appearance of your shipment and can be purchased in bulk.

 $\sim \sim \sim$

PALLET COVERS) Sheets availabli Upon request

2222 MAANA

n v v v

1000

Corrugated Boxes

ITEM #	SIZE
121524	6" X 4" X 3"
121603	6" X 6" X 6"
121615	12" X 9" X 5"
121667	9" X 9" X 9"
121682	12" X 12" X 12"
121746	21.5" X 15" X 12"
123735	16.5" X 12.75" X 12.625
123766	14" X 14" X 14"
123685	18" X 18" X 18"
121372	18" X 18" X 24"

DESCRIPTION CORRUGATED BOX CORRUGATED BOX

Mailing Tubes

ITEM #SIZE1097122" X 24"1136813" X 36"

DESCRIPTION

TWIST N' PULL MAILING TUBE TWIST N' PULL MAILING TUBE

Additonal Packaging Items

 ITEM #
 SIZE

 121763
 5" X 16-3/16" X 21"

 121775
 3-1/4" X 6-3/16" X 10"

DESCRIPTION LAPTOP BOX SMALL ELECTRONICS BOX

Other sizes available upon request

* Stocked in Chicago.



Take care of your packaging needs with one phone call.

1-800-839-2588

Move.

Protect.

Strapping: steel, plastic, and woven Tools, buckles and seals Cardboard corner protectors Pallet covers and sheets Corrugated boxes in various sizes Specialty boxes (dish, wardrobe) Cushion wrap Stretch film

Ship.

Corrugated boxes in various sizes Cushion wrap Stretch film Mailing tubes



Sales: 888-502-BLUE • www.BlueLinxCo.com

BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

OTHER BUILDING PRODUCTS

Red Rosin Paper

A protective barrier

Wondering what protective barrier works best as a first layer? Red rosin paper is a high-quality, single-ply sheathing paper, which is widely used in built-up roofing systems throughout all phases of general construction. This environmentally friendly paper is manufactured from recycled fibers that are set in alum to resist bleeding. When used as an inner liner in wall, roofing, or wood flooring applications, red rosin paper acts as a separation barrier, protecting against wind and dust infiltration, while minimizing squeaks. It is compatible with coal tar and asphalt-based roofing systems.

Red Rosin Paper

ITEM # SIZE 151487 36" X 144' **DESCRIPTION** GP RED ROSIN PAPER

PACKAGE SIZE 432SF/ROLL

Edge Protectors

ITEM #	SIZE	DESCRIPTION	PACKAGE SIZE
219935	2" X 2"X .160 X 3"	CARDBOARD EDGE PROTECTORS	1080/BOX



290

11-12-

Notes:	
	5



292

	Notes:	S
		6
	C	
)
		2
_		



LINX •• AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

Notes:	8
	2
	V
<i>G</i>	
	>



LINX • AT 1-888-502-BLUE FOR DETAILS ON PRICING AND AVAILABILITY

OUTDOOF

UILDIN



Your truck is on the way.

Bluelinx

Avoid the inventory squeeze.

You don't want to run out of stock. But order too much, and you end up paying a fortune to store, handle and insure excess inventory.

Rely on just-in-time inventory from BlueLinx to save you money.



Sales: 888-502-BLUE • www.BlueLinxCo.com



We'll give you 10 reasons to order.

Organized into 10 categories, we make it easy to find what you are looking for

- and even easier to order.

It's just that simple. Let us show you how today.

Sales: 888-502-BLUE www.BlueLinxCo.com



BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

۲



We'll give you 10 reasons to order.

Organized into 10 categories, we make it easy to find what you are looking for

- and even easier to order.

It's just that simple. Let us show you how today.

Sales: 888-502-BLUE www.BlueLinxCo.com



BLUELINX and the BlueLinx design are trademarks and registered servicemarks of BlueLinx Services Inc. © 2010 BlueLinx Corporation. All rights reserved.

۲